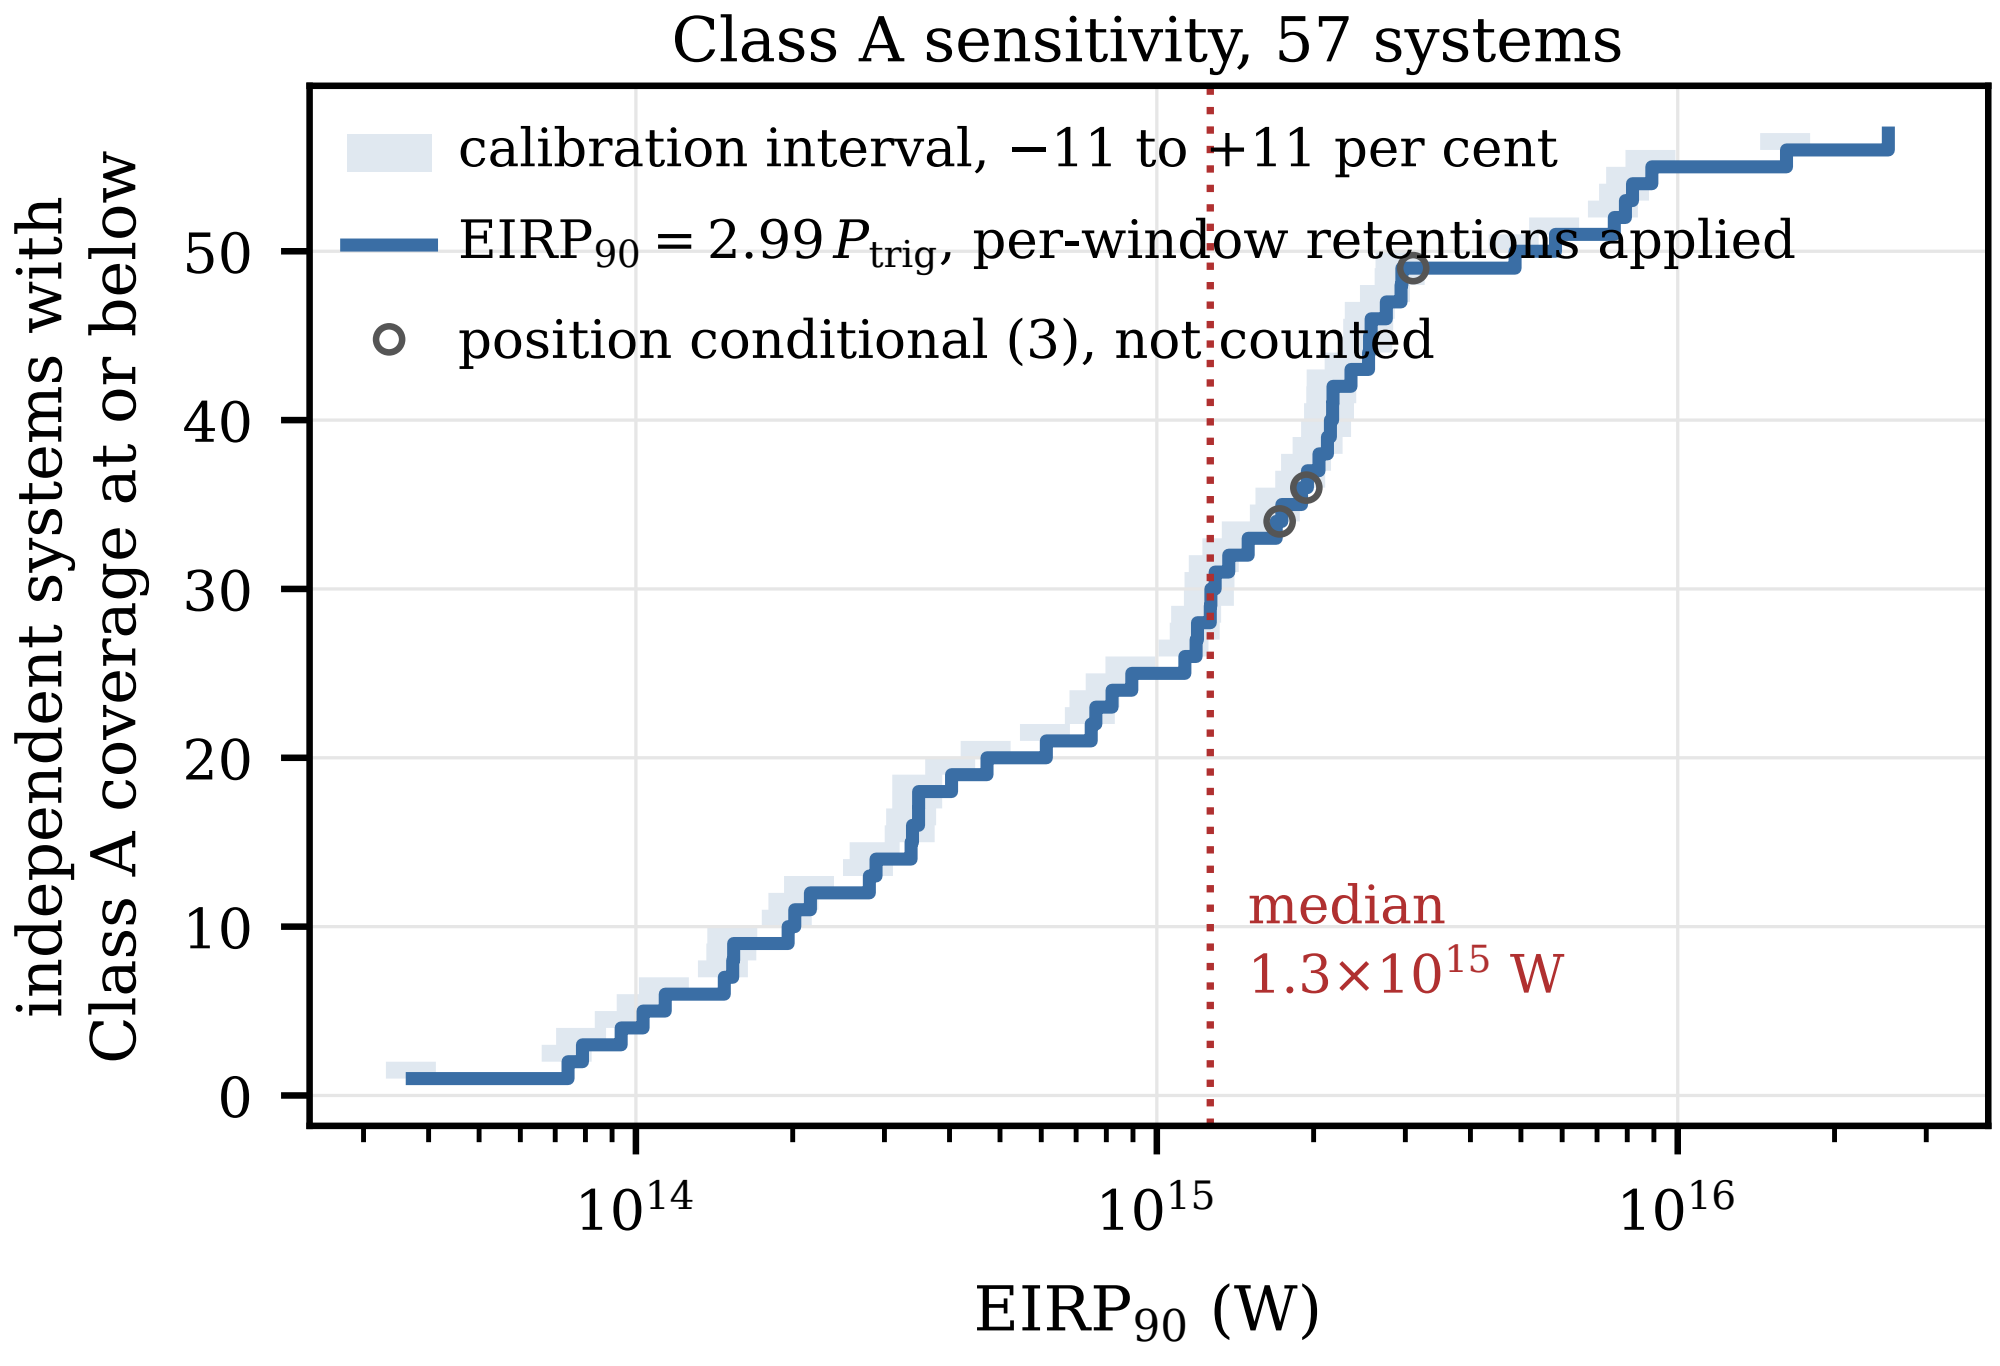
Class A sensitivity, 57 systems
calibration interval, −11 to +11 per cent
EIRP90 = 2.99 Ptrig, per-window retentions applied
position conditional (3), not counted
median
1.3×10^15 W
independent systems with
Class A coverage at or below
0
10
20
30
40
50
10^14
10^15
10^16
EIRP90 (W)