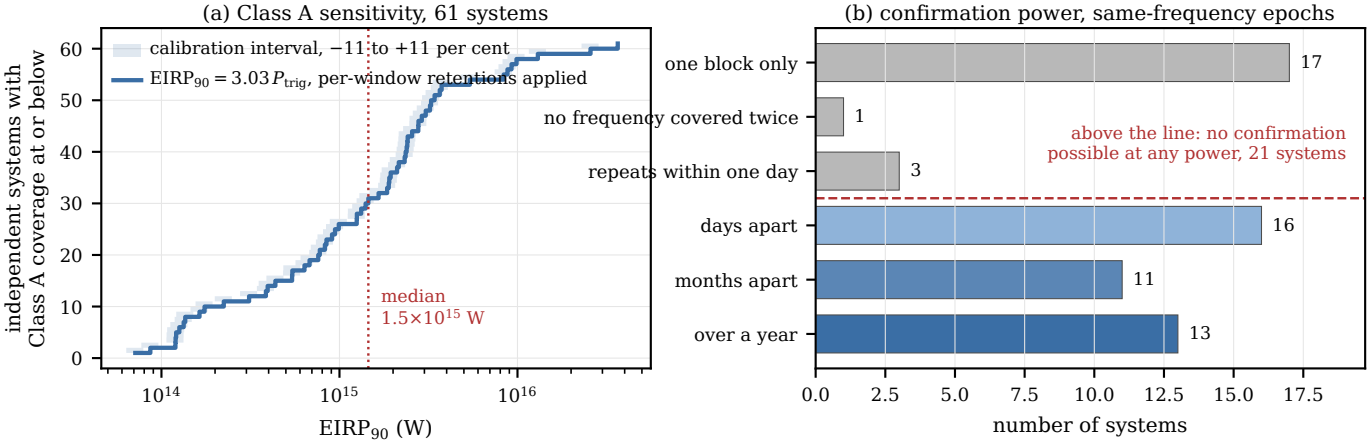
(a) Class A sensitivity, 61 systems
calibration interval, −11 to +11 per cent
EIRP90 = 3.03 Ptrig, per-window retentions applied
median
1.5×10^15 W
independent systems with Class A coverage at or below
EIRP90 (W)
(b) confirmation power, same-frequency epochs
one block only
no frequency covered twice
repeats within one day
days apart
months apart
over a year
17
1
3
16
11
13
above the line: no confirmation possible at any power, 21 systems
number of systems