




PCB2: Logic PCB

Na njem se nahajajo QM MCU, CAN transciever, EtherCAT controller, SMCU1, SMCU2




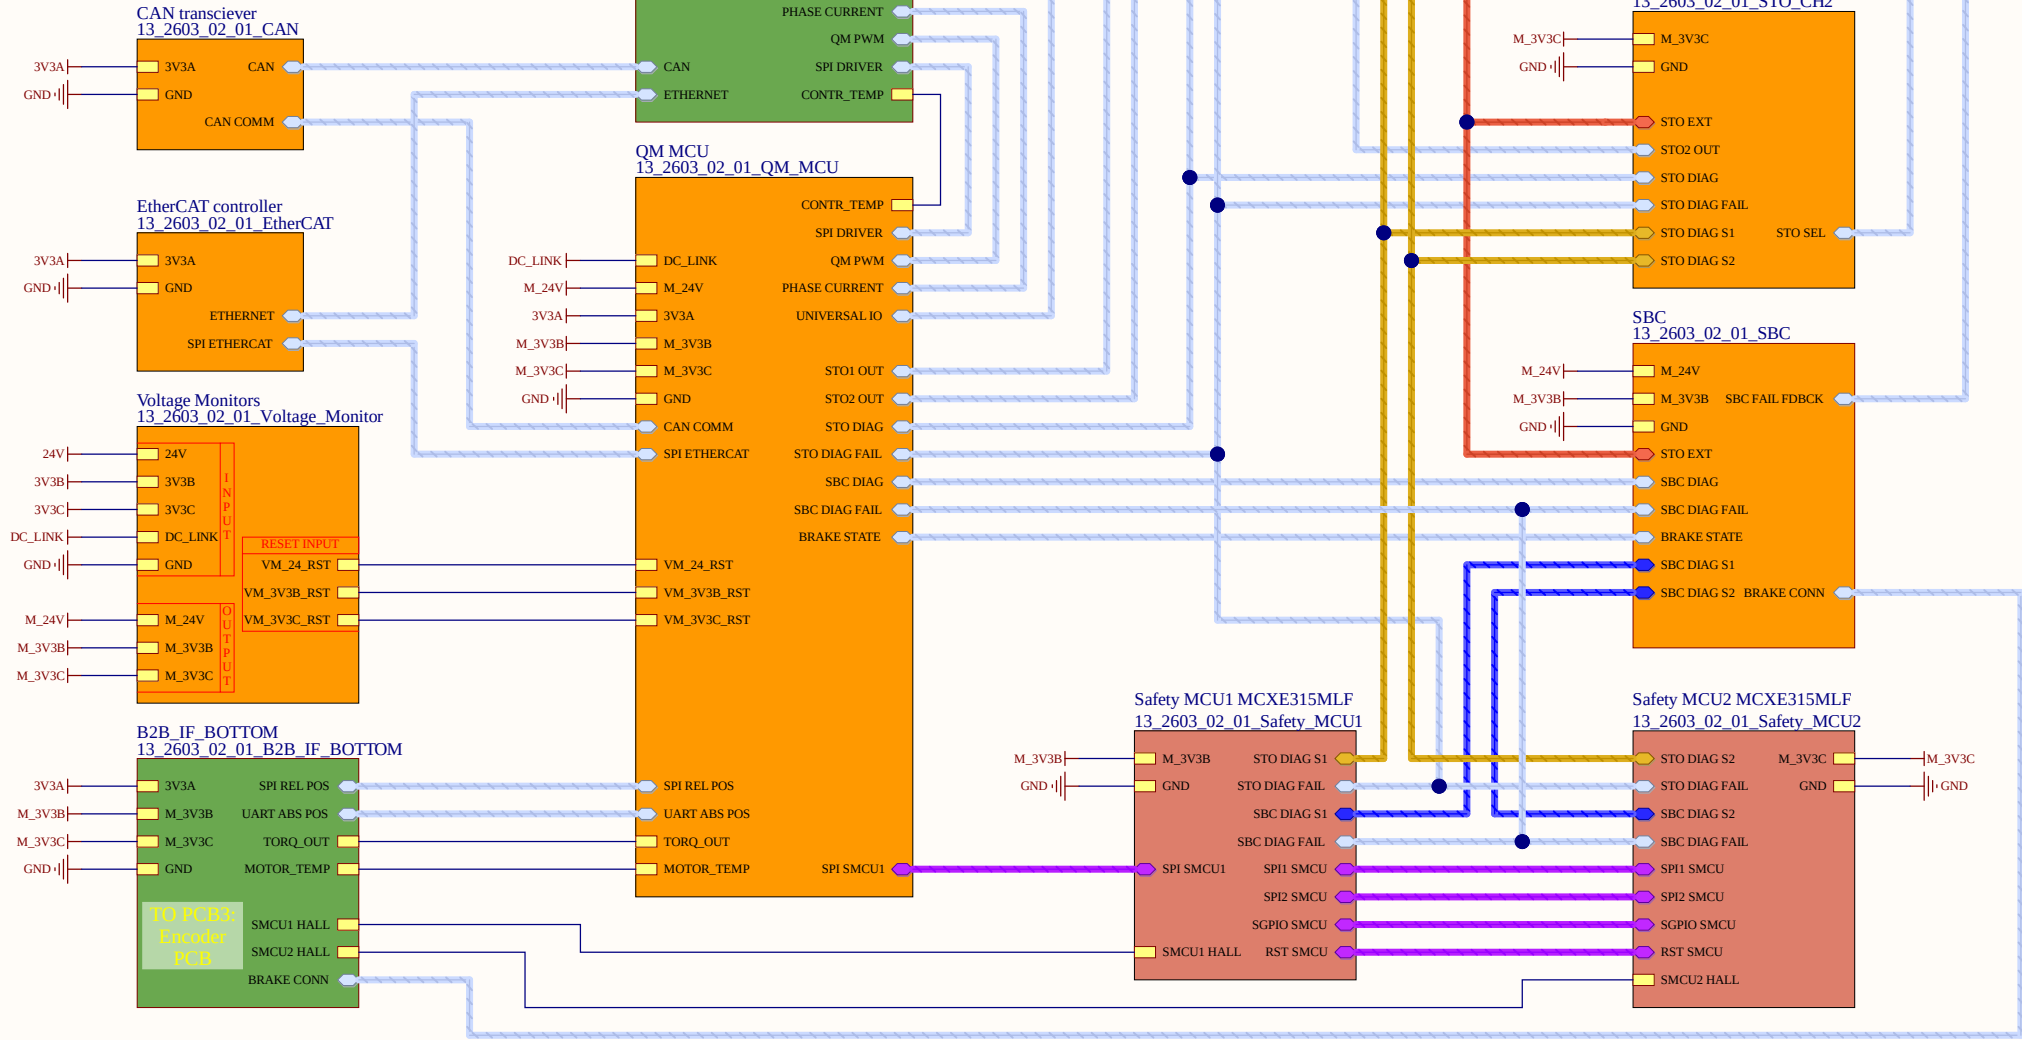


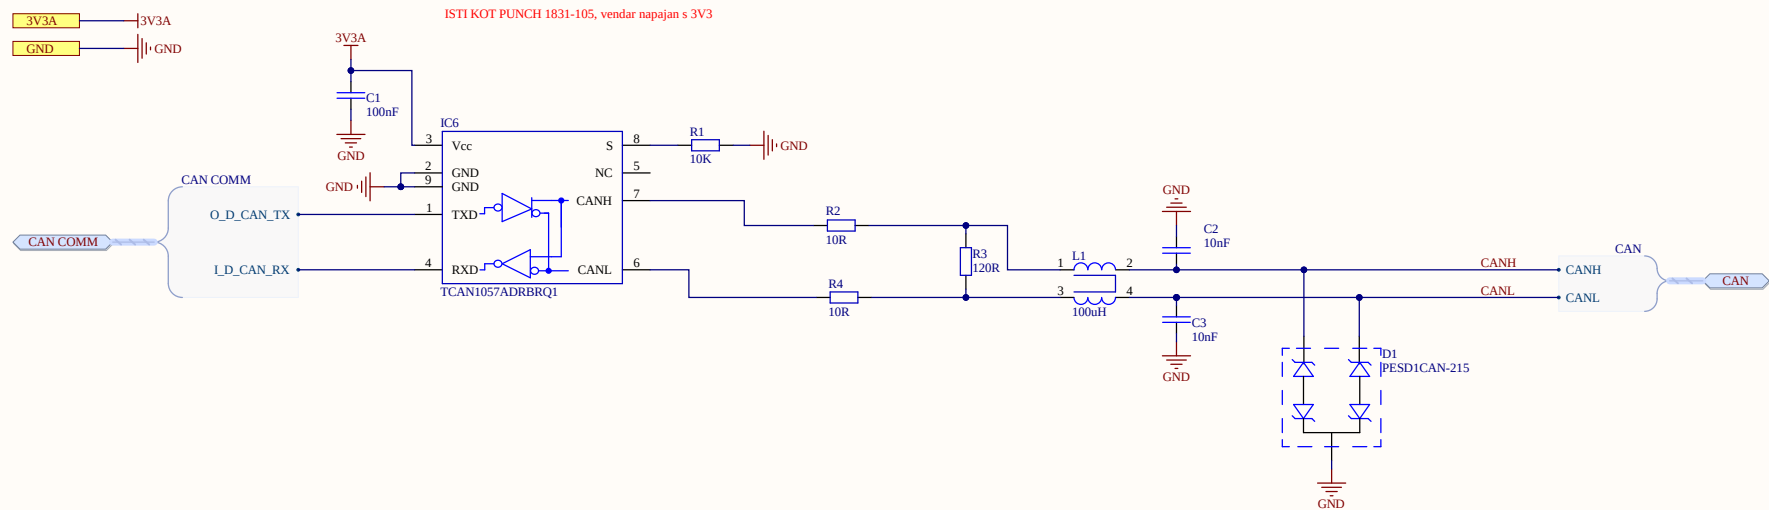


PHY Supply Filtering




Crystal

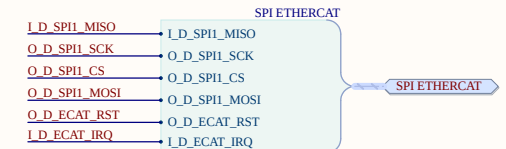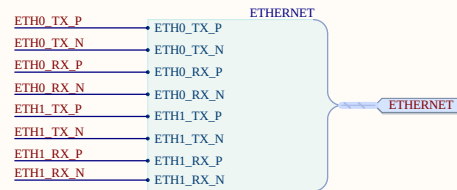


Power Supply Filtering

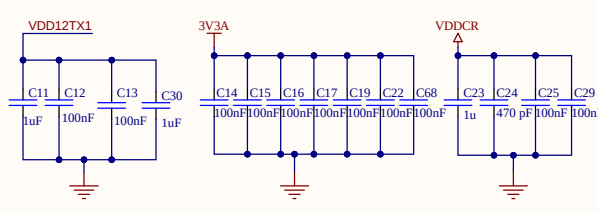

I2C EEPROM

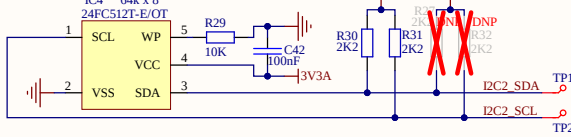


Ethernet PHY Magnetics

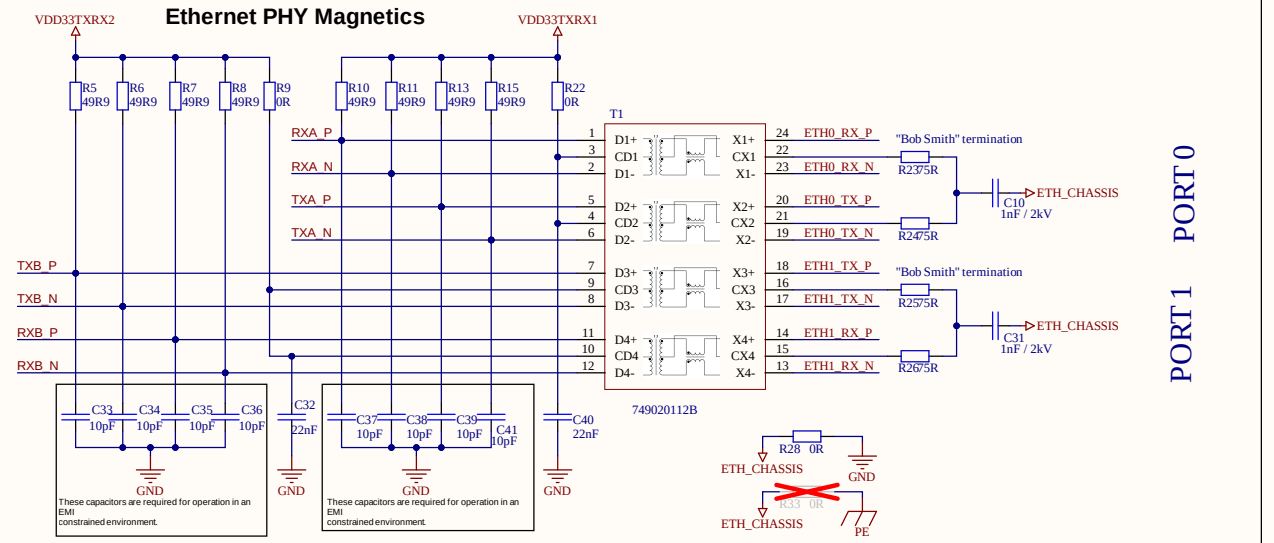



PORT 1

LAN9253 part A




















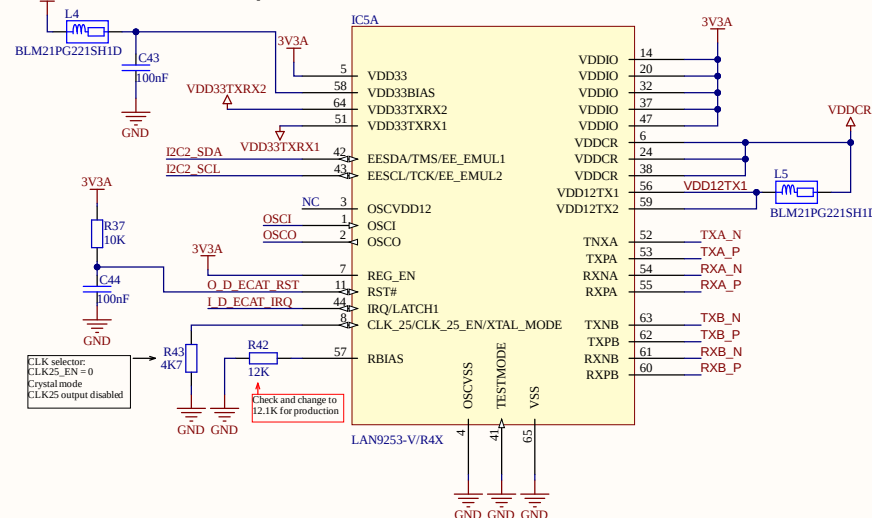


LAN9253 part B

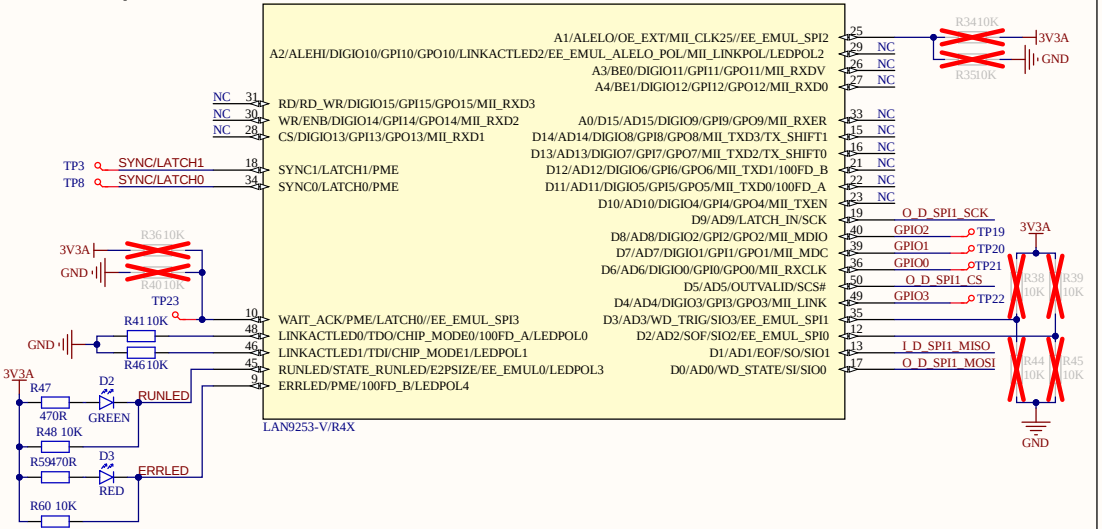


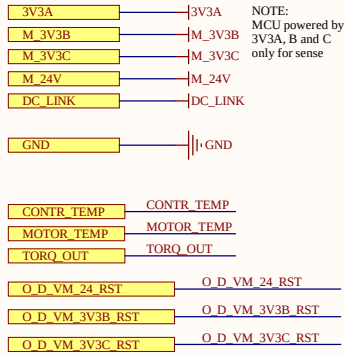


NOTE:
MCU powered by
3V3A, B and C
only for sense

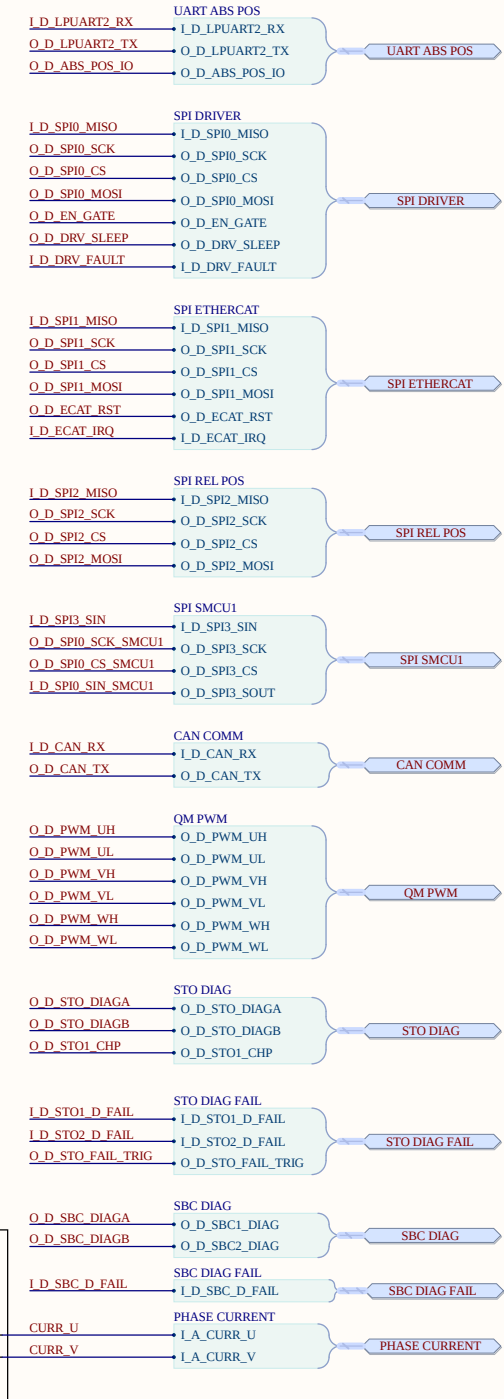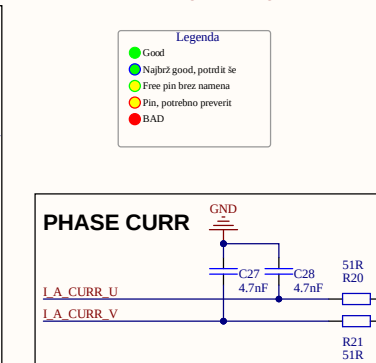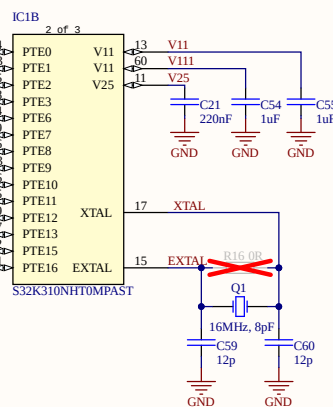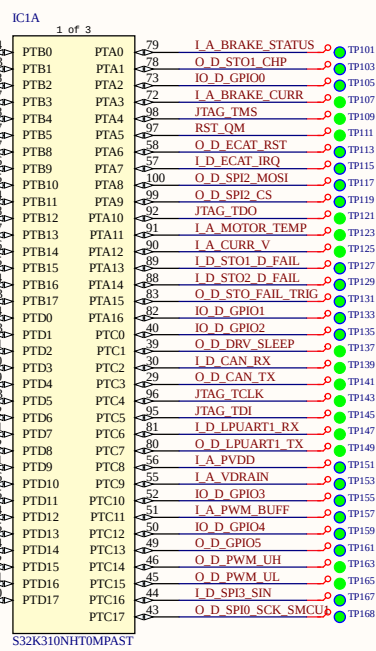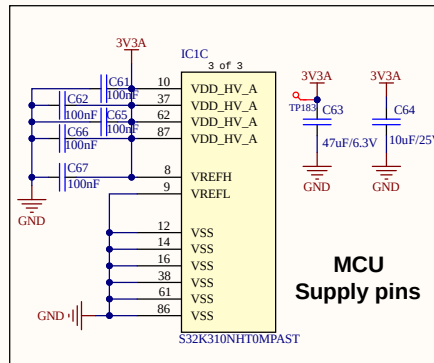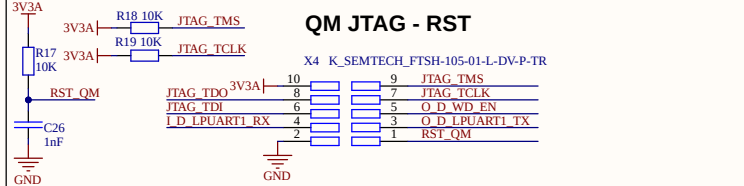







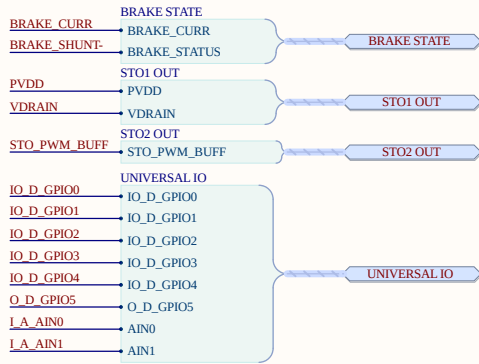




QM MCU





















SAFETY MCU 1

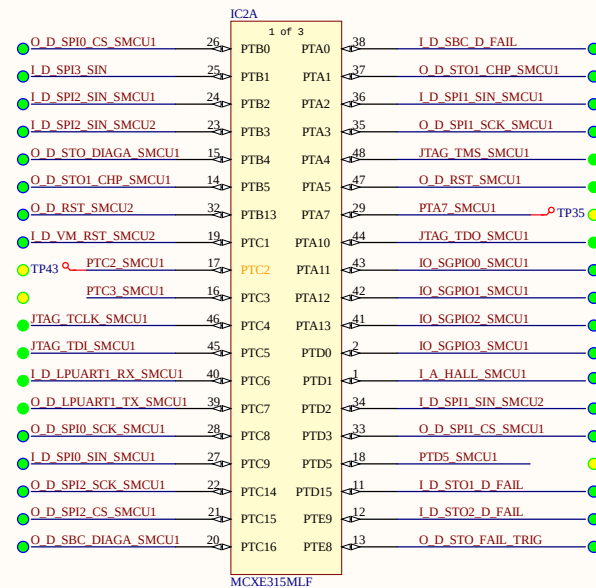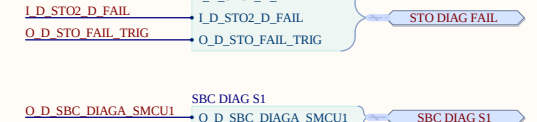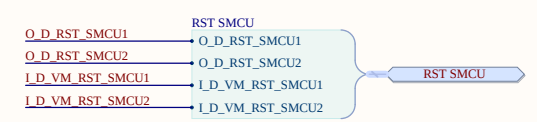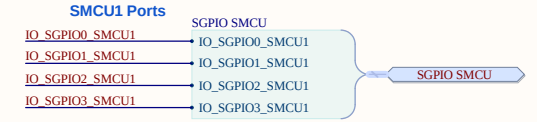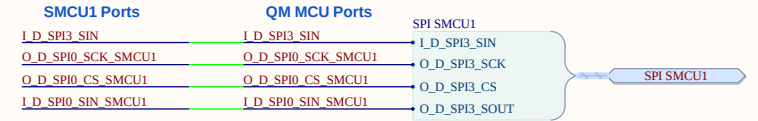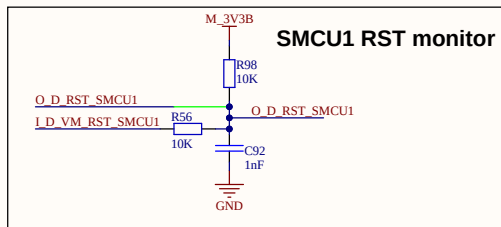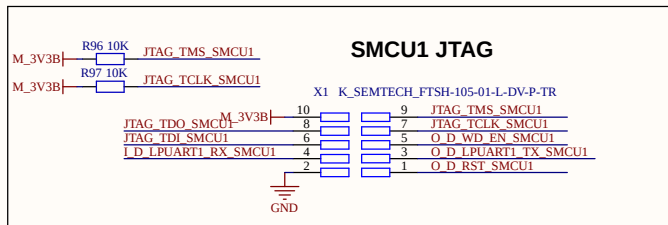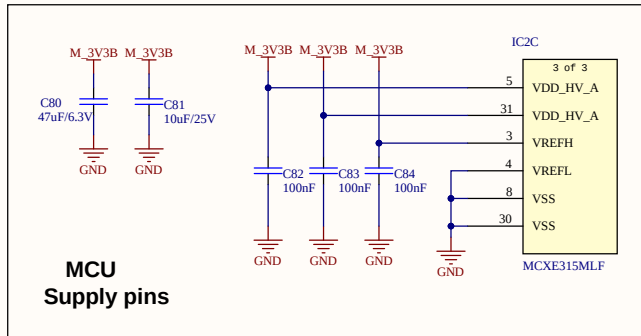














SAFETY MCU 2

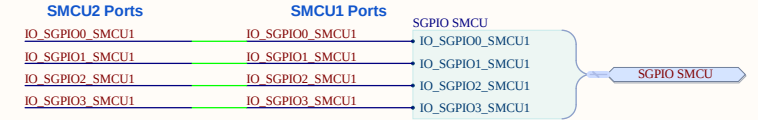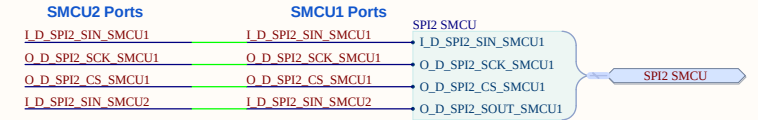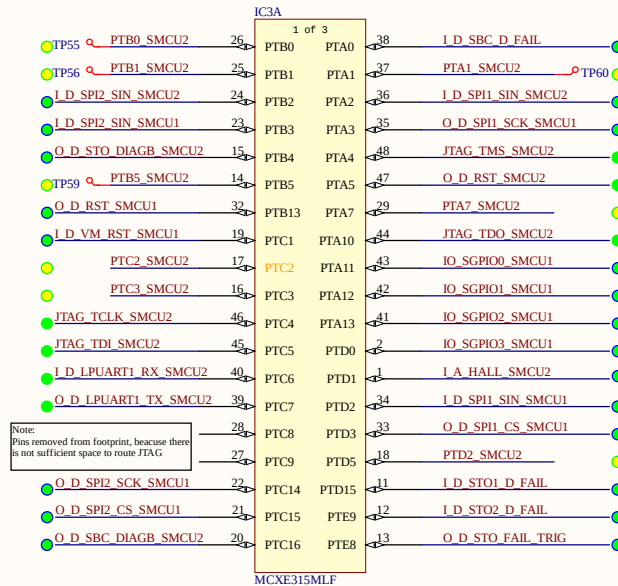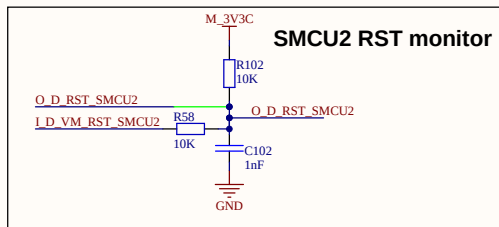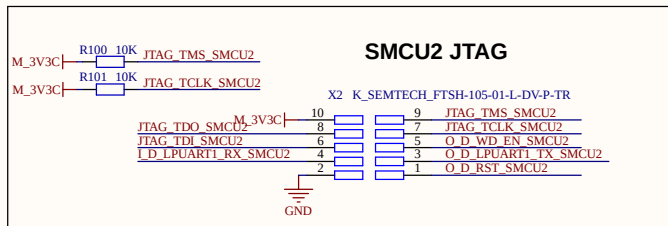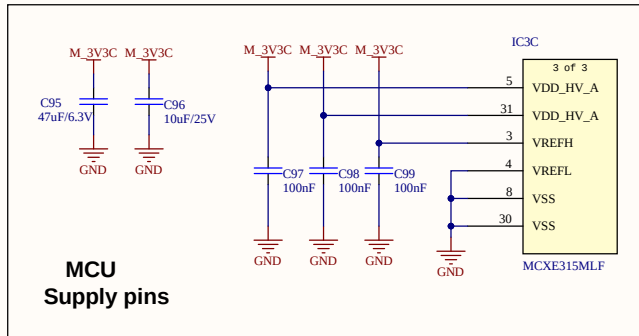

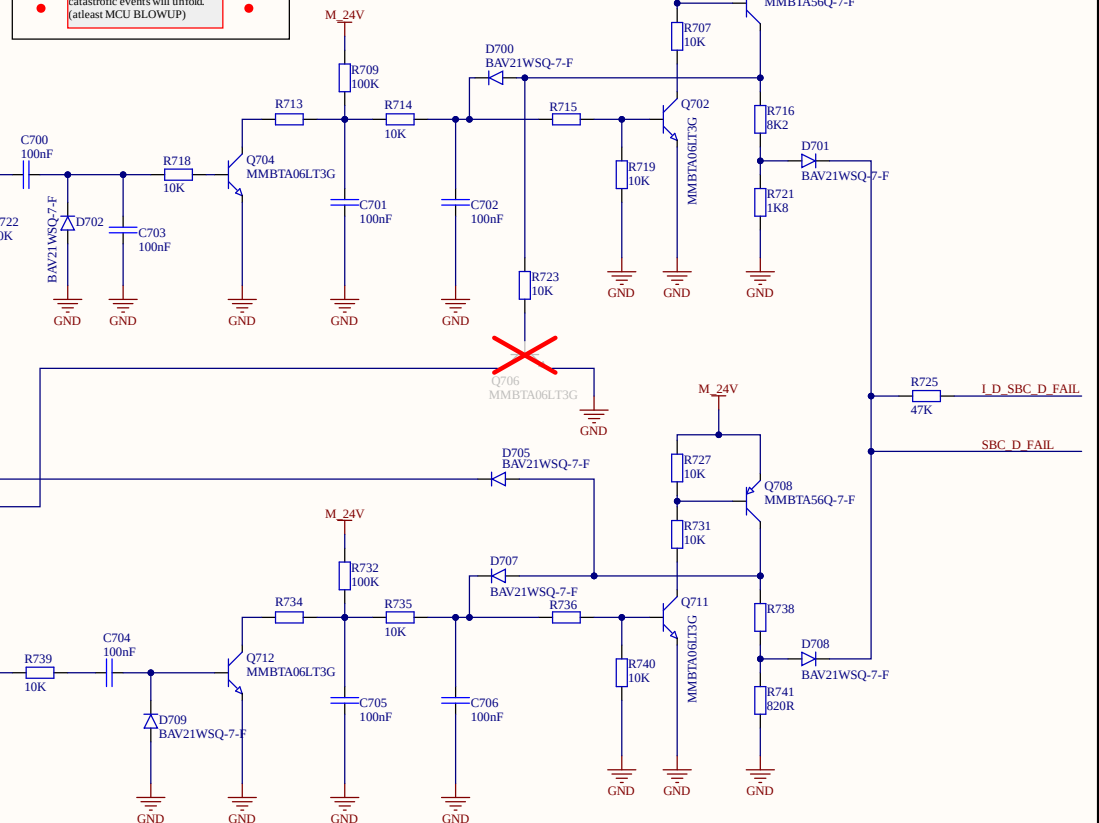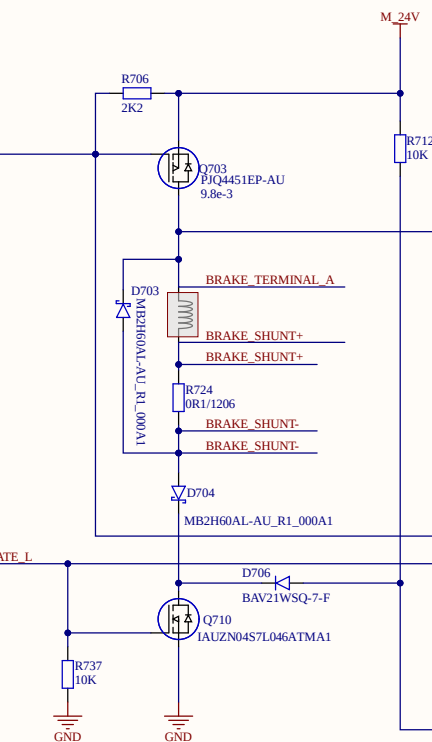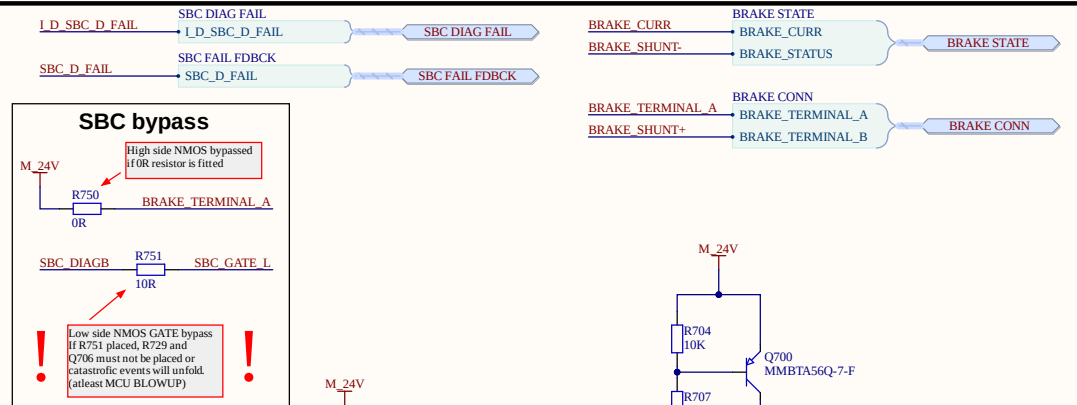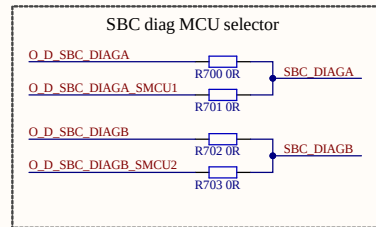

Note:
INA240 in a unidirectional mode with a ground referenced output, both reference inputs are connected to ground; this configuration takes the output to ground when there is a 0-V differential at the input

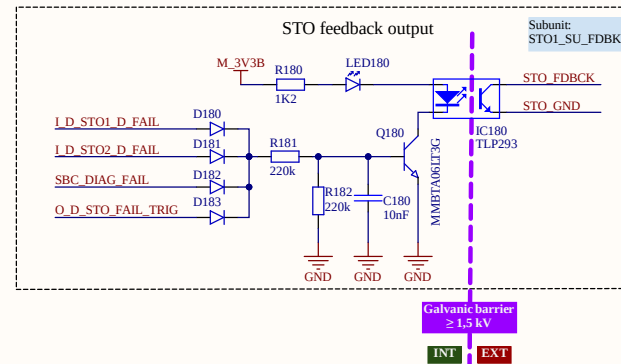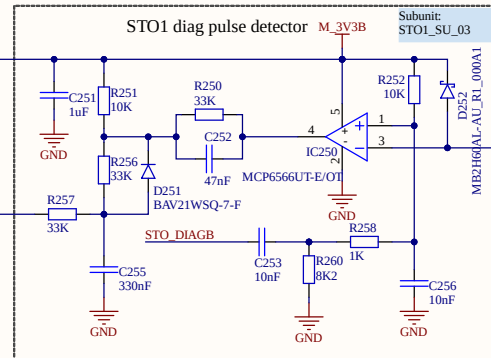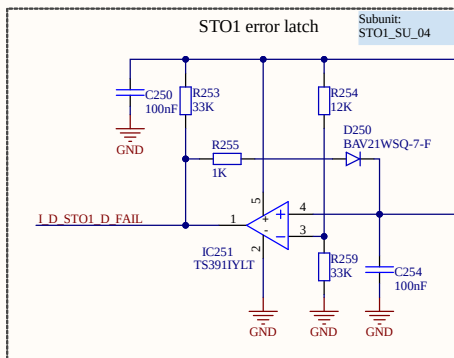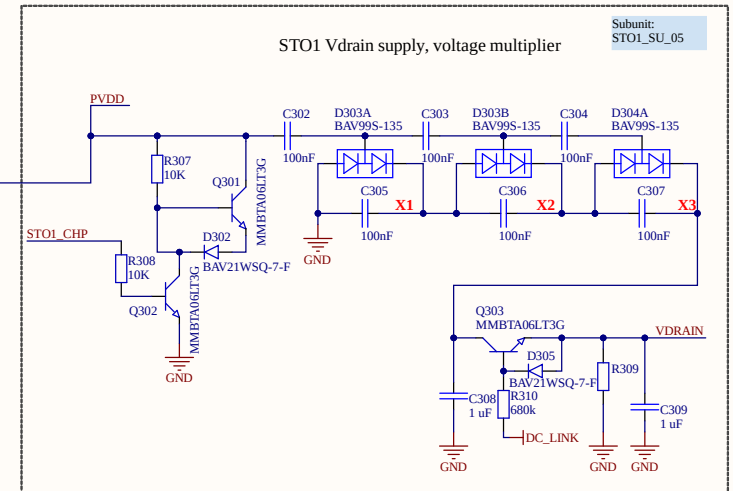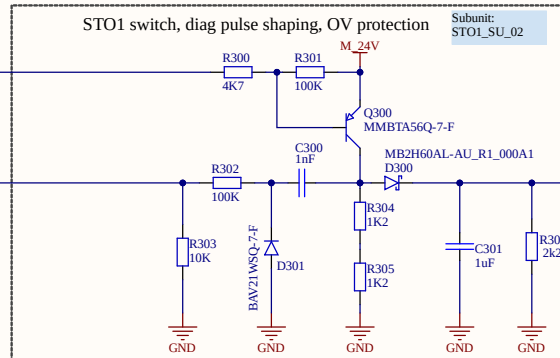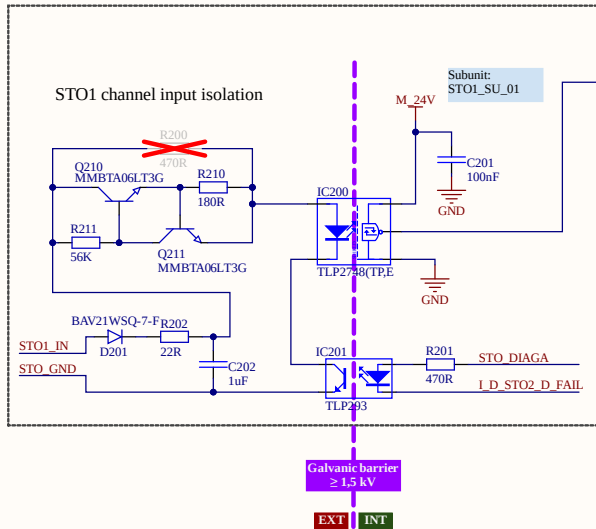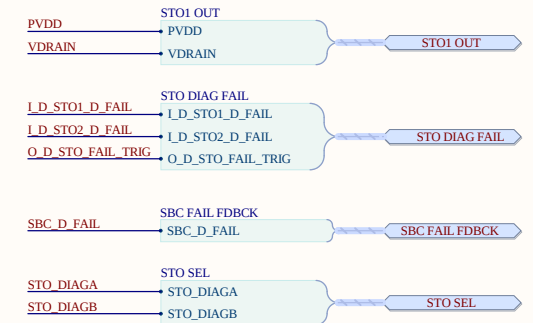


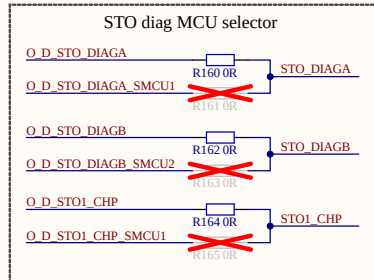
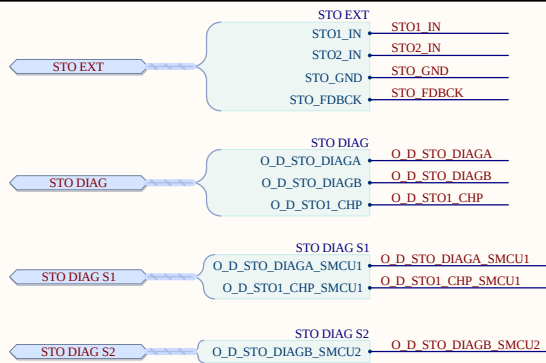


O_D_STO_DIAGA, O_D_STO_DIAGB sta signala, ki jih proizvaja MCU. Obadva sta visoka 995us in nizka 5us. Fazno sta zamaknjena za 2-3us.

I_D_STO1_D_FAIL in I_D_STO2_D_FAIL sta signala, ki sta križno povezana signala napake izostanka diagnostičnih impulzov (DIAGA in DIAGB).






STO1ACT in 2 je povezava, ki vklopja in izklopja napajanje končne stopnje oz. latchinga (zatika).

STO FDBCK je galvansko ločen signal napake za zunanjo enoto, open collector

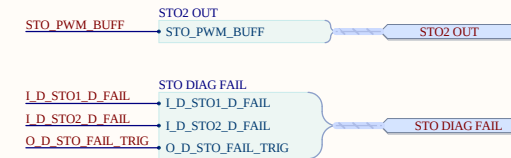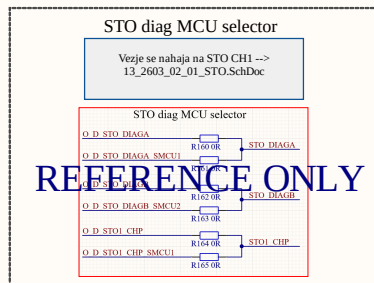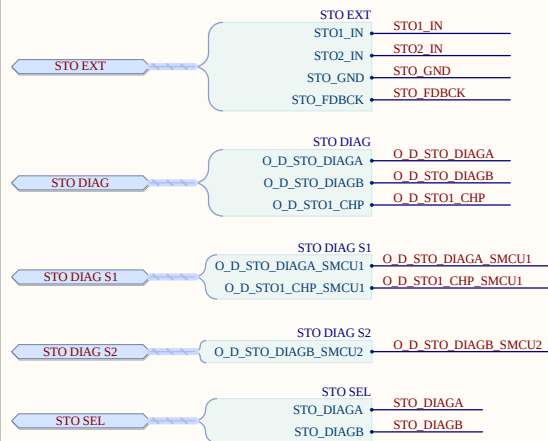

REFERENCE ONLY


REFERENCE ONLY

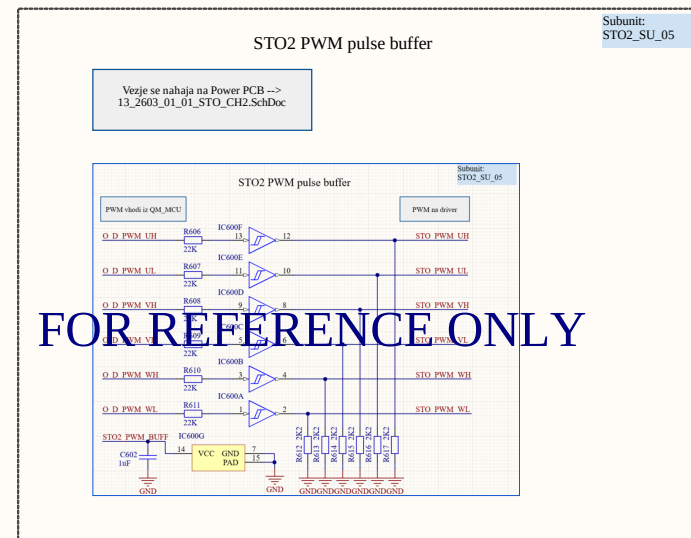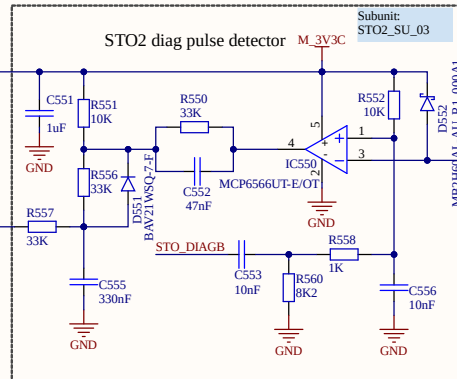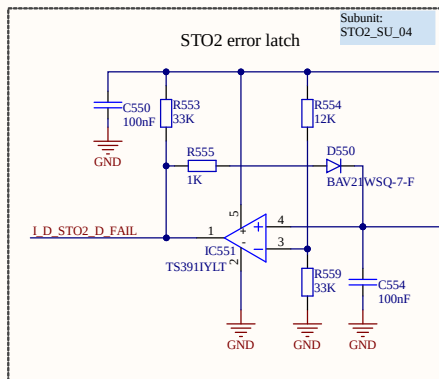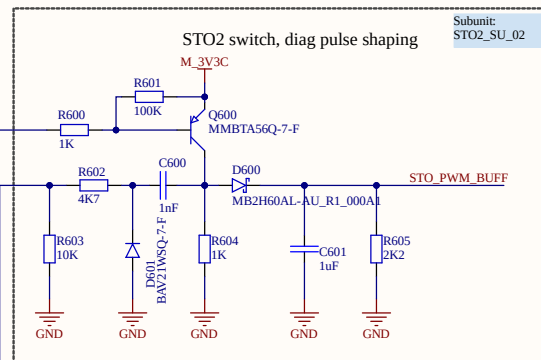
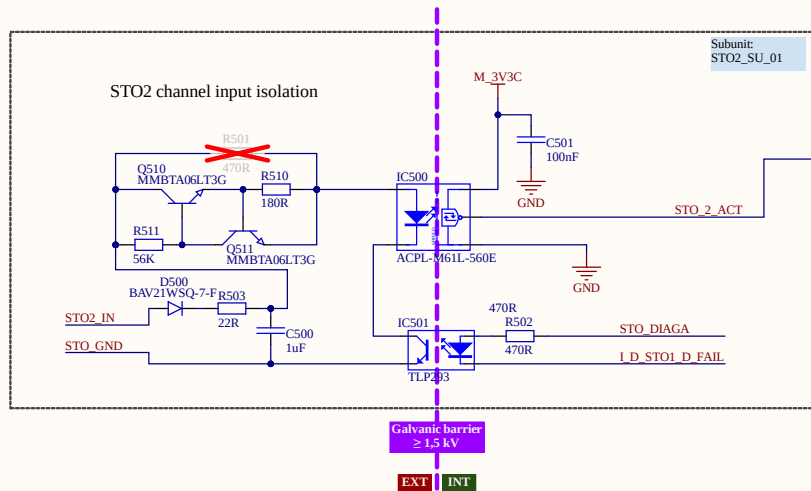


FOR REFERENCE ONLY



		X20			
	3V3A	1		2	
	3V3A	3		4	CURR_U
GND		5		6	CURR_V
		7		8	
	3V3B	9		10	O_D_PWM_UH
GND		11		12	O_D_PWM_UL
	3V3C	13		14	O_D_PWM_VH
GND		15		16	O_D_PWM_VL
	24V	17		18	O_D_PWM_WH
	24V	19		20	O_D_PWM_WL
GND		21		22	
	DC_LINK	23		24	I_D_SPI0_MISO
GND		25		26	O_D_SPI0_SCK
	CANH	27		28	O_D_SPI0_CS
	CANL	29		30	O_D_SPI0_MOSI
	IO_D_GPI00	31		32	O_D_EN_GATE
	IO_D_GPI01	33		34	O_D_DRV_SLEEP
	IO_D_GPI02	35		36	I_D_DRV_FAULT
	IO_D_GPI03	37		38	
	IO_D_GPI04	39		40	
	O_D_GPI05	41		42	ETH0_TX_P
	I_A_AIN0	43		44	ETH0_TX_N
	I_A_AIN1	45		46	ETH0_RX_P
	CONTR_TEMP	47		48	ETH0_RX_N
GND		49		50	ETH1_TX_P
	PVDD	51		52	ETH1_TX_N
	VRRAIN	53		54	ETH1_RX_P
	STO_PWM_BUFF	55		56	ETH1_RX_N
	STO_FDBCK	57		58	
	STO_GND	59		60	STO2_IN
	STO1_IN				





24V Voltage monitor




@Jaka Šter



3V3B Voltage monitor




3V3C Voltage monitor



B2B KONEKTOR

Logic PCB - Encoder PCB

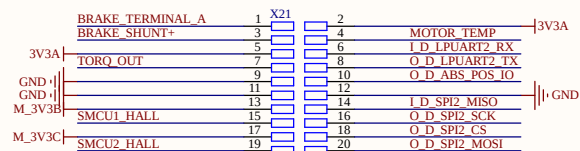

K_AMPHENOL_61083-024406LF

