



**Unidad de funcionamiento de
ambiente
CO₂/humedad/temperatura**

CONTENT

Augmented Reality (AR) - Digital meets real	2
3D preview of Unidad de funcionamiento de ambiente CO ₂ /humedad/temperatura	3
Integrate BELIMO EMEA catalog inside your CAD System	4
2D derivations and Bill-Of-Material (BOM)	5
Technical drawings	6
Technical data	7
Get a free E-Learning training for BELIMO EMEA catalog	8




Unidad de funcionamiento de ambiente

CO₂/humedad/temperatura

AR

Augmented Reality, often shortened to AR, is a technology that blends digital information into the real world. For more information, please click [here](#) or directly try yourself by scanning the QR code with your phone.

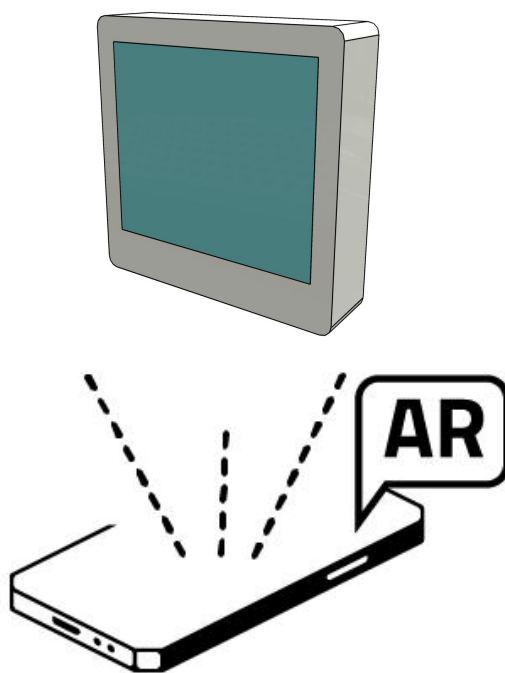

Please scan the QR code above and open on AR-enabled device.

There is a possibility that the configuration will fail. If that happens, please try a different product.



3Dfindit

powered by  CADENAS




BELIMO

Unidad de funcionamiento de
ambiente

CO₂/humedad/temperatura

3D view

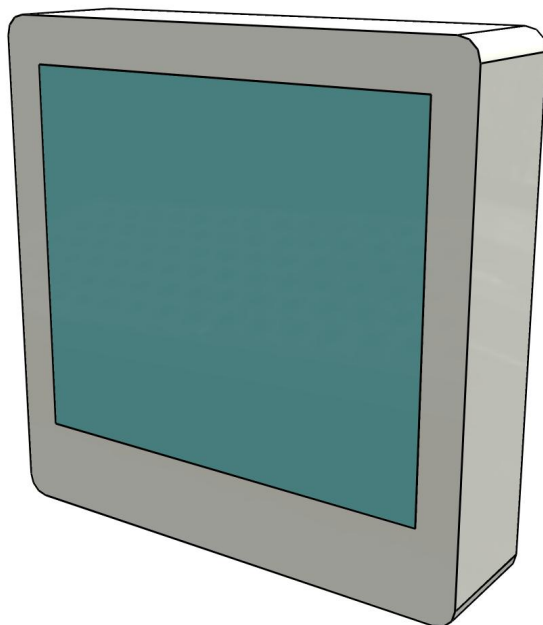

HOW TO ACTIVATE 3D?

To activate the interactive 3D view in Acrobat Reader, you need to select, at the top of the page, **Options** and then **Trust this document**

Zoom

Se mueve hacia objetos o se aleja de ellos en la pantalla cuando se mueve verticalmente. También puede hacer Zoom con la mano de las herramientas preseionando la recla Shift mientras arrastra

Pan

El modelo se puede mover solo horizontal o verticalmente. También puede girar con la mano de herramientas: Ctrl-arrastrar.

Girar

Gira objetos 3D relativos a la pantalla. Cómo los objetos se mueven depende de la vista de comienzo, donde usted empieza a arrastrar y en la dirección en la que usted arrastra.




Unidad de funcionamiento de ambiente

CO₂/humedad/temperatura

CAD plugins

With our CAD integrations, you can use 3Dfindit directly in your CAD system and make your work easier with additional comfort functions, such as replacing a part and many more.

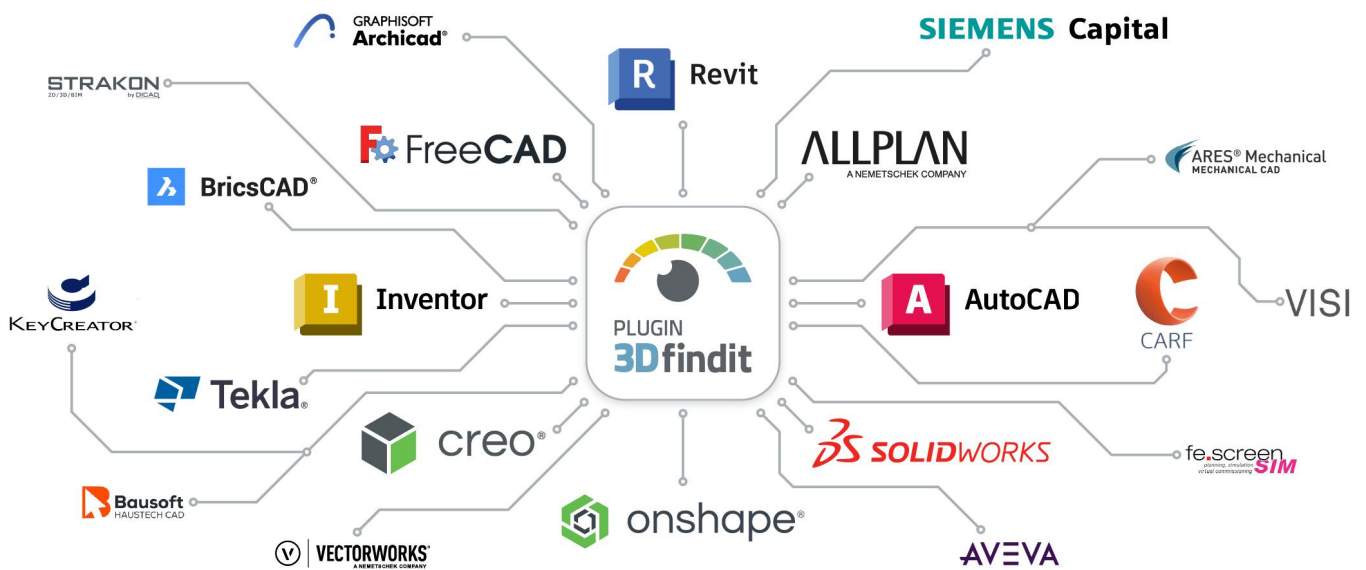

To the plugins



3Dfindit

powered by  CADENAS





BELIMO

Unidad de funcionamiento de
ambiente

CO ☐ humedad/temperatura

ISO view

2D derivation

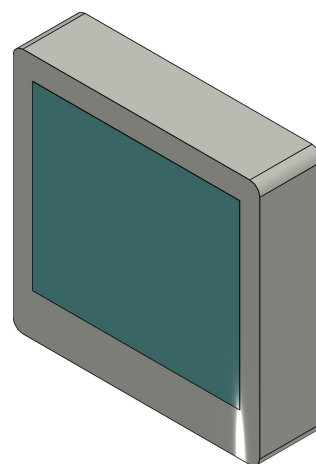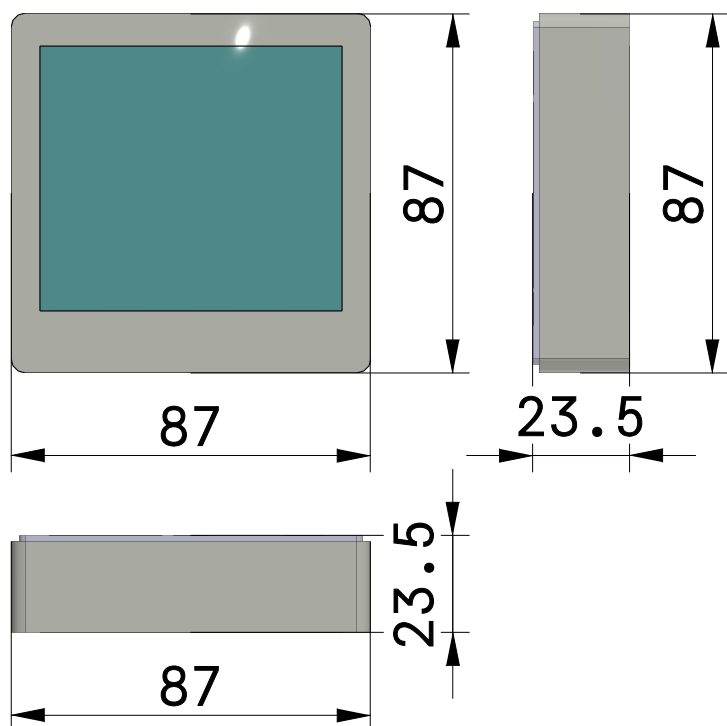

Bill-Of-Materials

N°	Designación	Cantidad
1.1	P-22RTM-1900D-1	1



3Dfindit

powered by  **CADENAS**



BELIMO

**Unidad de funcionamiento de
ambiente**

CO₂/humedad/temperatura

Technical drawings



3Dfindit

powered by  CADENAS



BELIMO

Unidad de funcionamiento de ambiente

CO₂/humedad/temperatura

Technical data

SA010ID04 (Manufacturer name)	Belimo
SA810ID03 (Order number / Reference number)	P-22RTM-1900D-1
PREVIEW (Preview)	../png/pic_eu_p-22rtm-1_d_4c-product_retina.png
LODLEVEL ()	High
SA810ID10 (Description text)	Unidad de funcionamiento de ambiente CO ₂ /humedad/temperatura activo, NFC, 0...5 V, 0...10 V, 2...10 V, MP-Bus, Visor táctil ePaper y LED, PC, blanco, RAL 9003



Unidad de funcionamiento de ambiente

CO₂/humedad/temperatura

E-Learning

Discover free training for 3Dfindit, the search engine for engineers, designers, and architects. Our 30 to 50-minute interactive courses provide you with comprehensive knowledge about the platform. Upon successful completion, you will receive a certificate. Start your first course now and master 3Dfindit!

**Become an Expert of
Digital Engineering**



3Dfindit

**Boost your career
and get ready
for Industry 4.0!**

[Learn more](#)

[Start course](#)