
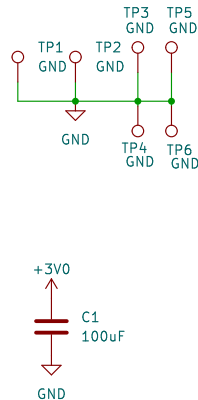



Cable-Monitor

A Project by A.Horvat and T.Wey


for PM3 Module ZHAW

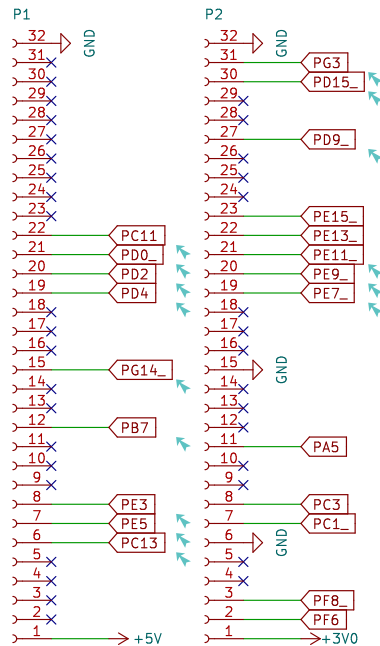


Pads for picking up Electrical Field. Including Filtering and amplifying

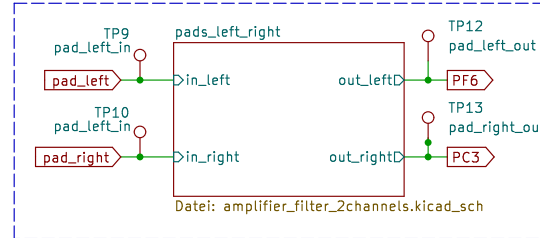


Hall-Sensor to detect Magnetic Fields (and allow us to calculate Current) includes filtering and amplifying

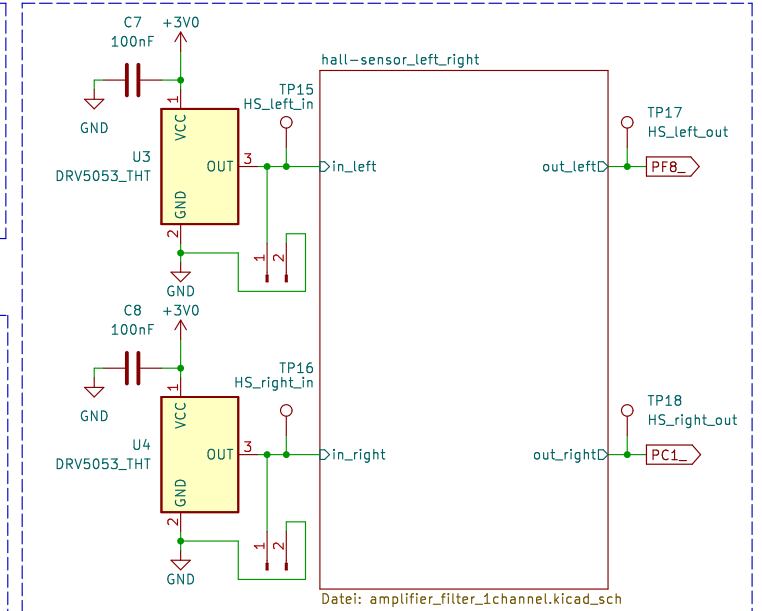




PWM controlled Buzzer




Logic for On/Off Switch (soft latching power circuit)

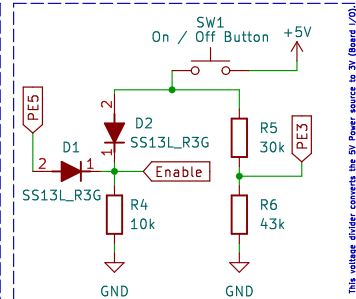

Load switch Can be used to power on with pushbutton and power off via microcontroller.

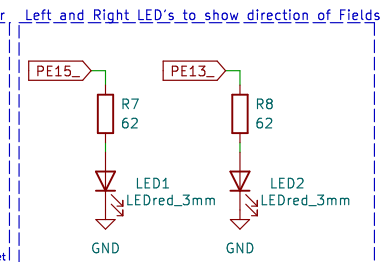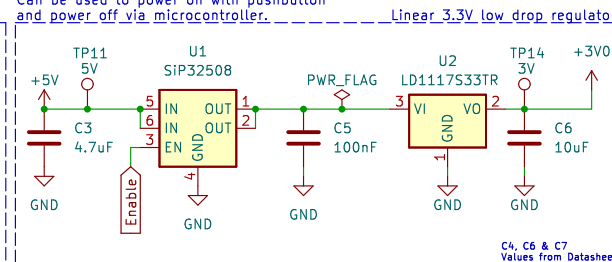

Micro USB Connector for 5V external supply (Powerbank).



GPIOs with names ending by a _ might be used for board peripherals. Check their availability.

The outline of the extension connectors of the microcontroller board with a list of the available connectors and peripherals on each pin is in Microcontroller_STM32F429/Datasheets/Extension_Connectors.xlsx

Recommended use of ADC inputs for ET.PM3:

PF6 = ADC3_IN4 = PAD_LEFT
PC3 = ADC3_IN13 = PAD_RIGHT
PF8 = ADC3_IN6 = COIL_LEFT
PC1 = ADC3_IN11 = COIL_RIGHT
PA5 = ADC12_IN5 (= DAC_OUT2) if additional PAD or COIL

DAC output controls VCO input for ET.PM4
PA5 = ADC12_IN5 = DAC_OUT2

This is the Hardware Schematic of the Cable Monitor PCB which was designed for ET.PM3
Created by: horvaale & weytim01

ZHAW

Sheet: /
File: Cable_Monitor.kicad_sch

Title: Cable Monitor



Size: A4 Date: 2023-09-29

KiCad E.D.A. kicad 7.0.7

Rev: V.1.0

Id: 1/3

Filtering and Amplification to measure Electric Fields.
 This will allow us to measure Fields generated by Cables and thus allow us to calculate the distance from an AC Voltage source.

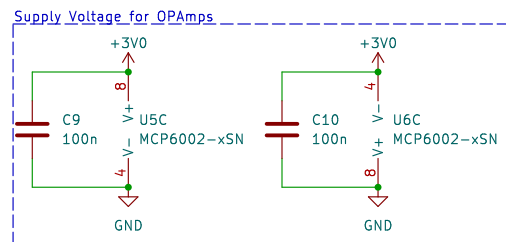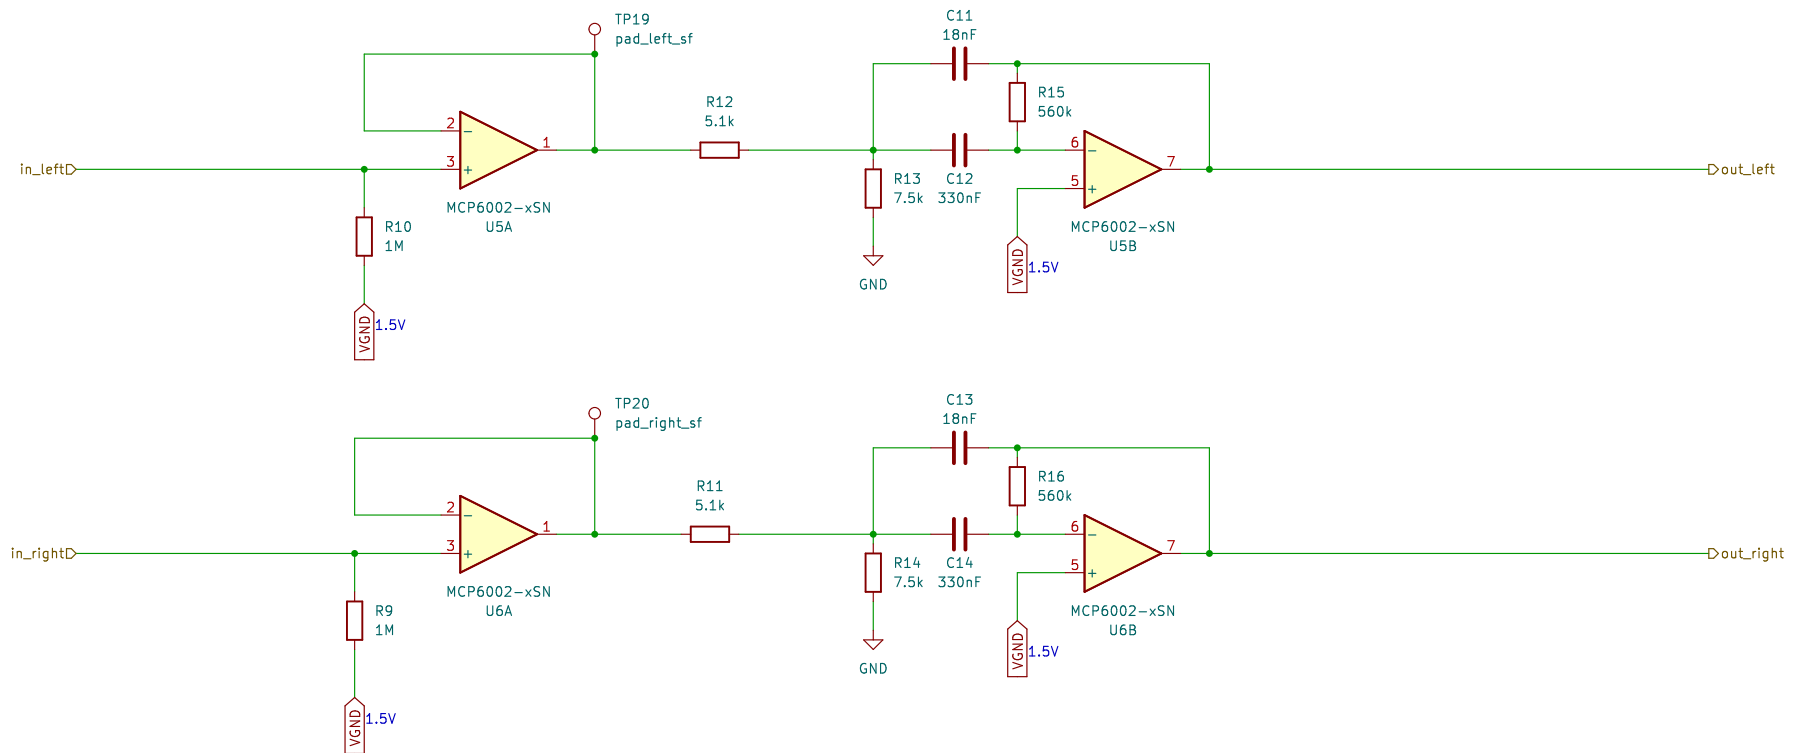

Pads for measuring electric fields (voltage)
 Created by: horvaale & weytim01

ZHAW

Sheet: /pads_left_right/
 File: amplifier_filter_2channels.kicad_sch

Title: Amplifiers and Filters for Pads


Size: A4 Date: 2022-12-22

KiCad E.D.A. kicad 7.0.7


Rev: V.1.0

Id: 2/3

Filtering and Amplification used for Hall-Sensors.
The Hall-Sensors will be used to measure a magnetic Field and thus allow us to calculate a current.

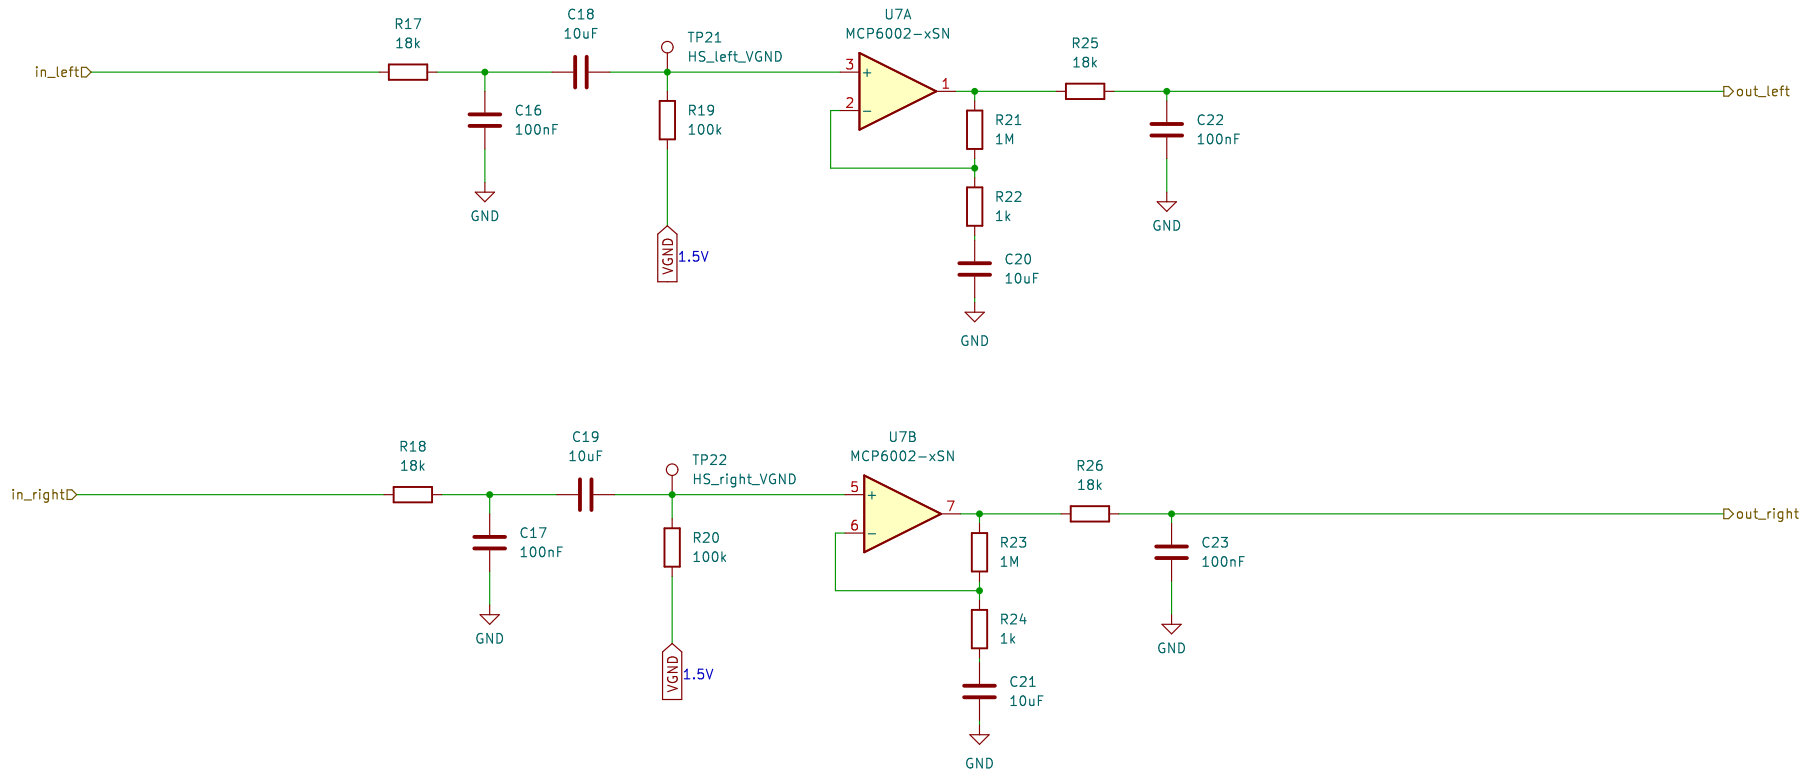

Supply Voltage for OP-Amp



Hall-Sensor's used to measure magnetic Field (current)

Created by: horvaale & weytim01

ZHAW

Sheet: /hall-sensor_left_right/

File: amplifier_filter_1channel.kicad_sch

Title: Amplifiers and Filters for Hall-Sensor

Size: A4 Date: 2022-12-22

KiCad E.D.A. kicad 7.0.7

Rev: V.1.0

Id: 3/3