Cable–Monitor
A Project by A.Horvat and T.Wey
for PM3 Module ZHAW

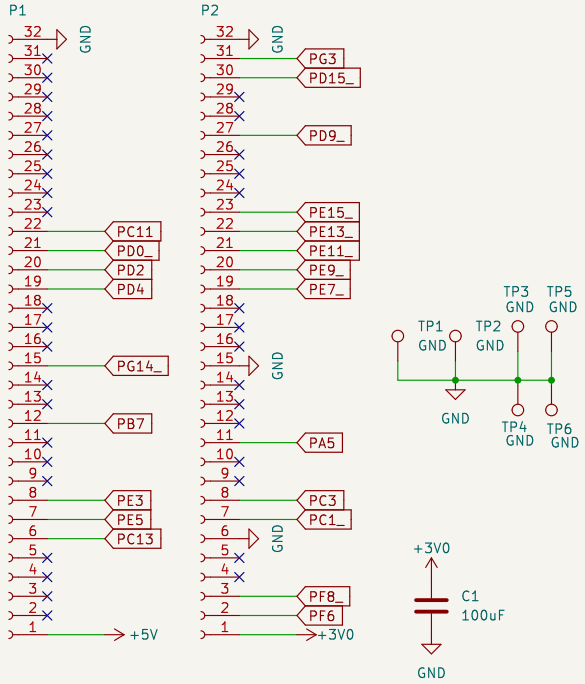

GPIOs with names ending by a _ might be used
for board peripherals. Check their availability.

The outline of the extension connectors of the microcontroller board
with a list of the available functions and peripherals on each pin is in
Microcontroller_STM32F429/Datasheets/Extension_Connectors.xlsx

Recommended use of ADC inputs for ET.PM3:
PF6 = ADC3_IN4 = PAD_LEFT
PC3 = ADC123_IN13 = PAD_RIGHT
PF8 = ADC3_IN6 = COIL_LEFT
PC1 = ADC123_IN11 = COIL_RIGHT
PA5 = ADC12_IN5 (= DAC_OUT2) if additional PAD or COIL

DAC output controls VCO input for ET.PM4
PA5 = ADC12_IN5 = DAC_OUT2

Pads for picking up Electrical Field. Including Filtering and amplifying

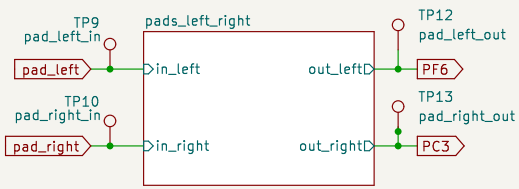

Hall–Sensor to detect Magnetic Fields (and allow us to calculate Current)
includes filtering and amplifying

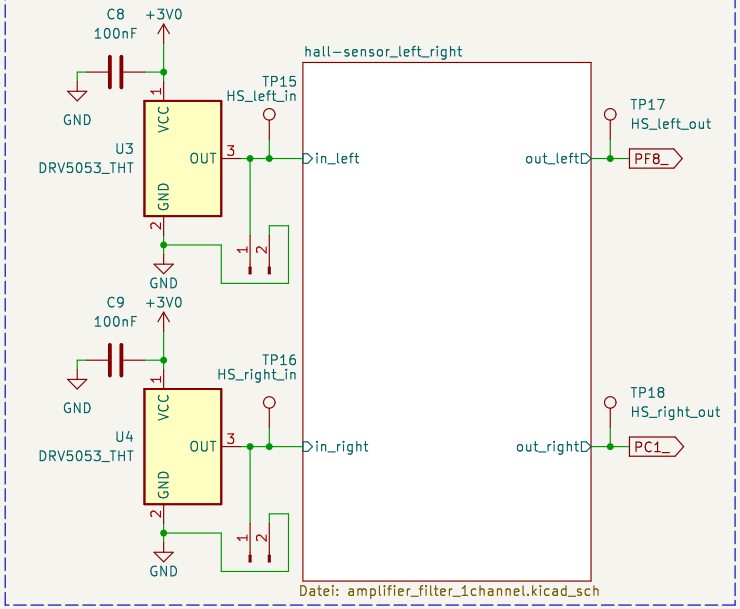

PWM controlled Buzzer



Logic for On/Off Switch
(soft latching power circuit)

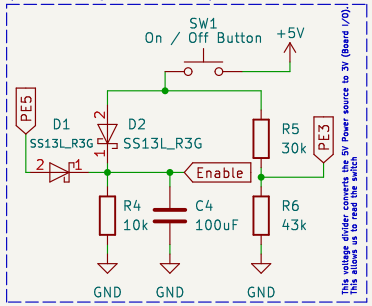

Virtual Ground



Load switch
Can be used to power on with pushbutton
and power off via microcontroller.

Linear 3.3V low drop regulator

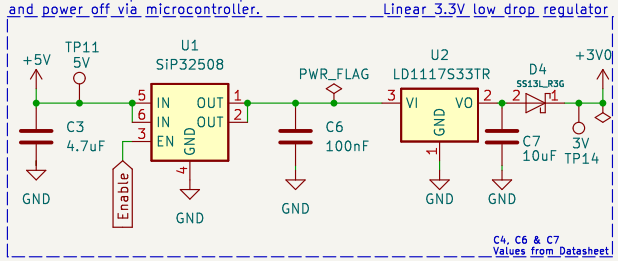

Left and Right LED's to show direction of Fields



Micro USB Connector for
5V external supply (Powerbank)



This is the Hardware Schematic of the Cable Monitor PCB which was designed for ET.PM3
Created by: horvaale & weytim01
ZHAW

Sheet: /
File: Cable_Monitor.kicad_sch

Title: Cable Monitor

Size: A4	Date: 2023–09–29	**Rev: V.1.0**
KiCad E.D.A. kicad 7.0.7		Id: 1/3

Filtering and Amplification to measure Electric Fields.
This will allow us to measure Fields generated by Cables and thus allow us to calculate the distance from an AC Voltage source.

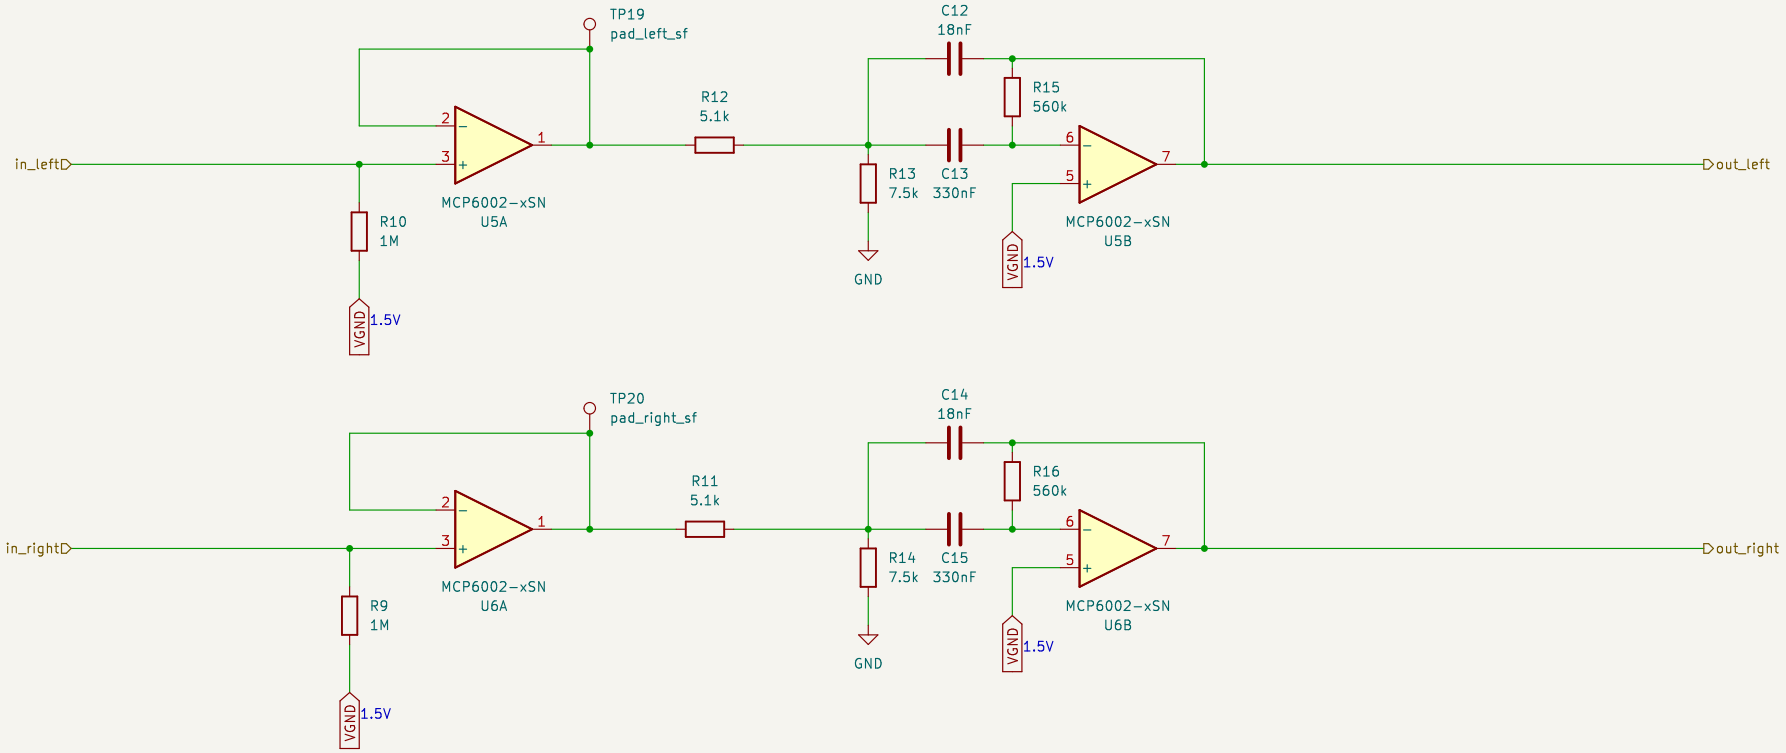

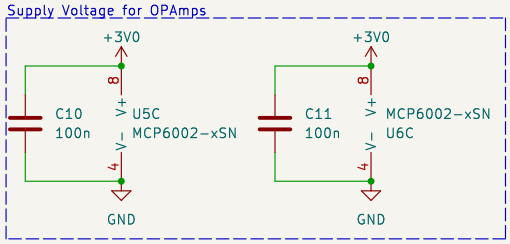

Pads for measuring electric fields (voltage)
Created by: horvaale & weytim01
ZHAW

Sheet: /pads_left_right/
File: amplifier_filter_2channels.kicad_sch

Title: Amplifiers and Filters for Pads

Size: A4	Date: 2022-12-22	**Rev: V.1.0**
KiCad E.D.A. kicad 7.0.7		Id: 2/3

Filtering and Amplification used for Hall-Sensors.
The Hall-Sensors will be used to measure a magnetic Field and thus allow us to calculate a current.

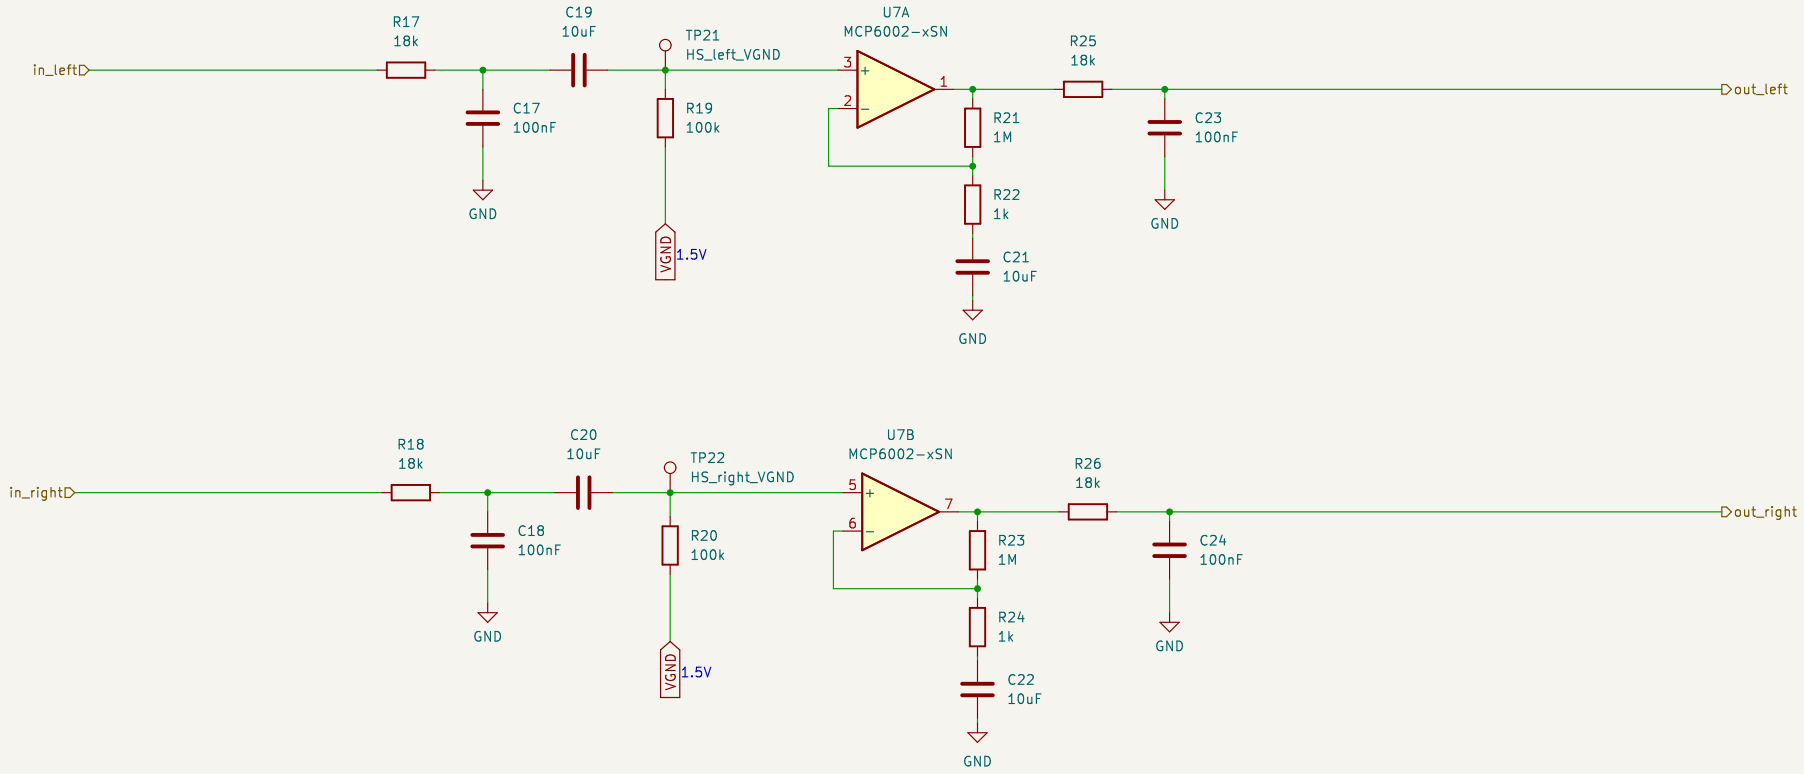

Supply Voltage for OP-Amp



Hall-Sensor's used to measure magnetic Field (current)
Created by: horvaale & weytim01
ZHAW

Sheet: /hall-sensor_left_right/
File: amplifier_filter_1channel.kicad_sch

Title: Amplifiers and Filters for Hall-Sensor

Size: A4	Date: 2022-12-22	**Rev: V.1.0**
KiCad E.D.A. kicad 7.0.7		Id: 3/3