M-09 CLOSE-REFLECTOR CLEARANCE

TAPE MEASURE SATELLITE YAGI | TM-YAGI-01

DRAWING REV A

FOR REVIEW - SOURCE O3-O6 REV L

VIEW A | REFLECTOR STATION ORDER

RELATIVE X INTERVAL 4:1; BOOMS TRUNCATED

BOTH FRONT END FACES FLUSH; MEASURE STATIONS INDEPENDENTLY FROM EACH BOOM'S FRONT.

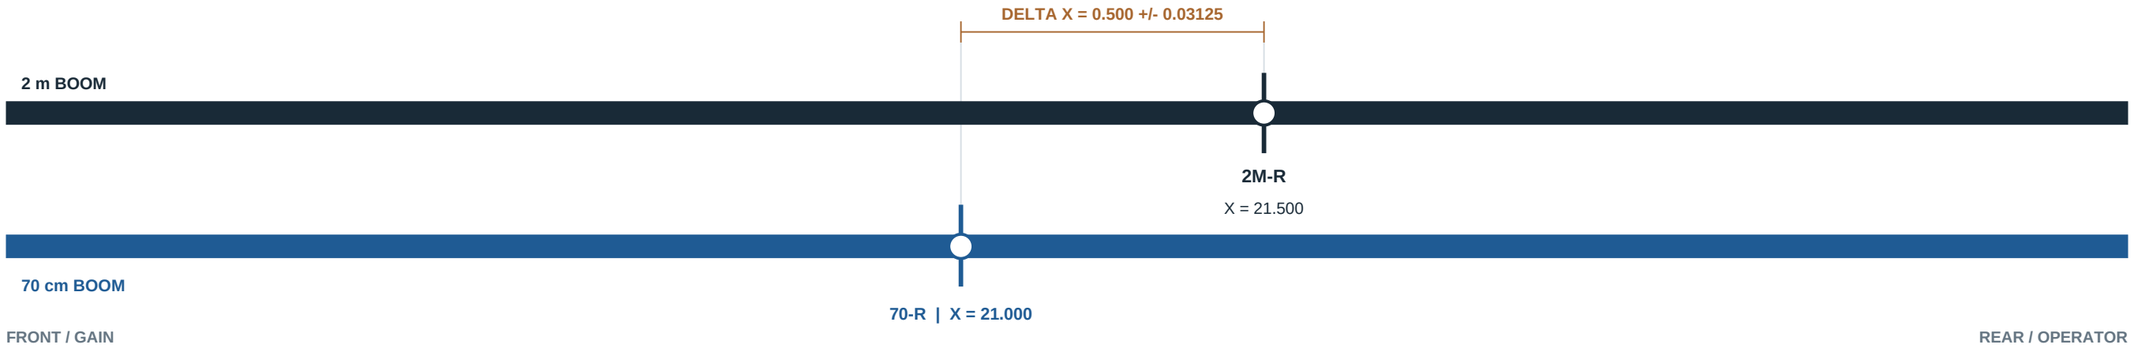

70-R IS 0.500 IN NOMINALLY FORWARD OF 2M-R. STATION MARKS DO NOT SHOW TAPE WIDTH OR EDGE GAP.

VIEW B | PLANE ORIENTATION REFERENCE

END PROJECTION / NTS

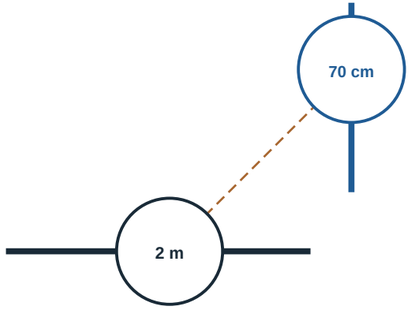

STATIONS OVERLAID; NOT ONE PHYSICAL CROSS-SECTION.

ELEMENT PLANES: 90 +/- 2 DEG

BOOM-CENTER LINE: 45 +/- 5 DEG TO EACH

BOOMS PARALLEL; FRONT FACES FLUSH

TAPE / SUPPORT SHAPES TRUNCATED

THIS PROJECTION CANNOT PROVE EDGE GAP

ACTUAL REFLECTORS ARE AT DIFFERENT X STATIONS; INSPECT THE BUILT 3D ASSEMBLY.

DETAIL C | NEAREST CONDUCTIVE EDGES

SCHEMATIC / NTS

MEASURE THE ACTUAL CLOSEST TAPE-EDGE APPROACH.



CHECK AFTER FINAL M-08 BOOM RETENTION.

INCLUDE ACTUAL BLADE WIDTH, CURVE, AND MOUNT ANGLE.

CENTER DELTA OR PAD GAP CANNOT SUBSTITUTE FOR THIS.

MEASURE / RECORD BOTH ACCEPTANCE CHECKS

O5 SEC. 13.2 / 15.1

FEATURE	LIMIT (IN)	ACTUAL
2M-R FRONT X	21.500 +/- 0.0625	
70-R FRONT X	21.000 +/- 0.03125	
DELTA X = X(2M-R) - X(70-R)	**0.500 +/- 0.03125**	
MIN PHYSICAL EDGE GAP	**>= 0.0625**	

INSPECTION / STOP RULE

O6 STEP 14

1. ALIGN FRONTS; PARALLEL BOOMS; REAR OFFSET <= 0.03125.
2. READ EACH FRONT X; REAR CHECK |XF+XR-L| <= 0.03125.
3. COMPUTE DELTA X; BOTH STATION LIMITS ALSO APPLY.
4. **GAUGE / RECORD THE CLOSEST ACTUAL EDGE GAP.**
5. **FAIL? STOP / DOCUMENT; ENGINEERING REVIEW.**
6. **NO BEND / NOTCH / OFFSET / SHORTEN WITHOUT REVISION.**

GENERAL NOTES

1. ALL DIMENSIONS IN INCHES. ONLY VIEW A RELATIVE X INTERVAL IS 4:1; REST NTS.
2. 2M-R: 41.400 CUT + ST-3; 70-R: 12.900 TAPE ONLY. SEE M-04 / M-05.
3. ALSO REQUIRE >= 0.125 CLEARANCE FROM EITHER BOOM TO OTHER-BOOM COMPONENTS.

SOURCE BASELINE

O3/O4/O5/O6 REV L

COMMIT 186c773

SCALE AT 100% PRINT

DELTA X 4:1 ONLY

OTHER DETAILS NTS

ISSUE / DATE

REV A - FOR REVIEW

2026-10-12

SHEET M-09