E-02 2 m HAIRPIN DETAIL

TAPE MEASURE SATELLITE YAGI | TM-YAGI-01

DRAWING REV A

FOR REVIEW - SOURCE O3-O6 REV L

VIEW A | CUT THE INITIAL BLANK

BLANK CENTERLINE LENGTH 1:1 AT 100% PRINT

2M-HP | FULLY BARE #12 AWG SOLID COPPER; STRIP WITHOUT NICKING.

O7 CUT / LABEL / RECORD. THIS IS STOCK LENGTH, NOT THE FINISHED LEG LENGTH OR AN RF MATCH SETTING.

VIEW B | SYMMETRIC U STARTING SHAPE

AS FORMED / NTS

TOP VIEW IN THE 2 m ELEMENT PLANE; SHAPE FROM THE ACTUAL FEED HARDWARE.

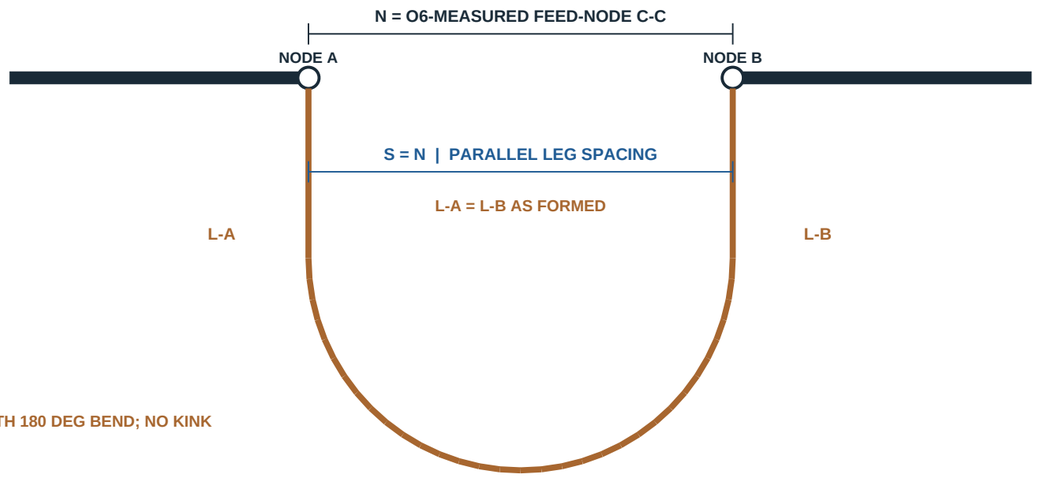

ONE SMOOTH 180 DEG BEND; NO KINK

MEASURE BEND DIA AS FORMED; DO NOT DERIVE THE FINISHED SHAPE FROM 8.500.

VIEW C | INSTALLED ORIENTATION

CONCEPT / NTS

U EXTENDS AWAY FROM THE 70 cm BOOM AND REAR COAX ROUTE.

70 cm BOOM / REAR COAX KEEP-OUT REFERENCE

POSITION IS SCHEMATIC; VERIFY ON THE BUILT ANTENNA

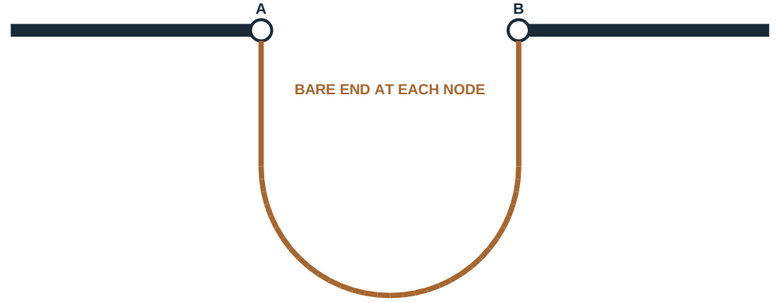

CHECK >= 0.500 IN TO UNINTENDED CONDUCTORS

WHERE ACTUAL ASSEMBLY PERMITS; RECORD ACTUAL GAP.

O7 STARTING-GEOMETRY RECORD

TRANSFER TO O5 SEC. 15.2

FEATURE	CONTROL / TARGET	ACTUAL / PASS
BLANK BEFORE FORMING	8.500 IN INITIAL	
FEED NODE C-C N / LEG SPACING S	MEASURE N; SET S = N	
STRAIGHT LEGS L-A / L-B	EQUAL AS FORMED	
BOTTOM BEND DIA / ORIENTATION	SMOOTH 180; AWAY	
MIN UNINTENDED-CONDUCTOR GAP	>= 0.500 WHERE PERMITTED	

O8 TUNING / ELECTRICAL HOLD

SEPARATE AS-TUNED RECORD

DO NOT TRIM BEFORE INITIAL CALIBRATED O8 MEASUREMENT.

IF TRIMMED: RECORD EQUAL TRIM AT BOTH ENDS AND FINAL SHAPE.

ONE HAIRPIN END FREE: 2 m BNC PIN-TO-SHELL OPEN.

BOTH ENDS SECURED: CONTINUITY THROUGH HAIRPIN.

RECHECK GAP / ROUTING / DC AFTER EACH CHANGE.

GENERAL NOTES

1. DIMENSIONS IN INCHES. VIEW A CUT LENGTH IS 1:1 AT 100% PRINT; VIEWS B / C ARE NTS.
2. EACH END HOOK IS HELD AT ITS OWN M-07 FEED NODE; USE APPROVED #6-32 STACK.
3. MATCH REQUIRES O8 IMPEDANCE / SWR DATA; 8.500 IN ALONE DOES NOT SET REACTANCE.

SOURCE BASELINE

O3/O4/O5/O6 REV L

COMMIT 186c773

SCALE AT 100% PRINT

BLANK 1:1 ONLY

OTHER DETAILS NTS

ISSUE / DATE

REV A - FOR REVIEW

2026-10-12

SHEET E-02