

Misaka: Versatile swarm robotics platform for swarm user interface development

ABSTRACT

This paper introduces a versatile swarm robotics platform for distributed algorithm visualization, also an extendable open-source open-hardware platform for developing tabletop tangible swarm interfaces. We provide two different version of Misaka: the commercial version and the explorer version. The commercial version is Swarm robots for distributed algorithm development, while the explorer version ,which is an open-source PCB, gives users more freedom to develop their own swarm interface for specific purposes. Bluetooth 5.1 provide us with high-bandwidth communication, as well as a new method of positioning Misaka. We will integrates it into Misaka when we get the commercial model.

CCS CONCEPTS

- Human-centered computing → Systems and tools for interaction design;
- Hardware → PCB design and layout.

KEYWORDS

Swarm, tangible interface, hardware platform, Human-Robot Interaction

ACM Reference Format:

. 2020. Misaka: Versatile swarm robotics platform for swarm user interface development. In *Woodstock '18: ACM Symposium on Neural Gaze Detection, June 03–05, 2018, Woodstock, NY*. ACM, New York, NY, USA, 5 pages. <https://doi.org/10.1145/1122445.1122456>

1 INTRODUCTION

The name of our platform, Misaka, comes from "Misaka Network" in the light novel, manga and anime series, A Certain Magical Index, and its side-story mangas and anime series, A Certain Scientific Railgun and A Certain Scientific Accelerator. The Misaka Network is a brainwave network formed between the Sisters. The Sisters are Mikoto Misaka's 20,000 clones, who can share their thoughts and memories within their communication network. Misaka Network is actually a strongly-connected distributed network. One of our platform's typical applications is verifying distributed algorithms in a decentralized network, so we choose Misaka to be our product's name.

We design two different version of Misaka: the commercial version and the explorer version.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

Woodstock '18, June 03–05, 2018, Woodstock, NY

© 2020 Association for Computing Machinery.

ACM ISBN 978-1-4503-XXXX-X/18/06...\$15.00

<https://doi.org/10.1145/1122445.1122456>

The commercial version is Swarm robots, equiped with omni-wheels and stepper motors, and can move holonomicly and precisely. Distributed algorithms researchers can utilize it as a fully decentralized hardware platform to test newly raised algorithms, also a visualization platform of all kinds of consensus algorithms. Furthermore, teachers can use it as great tool to visualize dynamic multiple scatterplots, and to explain theories to their students.

The explorer version is for those researchers who want to develop tabletop swarm robots of their own. This version is a single PCB, which integrates almost all functionalities needed to develop any kinds of swarm interfaces of many purpose.

Both version have the ability of adding suitable extensions on it. We also provide models adding function to it, such as computer vision, wifi, machine learning algorithms, etc.

2 BACKGROUD

3 RELATED WORK

4 INTERACTION DESIGN

4.1 Distributed algorithms test and visualization

Most of the newly proposed algorithms are verified in a pure software environment of a single device, without considering the communication delays in the actual hardware environment, inconsistent data packet switching order, and poor individual channels. Our platform uses The ZigBee chip widely used in the urban power Internet of Things system is also compatible with Mesh networking, achieving complete decentralization of software and hardware, and can well simulate the hardware communication environment.

Distributed algorithm verification is mostly carried out in a pure software environment of a single device, such as Matlab simulation, which lacks a general hardware platform to test the feasibility of these algorithms in actual communication scenarios.

This platform makes a completely decentralized test environment possible. At the same time, since this is a convenient visual development tool, it also makes interactive code writing/testing/display possible.

Distributed algorithm developers can use our strictly decentralized platform to test the feasibility of the hardware and get an interactive code writing, testing and display experience.

4.2 Teaching application

Some algorithms/subject concepts are difficult to understand, so you can use cluster interaction to do interactive and interesting teaching. For example, a cluster system can be used to describe a scatter plot with multi-dimensional variables, etc.

5

6 HARDWARE DESIGN

To make our hardware more universal, we design two different version of Misaka: the commercial version and the explorer version.

6.1 Commercial version

The commercial version aims at HRI applications, as well as algorithms development and visualization scenarios. It is small custom-made robot as shown in Figfig:CommercialVersion.

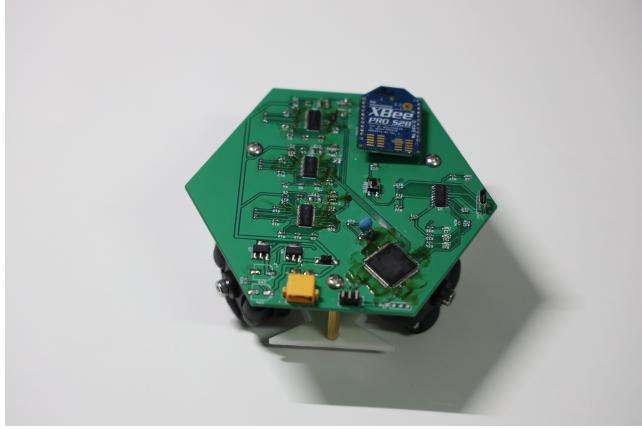


Figure 1: The commercial version

The commercial version consists of a 3D printed frame, custom designed PCB, battery, omni-directional wheels and micro stepper motors.

The frame is printed using PLA(Polylactic Acid). It is carefully designed to fit the motors, wheels, and the PCB. The 3D Model of it is shown in Fig 2, and the CAD detail is shown in Fig 3.

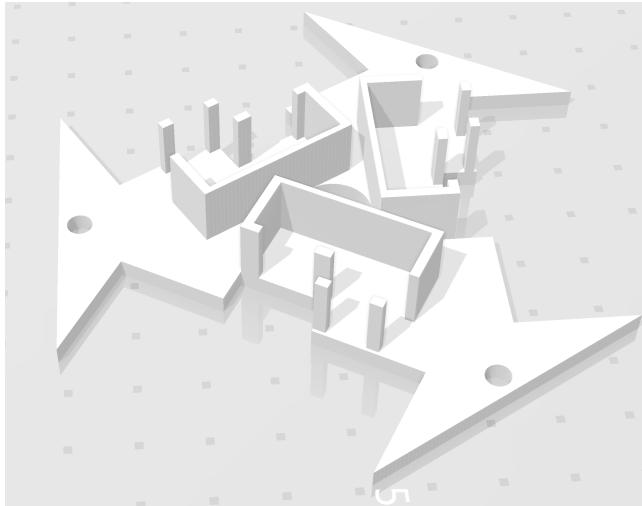


Figure 2: 3D Model of the Frame

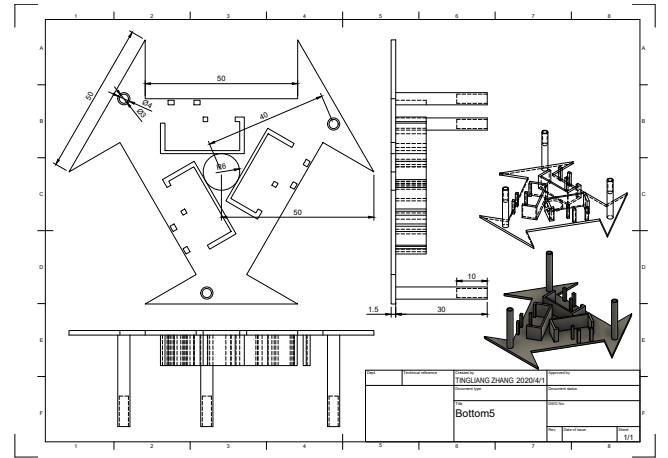


Figure 3: the CAD of the Frame

Its dimensions are 100 mm in diameter and 50 mm in height. Each robot is powered by a 450mAh 2S 7.4V LiPo battery. Most of the power in the robots are consumed by the motors. The current draw of each robot is approximately 100 mA when the motors are stalled and 800 mA during typical use. Thus, with a 450 mAh battery, robots are capable of moving for half an hour, and can work even longer with BLE(Bluetooth Low Energy).

Three 38-mm-diameter omni-directional wheels are driven by micro stepper motors to precisely control the rotation angle of each wheel. To drive the robot, a motor driver chip (DRV8825) and three 2-phase 4-wire Stepper Gear Motor are used. With this combination, the robot has a maximum speed of approximately 20 cm/s. The holonomic system allows the robots to move precisely and can easily respond to user interaction. The shape of holonomic chassis is shown in Fig 4, and the real picture of it is shown in Fig 5.



Figure 4: Chassis render

The commercial version main circuit board is shown in Fig 6. The main processors onboard is a AVR microcontrollers(Microchip

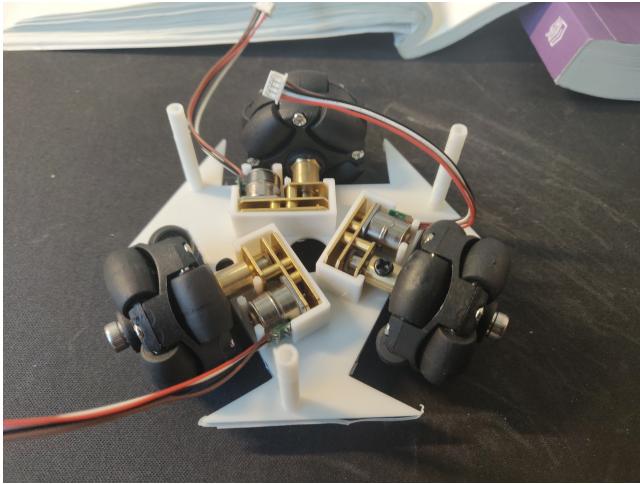


Figure 5: The holonomic chassis

ATmega2560-16AU) that combines 86 general purpose I/O lines, 32 general purpose working registers, PWM, 4 USARTs, 16-channel 10-bit A/D converter, and a JTAG interface for on-chip debugging. ATmega2560 manages most logic computation.

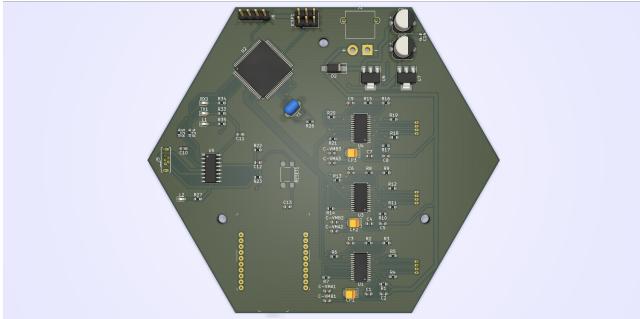


Figure 6: The commercial version PCB

Eight independently WS2812B LED on PCB illuminated in full RGB using are wrapped inside the 3D printed enclosure to provide the robot's state display as well as full color indicating, shown in Fig 7.

Now robots communicates with each other using Digi XBee module. XBee supports mesh networking which can be decentralized. We can use this feature to develop and test distributed algorithms which are also decentralized.

Users can modify the robot for their applications by designing custom modules that attach to its core module or adding powerful chips and development boards to achieve more functions, such as computer vision, wifi, machine learning algorithms, etc. Currently its compatible extensions are shown in Fig 8. For example, in order to give Misaka Linux development environment and capabilities of testing machine learning algorithms, we add Nvidia Jetson Nano to Misaka core through UART for high-level control and image processing. And to connect them with bluetooth and wifi, we add



Figure 7: The RGB LED

ESP32 modules which also interact with Misaka through serial communication.[3]



Figure 8: Currently compatible extensions

6.2 Explorer version

For those researchers who want to develop distributed algorithms or tabletop swarm robots of their own, we provide an open-source PCB.

It supports four kinds of different communication protocols, and integrates easy-to-use programmer and debug connector. To drive the stepper motor and DC motor, we have Powerstep01 on board with necessary components. To extend its function, we provide a universal interface which can communicate with other development board such as Nvidia Jetson NANO.

All functionalities on board is shown below:

- Mega2560-16AU main MCU
- ATMega16U2 USB-UART
- USB Type C port
- PowerStep stepper motor and DC motor drive
- 9 x WS2812B RGB-LED full-color light display
- Downward looking infrared camera with dot paper for positioning
- XBee3, the main Mesh network communication

- Espressif ESP32, provides WiFi 5, Bluetooth, BLE communication
- CP2102. We can burn programs through USB Type C port
- External battery power supply
- USB port power supply
- Buck DC-DC and impulse back pressure overvoltage and overcurrent protection
- Programmable pins for testing
- Support UART, I2C, SPI communication protocol expansion interface

The PCB 3D model is shown in Fig 9, After SMT, the PCB is shown in Fig 10.

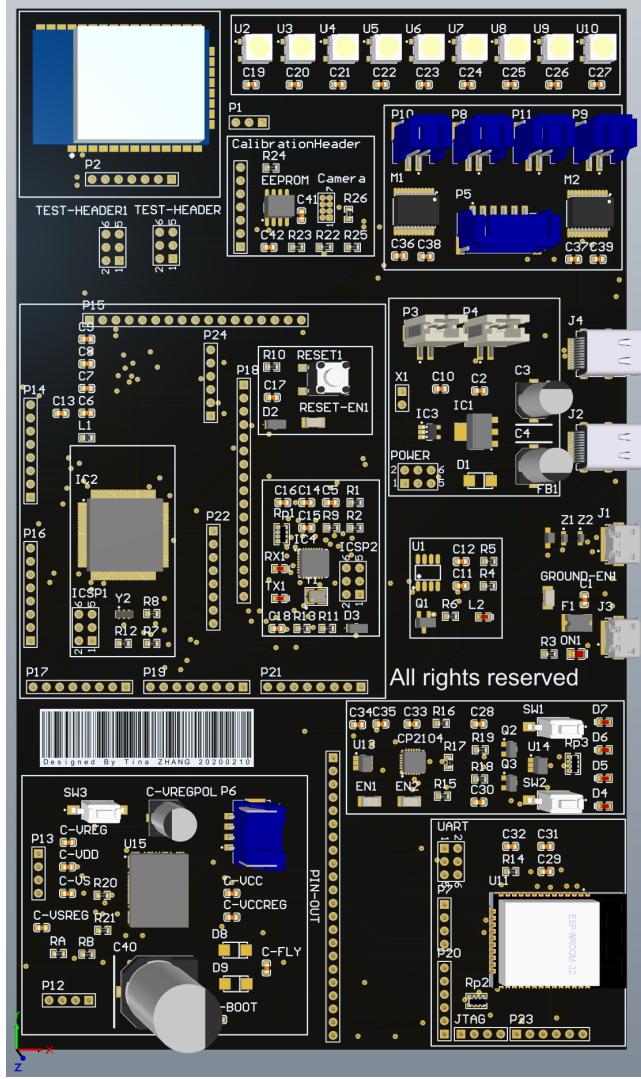


Figure 9: 3D model

7 FUTURE RTLS WITH BLUETOOTH 5.1

Real-time location systems (RTLS) are used to track and identify the location of objects in real time using "Nodes" or "tags" attached

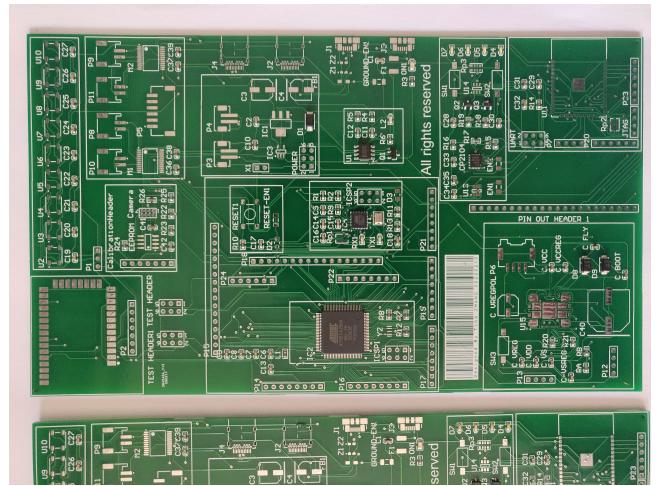


Figure 10: PCB after SMT

to, or embedded in, the objects tracked, and "Readers" that receive and process the wireless signals from these tags to determine their locations.[1]

The Bluetooth SIG presented Bluetooth 5.1 in January 2019. With Angle of Arrival (AoA) and Angle of Departure (AoD) which are used for location and tracking of devices, we can simply use BLE 5.1 as both communication and positioning methods.

Those techniques requires one of the two communicating devices to have an array of multiple antennae, with the antenna array included in the receiving device when the AoA method is used and in the transmitting device when using AoD, as shown in Fig 11.[2]

With Bluetooth 5.1, we are able to track Misaka with a small margin of location error, as low as 10cm. The accuracy will be enough for many swarm applications.

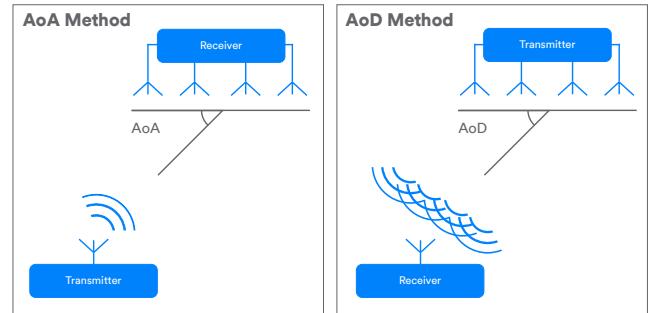


Figure 11: Angle of Arrival (AoA) and Angle of Departure (AoD)

8 CONCLUSION

We present Misaka, a versatile swarm robotics platform for swarm user interface development.

We hope that this paper and Misaka platform will spur more research and creativity in the swarm user interface.

All necessary material and documentation for implementing Misaka can be found at Github.

ACKNOWLEDGMENTS

To my girlfriend Yihan Jia, for help me during the research.

REFERENCES

- [1] HW costs Tags-low and Medium Medium High High. 2009. Real Time Location Systems. (2009).
- [2] Martin Woolley. 2019. Bluetooth Core Specification v5. Bluetooth.
- [3] Tingliang Zhang, Haiwang Zhong, Zhenfei Tan, and Xinfei Yan. 2020. Misaka: Interactive Swarm Testbed for Smart Grid Distributed Algorithm Test and Evaluation. In *2020 IEEE/IAS Industrial and Commercial Power System Asia (I&CPS Asia)*. IEEE, 1610–1615.