

Exercise 1(A) - Additional Task 2


Initial Setup	1
1. Mechanical System	1
2. Electrical System	2
3. Electromechanical System	3

Initial Setup

```
close all;  
clear;  
clc;
```

1. Mechanical System

```
F = str2double(inputdlg('Enter force value: ')); %500  
M = str2double(inputdlg('Enter mass value: ')); %1000  
B = str2double(inputdlg('Enter dashpot constant value: ')); %50  
K = str2double(inputdlg('Enter spring constant value: ')); %10  
  
s = tf('s');  
G = 1/((M*s^2)+(B*s)+K);  
System = F*G;  
  
figure('Name','Response of Mechanical System','NumberTitle','off');  
  
% Impulse response  
subplot(2,1,1);  
impz(System);  
title('Impulse Response of Mechanical System');  
xlabel('Time');  
ylabel('Displacement');  
  
% Step response  
subplot(2,1,2);  
step(System);  
title('Step Response of Mechanical System');  
xlabel('Time');  
ylabel('Displacement');
```

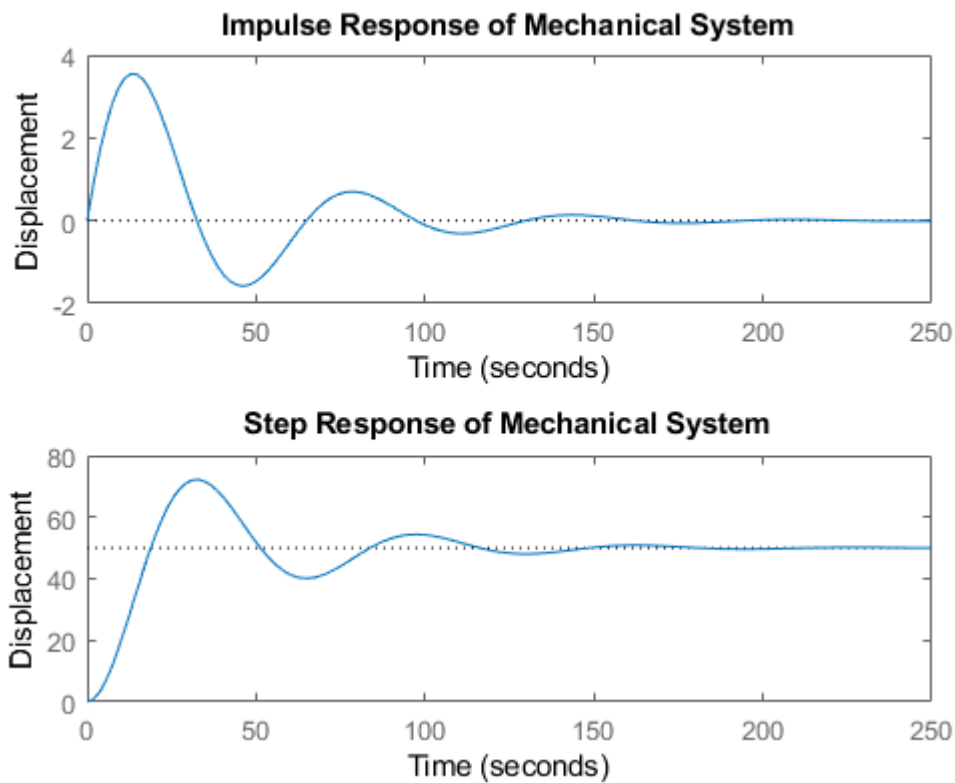

2. Electrical System


```
V = str2double(inputdlg('Enter voltage value: ')); %24
R = str2double(inputdlg('Enter resistance value: ')); %10e3
C = str2double(inputdlg('Enter capacitance value: ')); %100e-6

s = tf('s');
G = 1/(((R^2)*(C^2)*(s^2))+ (3*R*C*s)+1);
System = V*G;

figure('Name','Response of Electrical System','NumberTitle','off');

% Impulse response
subplot(2,1,1);
impz(System);
title('Impulse Response of Electrical System');
xlabel('Time');
ylabel('voltage');

% Step response
subplot(2,1,2);
step(System);
title('Step Response of Electrical System');
xlabel('Time');
ylabel('voltage');
```

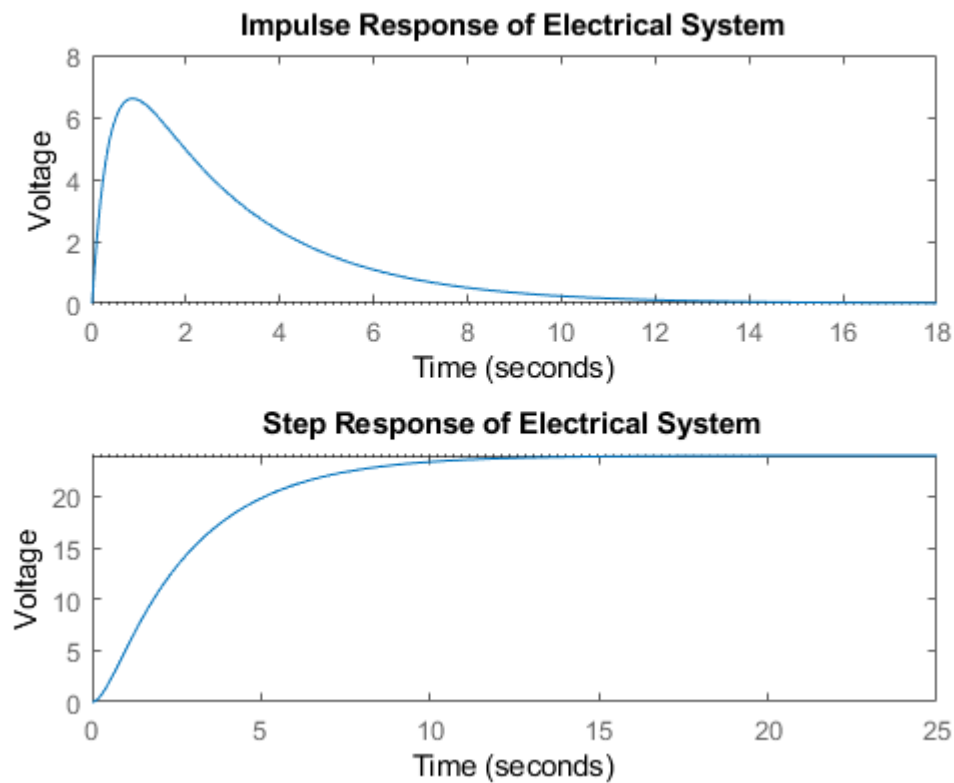

3. Electromechanical System

```

Va = str2double(inputdlg('Enter armature voltage value: ')); %24
Ra = str2double(inputdlg('Enter armature resistance value: ')); %5.5
La = str2double(inputdlg('Enter armature inductance value: ')); %1.5e-3
J = str2double(inputdlg('Enter inertia value: ')); %2.5e-4
B = str2double(inputdlg('Enter damping constant value: ')); %0.5
Kt = str2double(inputdlg('Enter torque constant value: ')); %2.5
Kb = str2double(inputdlg('Enter back e.m.f. constant value: ')); %1.5



s = tf('s');
G = Kt/(((Ra+(La*s))*((J*s^2)+(B*s)))+(Kt*Kb*s));
System = Va*G;

figure('Name','Response of Electromechanical System','NumberTitle','off');

% Impulse response
subplot(2,1,1);
impz(System);
title('Impulse Response of Electromechanical System');
xlabel('Time');
ylabel('Angular Displacement');

% Step response
subplot(2,1,2);
step(System);
title('Step Response of Electromechanical System');
xlabel('Time');
ylabel('Angular Displacement');

```

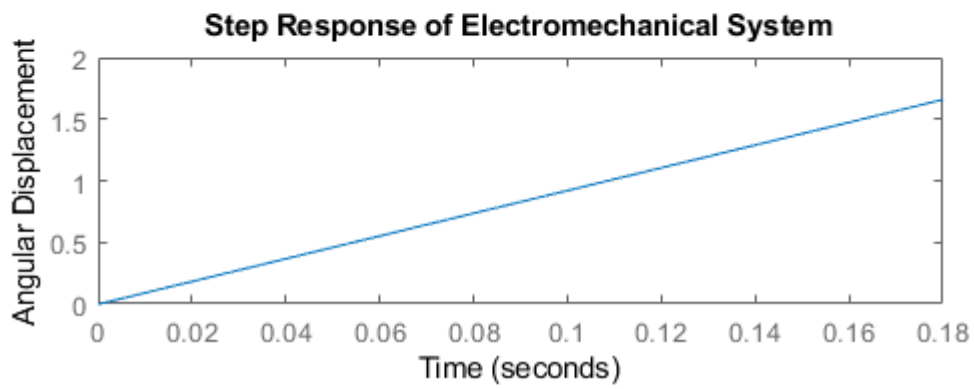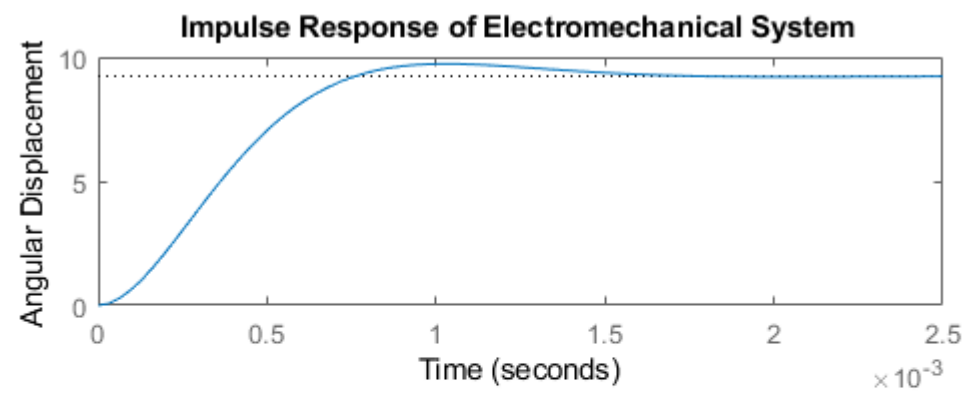

Published with MATLAB® R2018a