ディップスイッチ●Dip Swich

DIP SWITCH 1		1	2	3	4	5	6	7	8
COIN1	1COIN - 1PLAY	OFF	OFF						
	1COIN - 2PLAY	ON	OFF						
	1COIN - 3PLAY	OFF	ON						
	1COIN - 6PLAY	ON	ON						
COIN2	1COIN - 1PLAY	305	535-10	OFF	OFF				
	2COIN - 1PLAY			ON	OFF				
	1COIN - 2PLAY			OFF	ON				
	1COIN - 3PLAY			ON	ON				
ジャックの数 NUMBER OF JACK	3 JACKS					OFF	OFF		
	4 JACKS			100		ON	OFF		
	5 JACKS					OFF	ON		
	2 JACKS					ON	ON		
タイプ TYPE	テーブル COCKTAIL TABLE			200				OFF	
	アップライト UPRIGHT							ON	
アモンストレーション音 DEMON STRATION SOUND	音無 NON SOUND			02	7	1			OFF
	音有 SOUND		1 - 9						ON

DIP	SWI	TCH 2	1	2	3	4	5	6	7	8
難易度1 (メカニックバードのスピード) DIFFICULTY 1 (SPEED OF MECHANIC BIRD)	易	MODERATE				OFF	OFF			
	1	DIFFICULT				ON	OFF			
		MORE DIFFICULT				OFF	ON			
	難	TOP DIFFICULT				ON	ON			
能易度2 (単の数とスピード) DIFFICULTY 2 (ENEMIES' NUM- BERS AND SPEED)	易	EASY						ON	OFF	
		MODERATE						OFF	OFF	
		DIFFICULT						OFF	ON	
	雜	MORE DIFFICULT						ON	ON	
スペシャルコイン出現率 RATIO OF SPECIAL COIN APPEARANCE	易	EASY								OFF
	難	DIFFICULT		Mary						ON

- ※ディップSW2のSW1, SW2, SW3は末使用です。必ずOFFにして使用して下さい。
- SW 1, SW 2, SW 3 of Dip SW 2 are not used. Be sure to keep them in the OFF position when using.

エッジコネクタ●Edge Connector


SOLDER SIDE (ハンダ面)	NO	COMPONENT SIDE (部品面)
2P RIGHT	1	2P LEFT
2P UP	2	2P DOWN
2P JUMP	3	
	4	
1P RIGHT	5	1P LEFT
1P UP	6	1P DOWN
1P JUMP	7	
	8	
COIN SW1	9	COIN SW2
1P START	10	2P START
GND	11	GND
GND	12	GND
GND	13	GND
SPEAKER(+)	14	SPEAKER(-)
+12V	15	+12V
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	16	
+6V	17	+5V
+5V	18	+5V

CONNECTOR KEL-1150-036-009 (3.97mm PITCH)

●ジョイスティックレバー8方向

JOYSTICK LEVER . . . 8 directions

Jump Botton

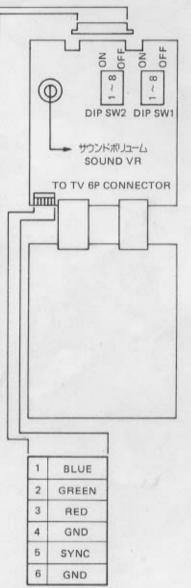

CONNECTOR-S6P-SHE-1 (2.5mm PITCH)

電源 POWER SOURCE

+ 5V 5A

+12V 1A

(AF Amp. BTL system)