
CoB DIP Breakout

DIP breakout for TinyTapeout GF180 ASICs

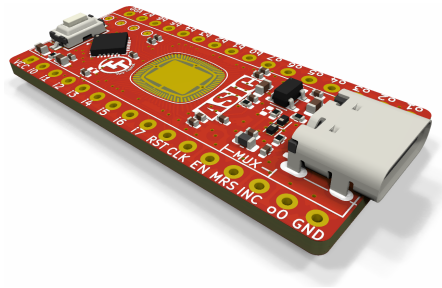

USB connector

Power and USB2

Options for basic filtering and ESD on USB conn. At a min, populate the ferrite and TVS diodes.

Core Voltage Selection

SRC select

VDDIO SUPPLY

AP2112K-3.3

Bulk/Bypass C

Bridge I/O and Core Supplies

Bridge Core and Analog Supplies

Supply chip with VUSB regulator output

This breakout allows direct access to the wire-bonded ASIC through the I/O, MUX and power pins.

When used in conjunction with the TT-DIP firmware, the system may be configured to automatically setup and clock specific designs on power-up, may do automatic detection of externally driven project MUX or clock/reset, and provides a Serial TUI interface through USB, for use by commander or directly through serial port.

See: https://github.com/psychogenic/TT-DIP

(C) 2026 Pat Deegan

Psychogenic Technologies

Sheet: /

File: breakout-dip-gf.kicad_sch

Title: CoB DIP Breakout

Size: A4	Date: 2026-10-23	**Rev: 1.0**
KiCad E.D.A. 10.0.7		Id: 1/1