


QFN and Analog Breakout For TinyTapeout IHP ASICs



This version of the breakout allows access to the ASIC I/O, management and analog interfaces. It is the first IHP chip breakout, and

- * it receives the DB 3v3 IO level as well as the VUSB and it takes on the responsibility of regulating its IO/Vcore voltages
- * provides interfaces to supply or monitor each VDD* and VAA independently
- * provides means to send off analog signals to demoboard, and its weak pull-downs, or severe that connection
- * is naturally keyed, owing to new bottom-side connectors
- * DF12 connectors have high speed capability (up to USB4/20Gbps), high density and, optionally, a shielded version for improved noise immunity.
- * has additional I/O from bottom-side for management, eeprom ID or expansion.

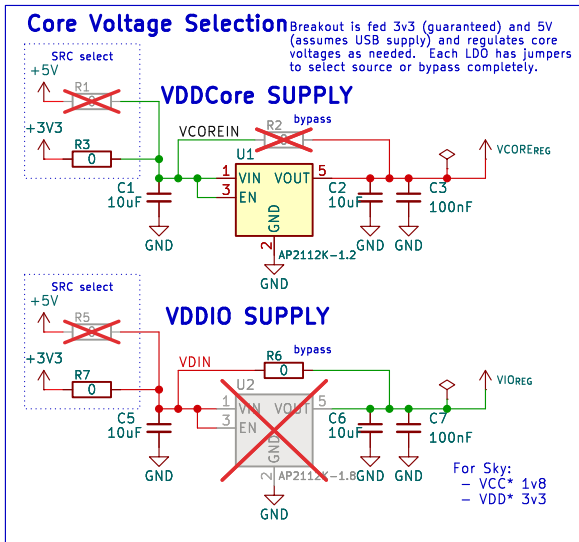