

Tiny Tapeout Demoboard v3

https://github.com/TinyTapeout/tt-demo-pcb





User Input + Config

Input DIP

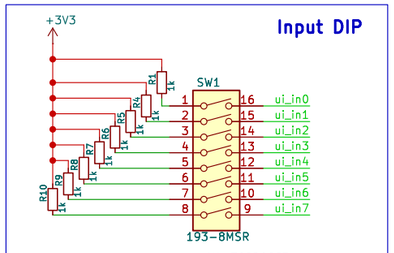


RP Boot Mode






Momentary Switches (debounced)

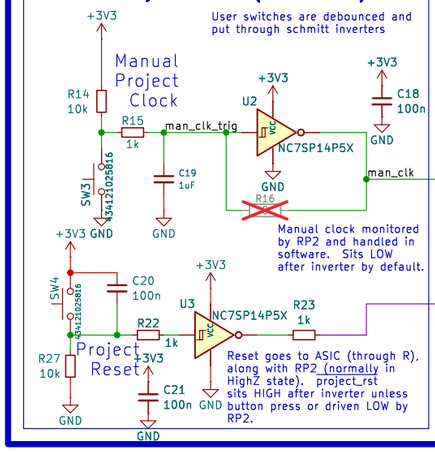


Power


USB connector

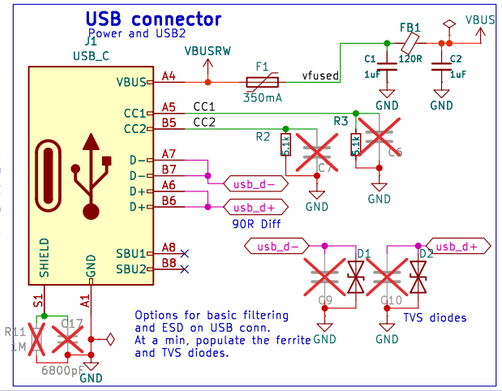

3V3 LDO

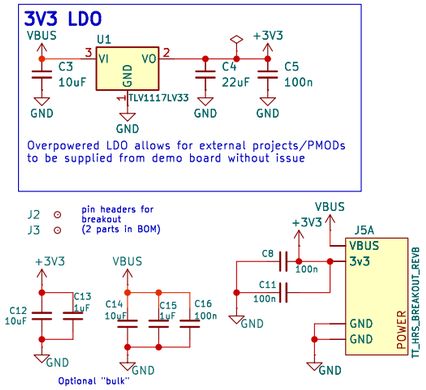


RP2350B

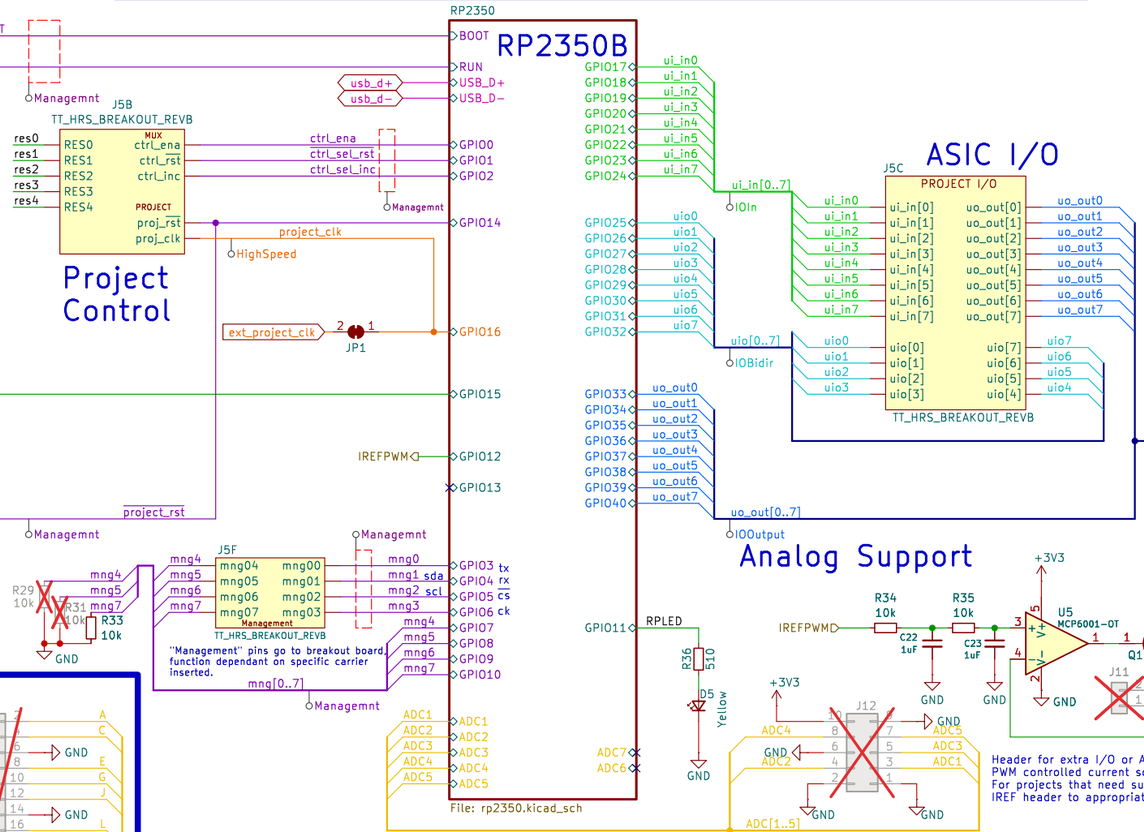


Project Control

ASIC I/O

Analog Support

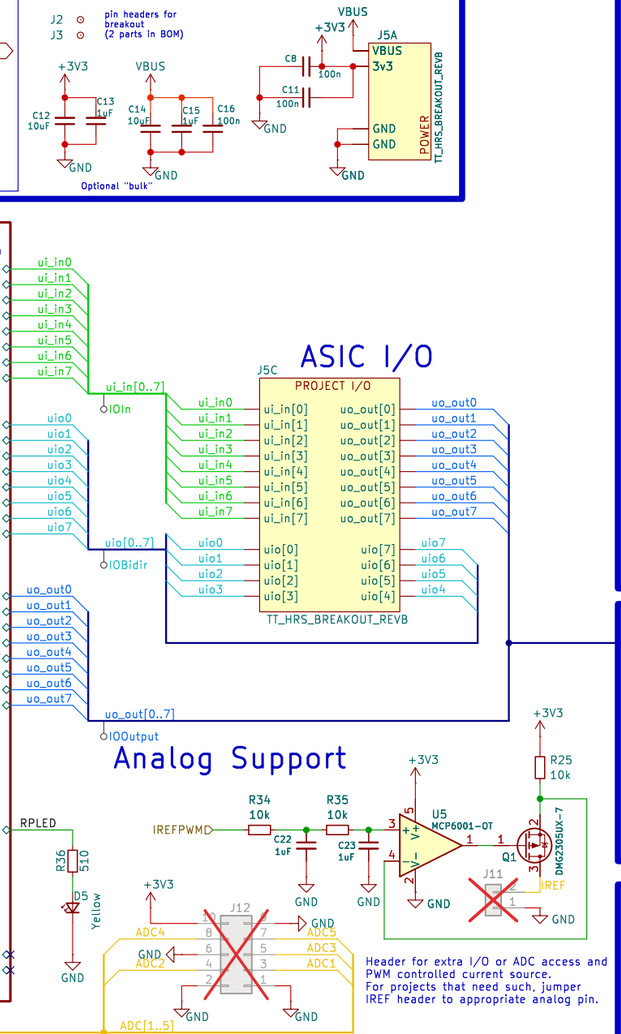


Edge connectors: Project

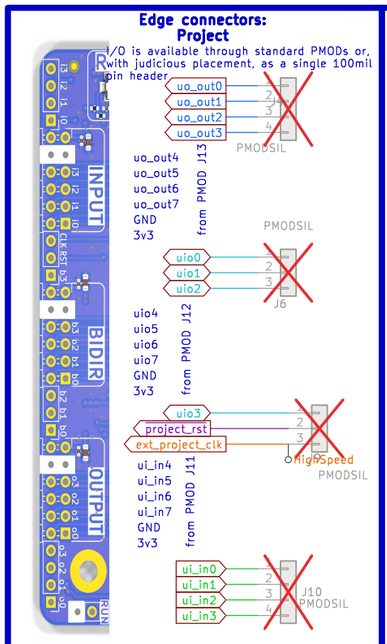

Edge connectors: Management


Project MUX, power and reserved pins available on this header




Indication

LEDs (Power good, GPIO)


7-segment Display

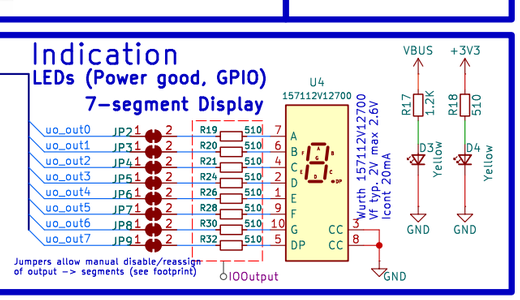


Misc Support

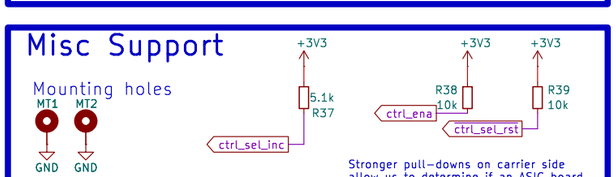

Analog

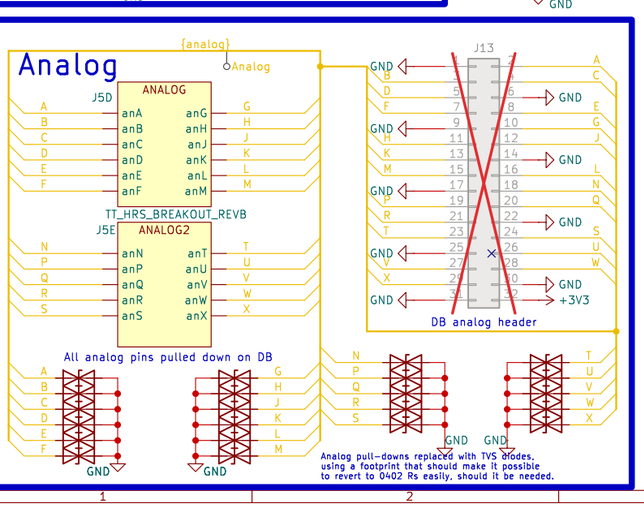

PMOD

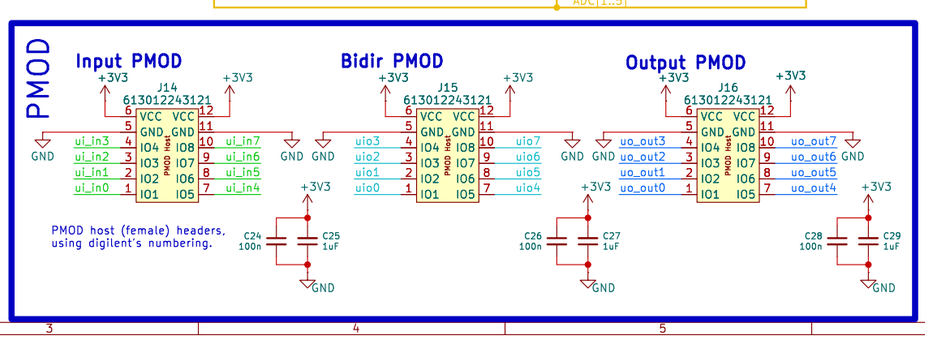

(C) 2025 Pat Deegan

Psychogenic Technologies INC

Sheet: /

File: tinytapeout-demo.kicad_sch

Title: Tiny Tapeout Demoboard v3


Size: A3	Date: 2026-06-23	**Rev: 3.3**
KiCad E.D.A. 9.0.9		Id: 1/2


RP2350B (QFN80) and Support


Recommended is the ABM8-272-T3 with a C_L of 10pF
but operating temp is -10 to 60C.
The AEC Q200 rated FC3BAEBGI12.0-T1 is specified for
-40 to 125C and the T variant -55 to 125, with a C_L of 12pF


Rule of thumb
C_a, C_b = 2 * C_L - 2 * C_{stray}
Typical stray cap, maybe ~5pF

For 12pF C_L = ((C_a * C_b)/(C_a + C_b)) + C_{stray}
use 14pF

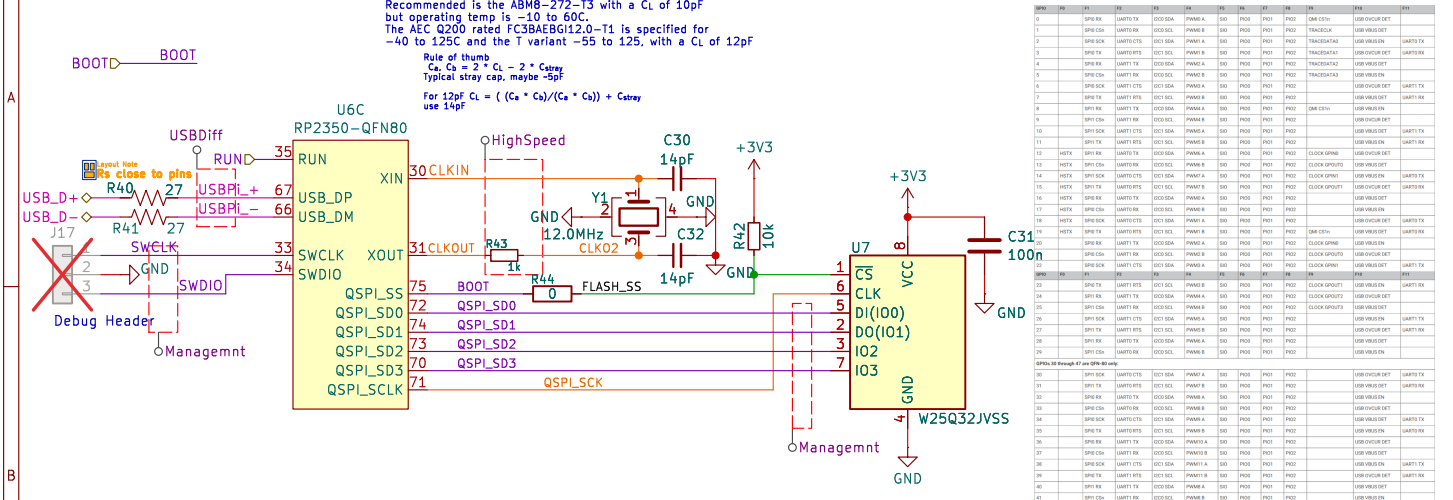

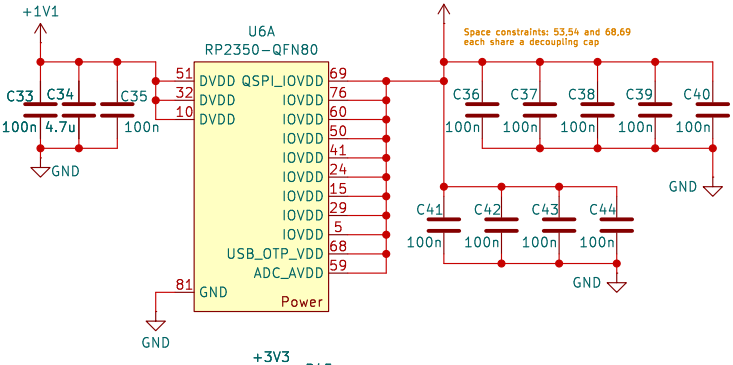

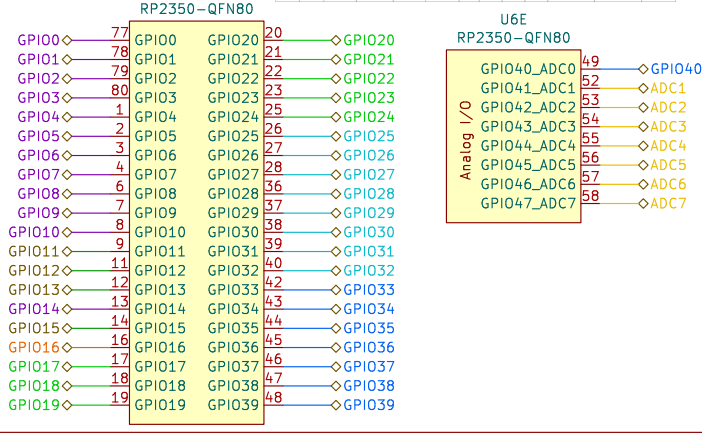

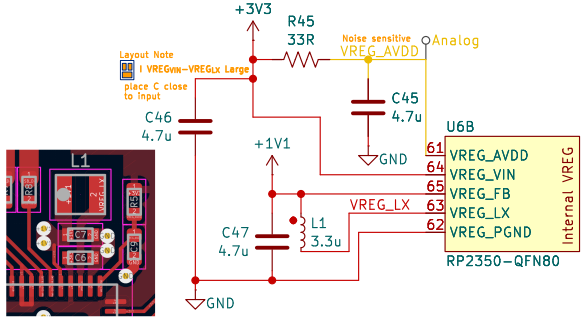

(C) 2025 Pat Deegan

Psychogenic Technologies INC

Sheet: /RP2350/
File: rp2350.kicad_sch

Title: RP2350B (QFN80) and Support

Size: User	Date: 2026-06-23	**Rev: 1.0**
KiCad E.D.A. 9.0.9		Id: 2/2