

Snidely Whiplash

FOH CHANNEL EQ SETUP – DiGiCo Quantum 225

Show	Snidely Whiplash
Show Date	2026-09-30
Venue	Fountain Square (outdoor)
Console	DiGiCo Quantum 225
Channels	17
FOH Engineer	Brian Lloyd
Monitor Engineer	–
Show Time	11:00am-1:00pm
Rev	Rev 1.0 Deep Build

DOCUMENT CONTENTS

1. Cover Page – show, venue, and personnel
2. Input List – color-coded full channel patch sheet
3. Patching – AES and Local inputs sorted by port
4. EQ Setup – 17 channels for DiGiCo Quantum 225
5. Reference – EQ structure, pan guide, bus grouping, soundcheck order

SHOW STYLE: Paint The Square Pink (American Cancer Society / Making Strides), 11a-1p. A long-running Cincinnati party band playing classic rock and pop to a lunchtime charity crowd, in warm, drying air.

Snidely Whiplash

VENUE: Fountain Square (outdoor)

DATE: 2026-09-30

REV: Rev 1.0 Deep Build

FOH: Brian Lloyd

MON: –

SHOW TIME: 11:00am-1:00pm


Ch	Instrument	Mic / DI	Patch	48V	Stand	Notes
■ DRUMS						
2	Kick	Audix D6	Local 2		Short	Only kick mic (sheet's Kick In on ch 1 is blank). Inside, off-centre toward the beater.
3	Snare	Audix i5	Local 3		Short	Top only – no bottom mic (ch 4 blank), so wires come from this mic.
5	Hat	Shure SM81	Local 5	✓	Boom	SM81 LF switch ASSUMED FLAT, pad OUT. If found on the 18 dB/oct step, drop the desk HPF to 200.
6	Rack 1	Audix D2	Local 6		Clip	Template gate ON (native, not patched by us). Sizes not notated; if the sheet's racks/floor don't match the kit, move the gate sidechain at the desk.
7	Rack 2	Audix D2	Local 7		Clip	Template gate ON (native). Same mic as Rack 1, slotted lower.
8	Floor	Audix D4	Local 8		Clip	Template gate ON (native, floor sidechain band).
9	Overheads	Shure Beta 27 (pair)	Local 9	✓	Boom	STEREO on fader 9 – sheet listed OH R on 10, which is the SNARE PL8 return (protected). Pad ASSUMED OUT, LF switch flat.
■ BASS						
11	Bass DI	Whirlwind IMP (DI)	Local 11		DI	Only bass source (ch 12 cab mic blank). Plot shows the bass amp 'Direct'. The IMP sits between instrument and amp.
■ GUITAR						
13	Guitar 1	Sennheiser e609	Local 13		Short	Hang over the grille, off-centre. Locker fork: SM57 offered on Guitar 2, Brian kept both e609s.
14	Guitar 2	Sennheiser e609	Local 14		Short	Hang over the grille, off-centre. Kept on e609 (locker fork declined).

Ch	Instrument	Mic / DI	Patch	48V	Stand	Notes
■ KEYS						
17	Keys L	Whirlwind IMP (DI)	Local 17		DI	Stereo per Brian (plot said '1 KEYS'). If only one line arrives, use 17 and leave 18.
18	Keys R	Whirlwind IMP (DI)	Local 18		DI	Stereo pair with 17.
■ VOCALS						
29	Drum Vox	Shure SM58	Local 29		Boom	Holds the FSQ template vocal EQ (Brian) – ring out at soundcheck. SM58 kept over Beta 58 (less cymbal wash).
33	Pete	Shure Beta 58A (Wireless 1)	Local 33		–	Wireless 1. Holds the FSQ template vocal EQ (Brian) – ring out at soundcheck. Confirm at load-in: house W1 or Pete's own wireless (plot: '1 WIRELESS MIC / MIC (provided)').
34	GTR 1 Voc	Shure Beta 58A (Wireless 2)	Local 34		–	Wireless 2. Holds the FSQ template vocal EQ (Brian) – ring out at soundcheck.
35	Bass Voc	Shure Beta 58A (Wireless 3)	Local 35		–	Wireless 3. Holds the FSQ template vocal EQ (Brian) – ring out at soundcheck.
36	GTR 2 Voc	Shure Beta 58A (Wireless 4)	Local 36		–	Wireless 4. Holds the FSQ template vocal EQ (Brian) – ring out at soundcheck.

– DRUMS –

Ch 2 | Kick

Mic: Audix D6

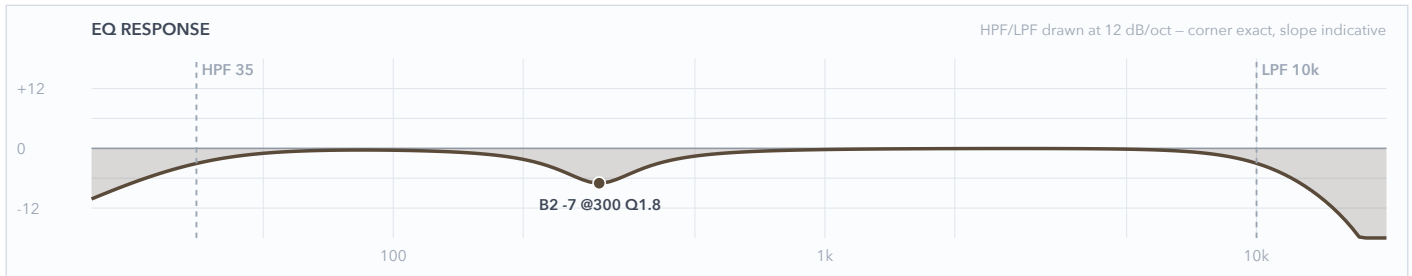


Mic Notes: Tape Op: peaks at 60 Hz, 4 kHz and 10 kHz, with 750 Hz about 15 dB down. The thump and the beater are already built in, so there's no boost anywhere. The box cut sits at 300, where PSW engineers cut a D6, well below the baked 750 scoop so it doesn't dig deeper into a hole the capsule already has. Dynamics: no gate (a single kick mic in a covers set; the D6 rejects well). COMP: Red, 4:1, fast, 2-3 dB GR target to steady the four-on-the-floor numbers.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	35 Hz	LC	–	–	High-pass
4	–	OFF	–	–	Flat
3	–	OFF	–	–	Flat
2	300 Hz	Bell	-7 dB	1.8	
1	–	OFF	–	–	Flat
HC	10 kHz	HC	–	–	Low-pass

Engineer Notes: One mic has to do inside and outside here, so the D6 keeps both of its humps: 60 Hz for the arch and 4k for the beater. The only move is -7 @ 300 to take out the box a plaza PA exaggerates. LPF 10k only shades the 10k fizz edge. In dry air the top doesn't need more help than that.

Ch 3 | Snare

Mic: Audix i5

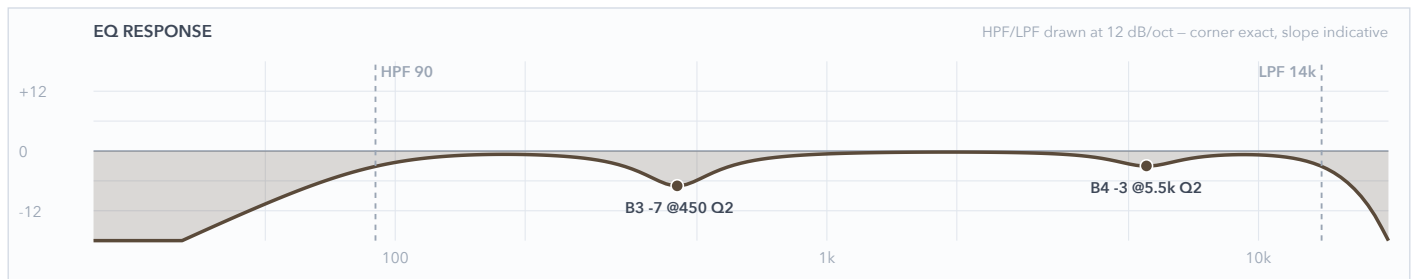


Mic Notes: SOS: +9 dB @ 5.5 kHz and +5 dB @ 150 Hz, which is the body the KB says beats the e604 outdoors. The crack is baked in, so it's trimmed -3 and never boosted. Only -3 because dry air takes top off over the throw anyway. Body at 150 left alone. GATE: none (it would chop ghost notes on shuffles). COMP: Green 4:1 fast attack-release, 3 dB GR.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	90 Hz	LC	–	–	High-pass
4	5.5 kHz	Bell	-3 dB	2	
3	450 Hz	Bell	-7 dB	2	
2	–	OFF	–	–	Flat
1	–	OFF	–	–	Flat
HC	14 kHz	HC	–	–	Low-pass

Engineer Notes: A fat classic-rock backbeat: keep the i5's 150 body, cut the 450 box at outdoor depth, and shave the baked 5.5k peak by only 3 dB since the plaza air is doing the rest. HPF 90 sheds the kick bleed. The snare plate on fader 10 adds the splash.

Ch 5 | Hat

Mic: Shure SM81

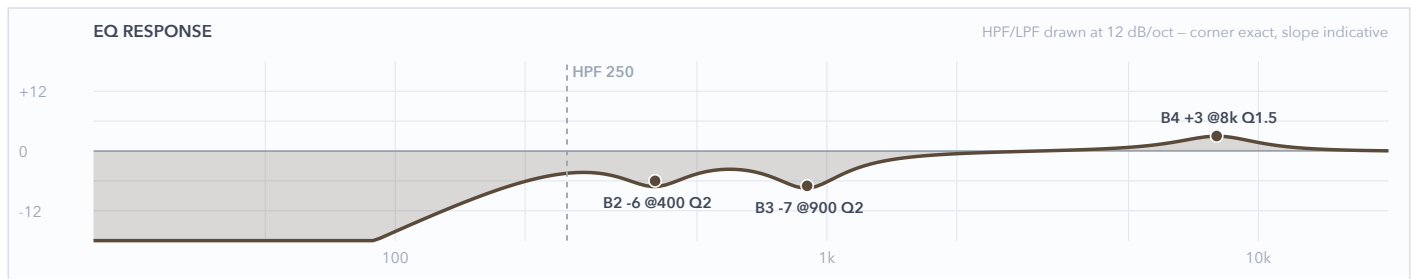


Mic Notes: Shure user guide: flat 20 Hz–20 kHz with no presence peak, so the +3 @ 8k boosts cymbal, not a capsule bump. That's the one HF boost on the show, and it's there because dry air drops sizzle over the throw. -6 @ 400 is snare bleed; -7 @ 900 is stick clank.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	250 Hz	LC	–	–	High-pass
4	8 kHz	Bell	+3 dB	1.5	
3	900 Hz	Bell	-7 dB	2	
2	400 Hz	Bell	-6 dB	2	
1	–	OFF	–	–	Flat
HC	–	HC	–	–	No LPF

Engineer Notes: The hat owns the 8k sizzle for this kit (the overheads are left flat above 3k and sit at HPF 300). HPF 250 plus the 400 cut keep the snare from arriving twice, and -7 @ 900 takes the clank so it reads as a hat, not a stick.

Ch 6 | Rack 1

Mic: Audix D2

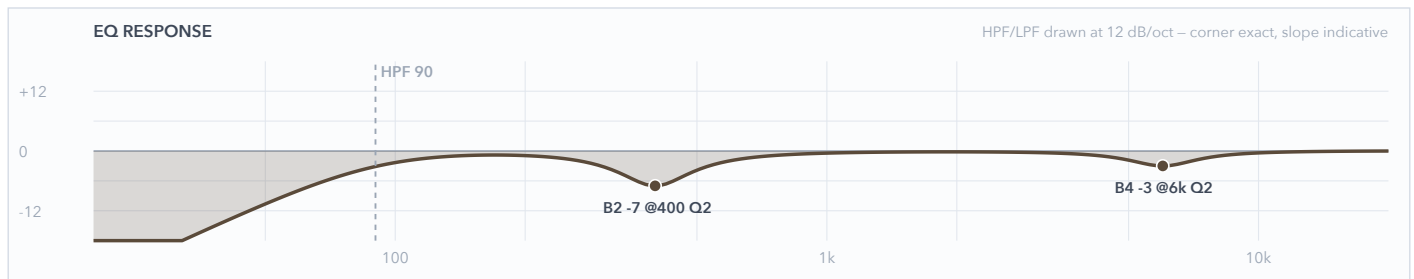


Mic Notes: Audix chart: ~+5 dB at 150–200, a sag to ~+2 through 500 Hz–1 kHz, and ~+5/+6 presence at 4–7k. PSW calls it edgy. The box cut is at 400, below the baked sag, and the stick trim is at 6000 in the top of the presence bump. GATE: template native gate on 6/7/8 (thr –36, rel 227 ms). Leave it, and open the release if long fills get chopped.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	90 Hz	LC	–	–	High-pass
4	6 kHz	Bell	-3 dB	2	
3	–	OFF	–	–	Flat
2	400 Hz	Bell	-7 dB	2	
1	–	OFF	–	–	Flat
HC	–	HC	–	–	No LPF

Engineer Notes: The small tom sits highest of the three: box lane 400 and stick lane 6000. The rack 2 and floor lanes step down from here, so three toms don't pile up in one octave on a fill.

Ch 7 | Rack 2

Mic: Audix D2

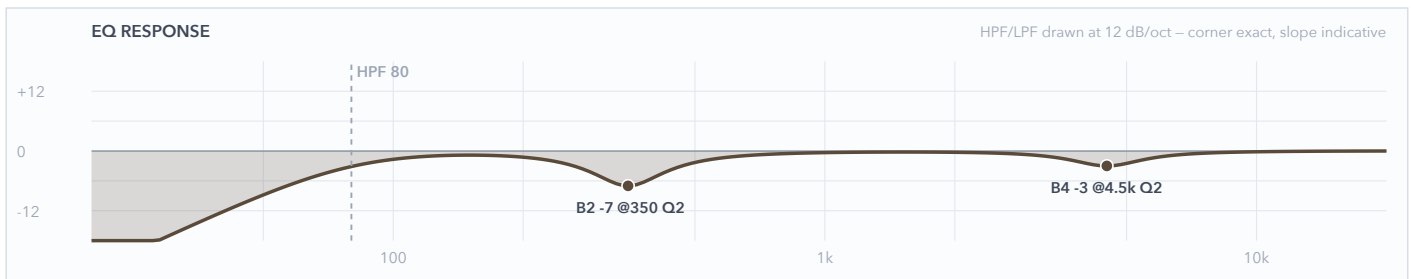


Mic Notes: Same D2 figures as Rack 1. Slotting is by drum size: box at 350 and the presence trim at 4500 (the bottom of the D2's 4-7k bump). The two racks share nothing but depth.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	80 Hz	LC	–	–	High-pass
4	4.5 kHz	Bell	-3 dB	2	
3	–	OFF	–	–	Flat
2	350 Hz	Bell	-7 dB	2	
1	–	OFF	–	–	Flat
HC	–	HC	–	–	No LPF

Engineer Notes: The middle tom: lanes at 350 and 4500, between Rack 1's 400 / 6000 and the floor's 300 / 5000. HPF 80 keeps a little more body than the small tom.

Ch 8 | Floor

Mic: Audix D4

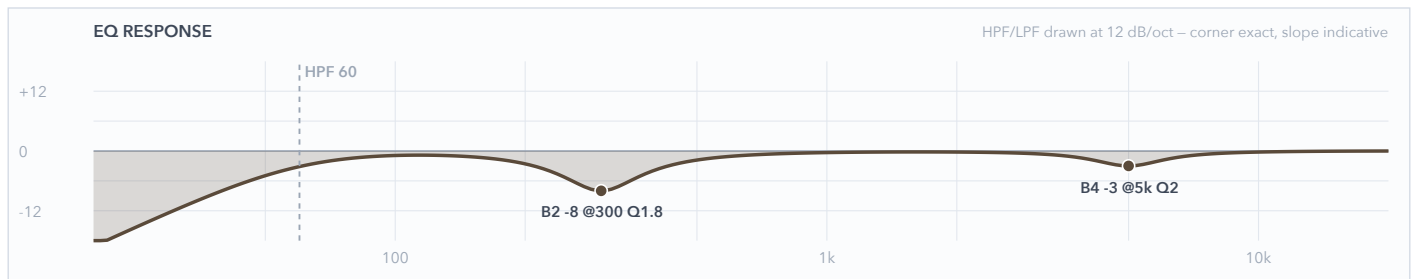


Mic Notes: RecordingHacks (current Audix chart): +6 dB @ 5 kHz, a second peak above 10k, and rolloff below 70 Hz. That's why the 5k is trimmed and never boosted, and why the thud is left to the capsule instead of a low boost. PSW's 80 Hz 'woomp' notch isn't used: rock wants that thud.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	60 Hz	LC	–	–	High-pass
4	5 kHz	Bell	-3 dB	2	
3	–	OFF	–	–	Flat
2	300 Hz	Bell	-8 dB	1.8	
1	–	OFF	–	–	Flat
HC	–	HC	–	–	No LPF

Engineer Notes: Deepest cut of the three toms (–8 @ 300) because the floor's muck is the one that fogs the bass. The 80-100 thud is untouched, and the baked 5k is trimmed –3.

Ch 9 | Overheads

Mic: Shure Beta 27 (pair)

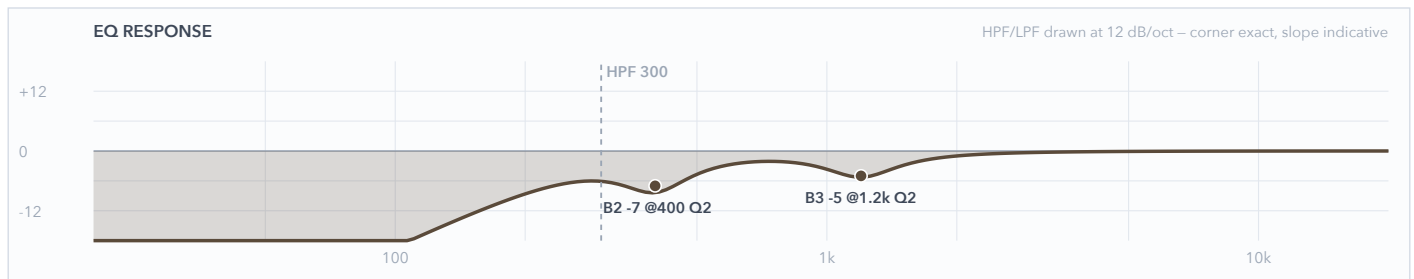

Mic Notes: RecordingHacks: flat 60 Hz–3 kHz, with two peaks of +2 dB or less at 5.5k and 9k. The KB's 9k fizz trim came from a humid night. At 27–43% RH that trim would cut real cymbal air, so the top is left flat.


Band	Freq	Type	Gain	Q	Notes / Rationale
LC	300 Hz	LC	–	–	High-pass
4	–	OFF	–	–	Flat
3	1.2 kHz	Bell	-5 dB	2	
2	400 Hz	Bell	-7 dB	2	
1	–	OFF	–	–	Flat
HC	–	HC	–	–	No LPF

Engineer Notes: Cymbals only: HPF 300 so the overheads don't duplicate the kick and toms, -7 @ 400 for bleed, and -5 @ 1200 for crash honk. Above 3k they're untouched. The hat channel owns the 8k sizzle.

– BASS –

Ch 11 | Bass DI

Mic: Whirlwind IMP (DI)

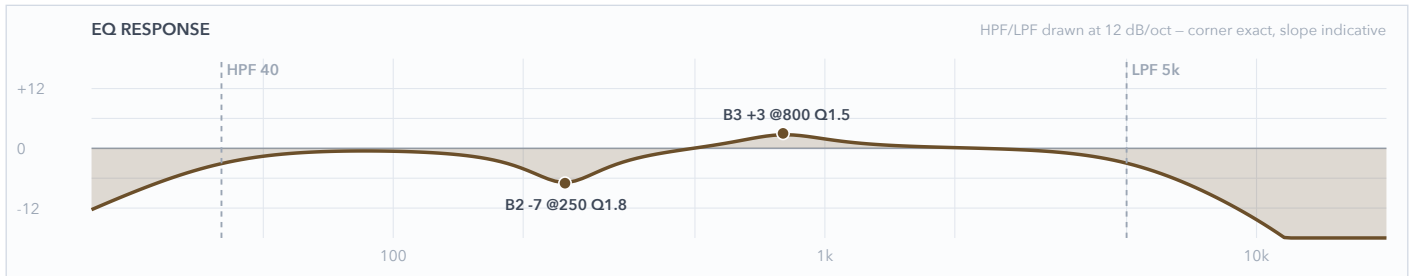


Mic Notes: Whirlwind: ± 1 dB 20 Hz-20 kHz, nothing baked, so the +3 @ 800 is legal (a flat DI). No low boost: the kick's D6 owns 60 and the bass sits above it on the HPF 40. COMP: Purple (opto), 4:1, 3-4 dB GR for note-to-note evenness.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	40 Hz	LC	–	–	High-pass
4	–	OFF	–	–	Flat
3	800 Hz	Bell	+3 dB	1.5	
2	250 Hz	Bell	-7 dB	1.8	
1	–	OFF	–	–	Flat
HC	5 kHz	HC	–	–	Low-pass

Engineer Notes: The DI carries the whole low end, so it stays round. -7 @ 250 clears the mud the two guitars and keys also live in, and +3 @ 800 lets the line read on the tops for people far from the subs. LPF 5k drops the string clack a DI exaggerates.

Ch 13 | Guitar 1

Mic: Sennheiser e609

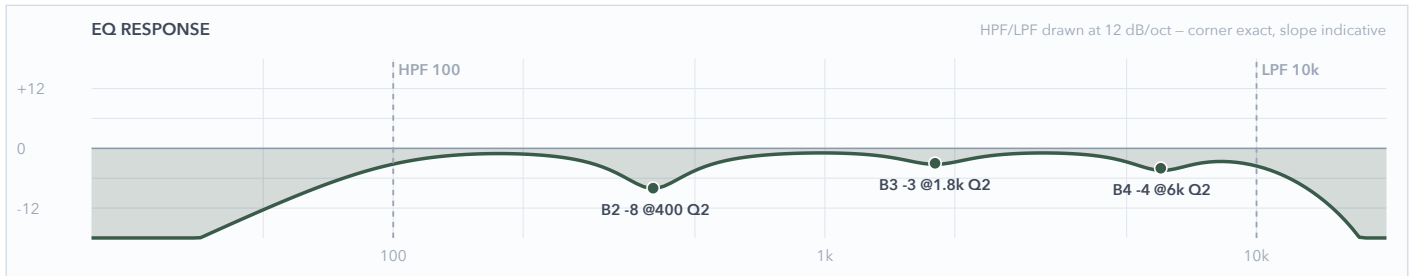


Mic Notes: Sennheiser: ~+3 dB lift 2.5–6k centred near 4k. GUITAR 1 OWNS THE TOP LANE: the 4k lift is kept, and only the 6k fizz above it is trimmed. -3 @ 1800 leaves the upper mids to Guitar 2.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	100 Hz	LC	–	–	High-pass
4	6 kHz	Bell	-4 dB	2	
3	1.8 kHz	Bell	-3 dB	2	
2	400 Hz	Bell	-8 dB	2	
1	–	OFF	–	–	Flat
HC	10 kHz	HC	–	–	Low-pass

Engineer Notes: Two e609s means the capsules can't separate the guitars, so the EQ does. Guitar 1 keeps its 4k presence and gives up a little at 1800. Guitar 2 does the opposite. Box -8 @ 400 is outdoor depth. If Tony's lead is on 14, swap the two curves at soundcheck.

Ch 14 | Guitar 2

Mic: Sennheiser e609

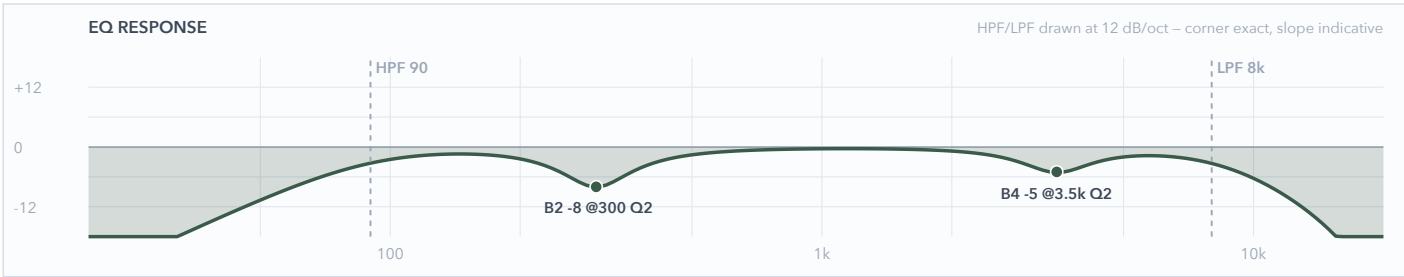


Mic Notes: Same e609 lift as Guitar 1. GUITAR 2 OWNS THE MID LANE: the lift is cut at 3500, inside the capsule's own bump, so Guitar 1's presence stands in front. The 1-2k honk is left alone for this guitar to live in. Box at 300 vs Guitar 1's 400.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	90 Hz	LC	–	–	High-pass
4	3.5 kHz	Bell	-5 dB	2	
3	–	OFF	–	–	Flat
2	300 Hz	Bell	-8 dB	2	
1	–	OFF	–	–	Flat
HC	8 kHz	HC	–	–	Low-pass

Engineer Notes: The mid-lane guitar: –5 @ 3500 hands the presence to Guitar 1, its 1-2k is left alone, and the box cut sits a third lower than Guitar 1's. LPF 8k keeps it behind. Nothing on these two curves matches.

Ch 17 | Keys L

Mic: Whirlwind IMP (DI)

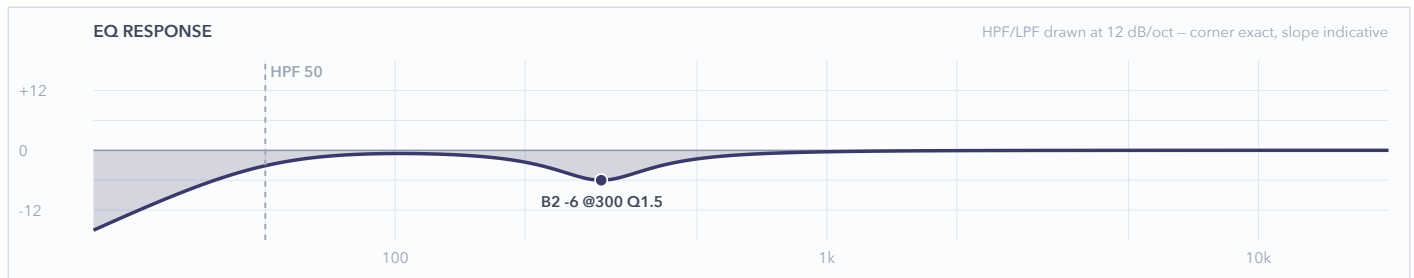


Mic Notes: IMP ± 1 dB, so there's no transducer to correct. The board is finished audio. One trim where it overlaps the guitars and bass. Identical to Keys R by design.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	50 Hz	LC	–	–	High-pass
4	–	OFF	–	–	Flat
3	–	OFF	–	–	Flat
2	300 Hz	Bell	-6 dB	1.5	
1	–	OFF	–	–	Flat
HC	–	HC	–	–	No LPF

Engineer Notes: Pete's keys fill under two guitars. -6 @ 300 makes room without thinning a piano or organ patch. The venue rule would say -8 , but a board's 300 is warmth, not mud. HPF 50 keeps the left hand.

Ch 18 | Keys R

Mic: Whirlwind IMP (DI)

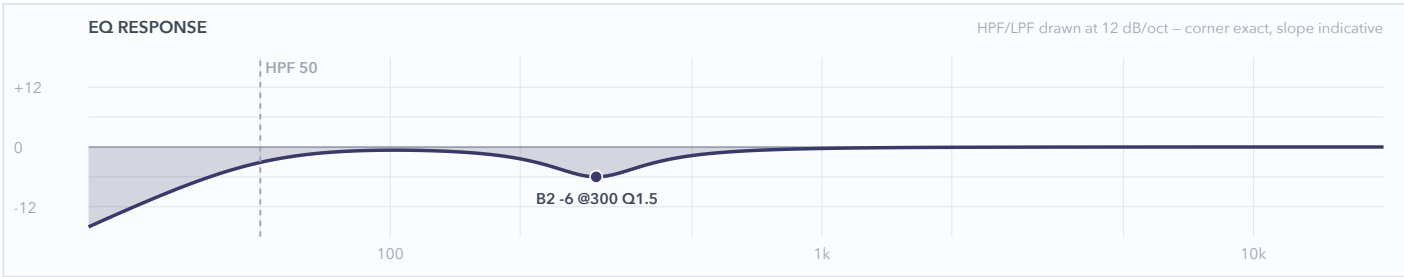

Mic Notes: Right half of the same board: identical curve to 17 so the stereo image doesn't tilt.


Band	Freq	Type	Gain	Q	Notes / Rationale
LC	50 Hz	LC	–	–	High-pass
4	–	OFF	–	–	Flat
3	–	OFF	–	–	Flat
2	300 Hz	Bell	-6 dB	1.5	
1	–	OFF	–	–	Flat
HC	–	HC	–	–	No LPF

Engineer Notes: Same as Keys L. Two halves of one instrument.

– VOCALS –

Ch 29 | Drum Vox

Mic: Shure SM58

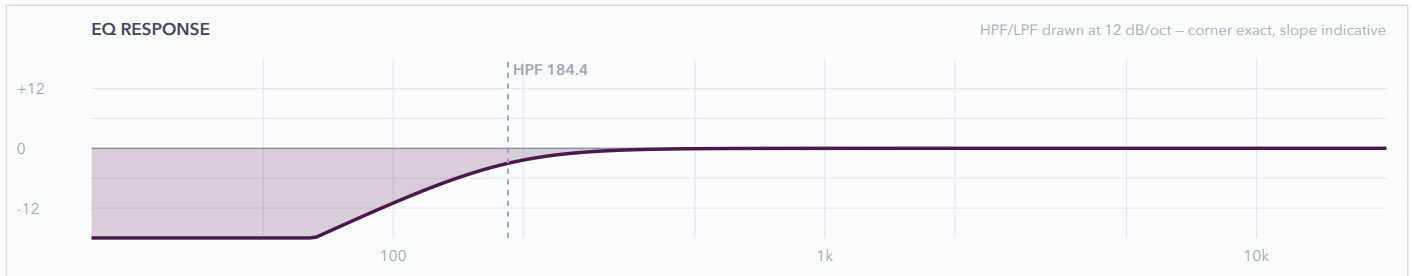


Mic Notes: Held curve: HPF 184.4 · B4 -18 @ 5024 Q20 notch · B3 -0.5 @ 2229 · B2 -6.3 @ 335 · B1 +0.5 @ 189 – every band FLAT in the .md so the template passes through. Shure: +5 dB presence at 4-6 kHz. At a kit that's where cymbal wash lands, and the template's -18 @ 5024 notch sits right on it. If the drummer's vocal fights the cymbals, the research-backed move is -4 @ 5000 and -7 @ 400.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	184.4 Hz	LC	–	–	High-pass
4	–	OFF	–	–	Flat
3	–	OFF	–	–	Flat
2	–	OFF	–	–	Flat
1	–	OFF	–	–	Flat
HC	–	HC	–	–	No LPF

Engineer Notes: Held at the FSQ house vocal curve (Brian's call). The 184 HPF already suits a BV at a kit.

Ch 33 | Pete

Mic: Shure Beta 58A (Wireless 1)

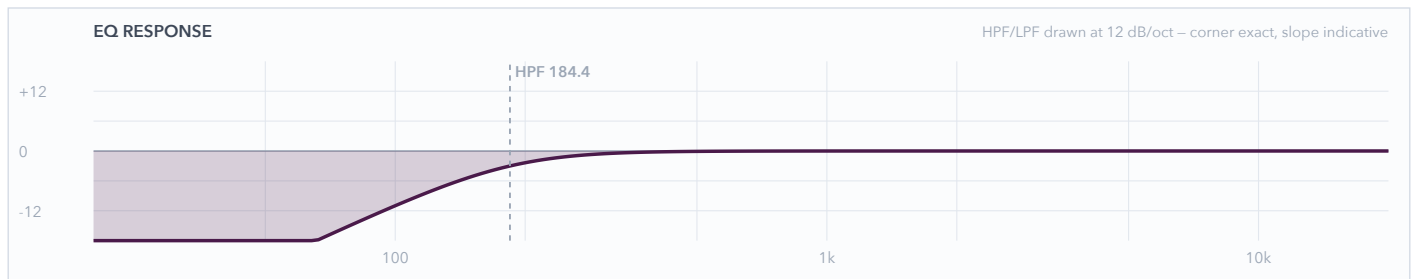


Mic Notes: Held curve: HPF 184.4 · B4 -18 @ 5024 Q20 notch · B3 -0.5 @ 2229 · B2 -6.3 @ 335 · B1 +0.5 @ 189 – every band FLAT in the .md so the template passes through. Shure: peaks near 4k and 10k, attenuated below 500. The template's -18 @ 5024 notch and -6.3 @ 335 already cover the 4k edge and the proximity box. If a BV fights at soundcheck, the research-backed slots are HPF 110-130 with separate nasal lanes (1000 / 1600 / 2500).

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	184.4 Hz	LC	–	–	High-pass
4	–	OFF	–	–	Flat
3	–	OFF	–	–	Flat
2	–	OFF	–	–	Flat
1	–	OFF	–	–	Flat
HC	–	HC	–	–	No LPF

Engineer Notes: Pete's lead: held on the house curve. The one thing to watch is HPF 184 on a male speaking voice. If his between-song talk sounds thin, pull the HPF to 120 at the desk.

Ch 34 | GTR 1 Voc

Mic: Shure Beta 58A (Wireless 2)

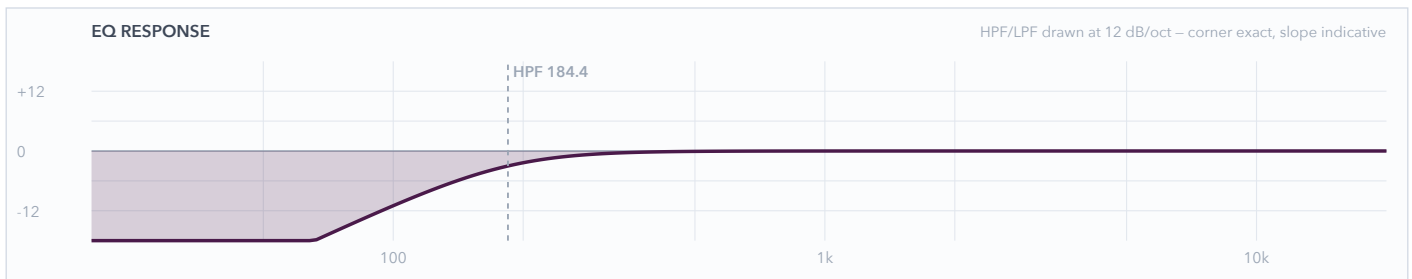


Mic Notes: Held curve: HPF 184.4 · B4 -18 @ 5024 Q20 notch · B3 -0.5 @ 2229 · B2 -6.3 @ 335 · B1 +0.5 @ 189 – every band FLAT in the .md so the template passes through. Shure: peaks near 4k and 10k, attenuated below 500. The template's -18 @ 5024 notch and -6.3 @ 335 already cover the 4k edge and the proximity box. If a BV fights at soundcheck, the research-backed slots are HPF 110-130 with separate nasal lanes (1000 / 1600 / 2500).

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	184.4 Hz	LC	–	–	High-pass
4	–	OFF	–	–	Flat
3	–	OFF	–	–	Flat
2	–	OFF	–	–	Flat
1	–	OFF	–	–	Flat
HC	–	HC	–	–	No LPF

Engineer Notes: Held on the house curve with the other vocals so the harmony stack matches Pete's.

Ch 35 | Bass Voc

Mic: Shure Beta 58A (Wireless 3)

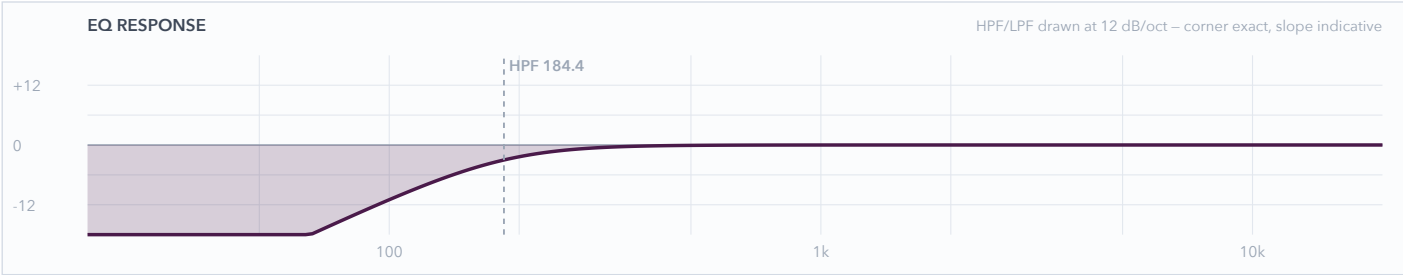


Mic Notes: Held curve: HPF 184.4 · B4 -18 @ 5024 Q20 notch · B3 -0.5 @ 2229 · B2 -6.3 @ 335 · B1 +0.5 @ 189 – every band FLAT in the .md so the template passes through. Shure: peaks near 4k and 10k, attenuated below 500. The template's -18 @ 5024 notch and -6.3 @ 335 already cover the 4k edge and the proximity box. If a BV fights at soundcheck, the research-backed slots are HPF 110-130 with separate nasal lanes (1000 / 1600 / 2500).

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	184.4 Hz	LC	–	–	High-pass
4	–	OFF	–	–	Flat
3	–	OFF	–	–	Flat
2	–	OFF	–	–	Flat
1	–	OFF	–	–	Flat
HC	–	HC	–	–	No LPF

Engineer Notes: Held on the house curve with the other vocals so the harmony stack matches Pete's.

Ch 36 | GTR 2 Voc

Mic: Shure Beta 58A (Wireless 4)

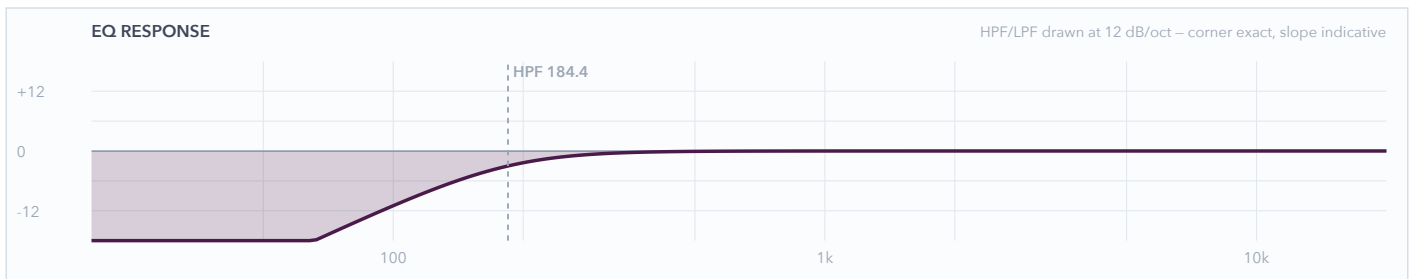

Mic Notes: Held curve: HPF 184.4 · B4 -18 @ 5024 Q20 notch · B3 -0.5 @ 2229 · B2 -6.3 @ 335 · B1 +0.5 @ 189 – every band FLAT in the .md so the template passes through. Shure: peaks near 4k and 10k, attenuated below 500. The template's -18 @ 5024 notch and -6.3 @ 335 already cover the 4k edge and the proximity box. If a BV fights at soundcheck, the research-backed slots are HPF 110-130 with separate nasal lanes (1000 / 1600 / 2500).

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	184.4 Hz	LC	–	–	High-pass
4	–	OFF	–	–	Flat
3	–	OFF	–	–	Flat
2	–	OFF	–	–	Flat
1	–	OFF	–	–	Flat
HC	–	HC	–	–	No LPF

Engineer Notes: Held on the house curve with the other vocals so the harmony stack matches Pete's.