

Buffalo Wabs and the Price Hill Hustle — QUICK LINKS

Fountain Square (outdoor) · DiGiCo Quantum 225 · 2026-08-28 · Rev 2.1 Deep Think

Click any row to jump. Page numbers are MASTER pages — the reader's bookmark sidebar carries the same map.

DOCUMENTS			
Cover		p 2	
Input List		p 3	
EQ Rationale		p 23	
What changed — and why		p 23	
Question round / decisions		p 24	
Reverb — Seventh Heaven		p 24	
Research & Method		p 25	
EQ PAGES — BY SECTION AND CHANNEL (SHOW PACKET)			
DRUMS		p 6	
1 Kick In	p6	2 Kick Out	p7
5 Hat	p9	6 Rack 1	p10
9 Overheads	p12	3 Snare Top	p8
		8 Floor	p11
RHYTHM		p 13	
11 Upright Bass	p13		
STRINGS		p 14	
13 Aco Mando	p14	14 Resonator	p15
16 Acoustic Gtr	p17	15 Elec Mnd/Gtr	p16
		17 Mando/Bjo/Gtr	p18
VOCALS		p 19	
33 W1 Scott	p19	34 W2 Wabbs	p20
36 W4 Bill	p22	35 W3 Casey	p21
EQ RATIONALE — BY SECTION			
DRUMS	p28	RHYTHM	p29
VOCALS	p30	STRINGS	p29

Buffalo Wabs and the Price Hill Hustle

FOH CHANNEL EQ SETUP — DiGiCo Quantum 225

Show	Buffalo Wabs and the Price Hill Hustle
Show Date	2026-08-28
Venue	Fountain Square (outdoor)
Console	DiGiCo Quantum 225
Channels	17
FOH Engineer	Brian Lloyd
Monitor Engineer	
Show Time	
Rev	Rev 2.1 Deep Think

DOCUMENT CONTENTS

1. Cover Page — show, venue, and personnel
2. Input List — color-coded full channel patch sheet
3. Patching — AES and Local inputs sorted by port
4. EQ Setup — 17 channels for DiGiCo Quantum 225
5. Reference — EQ structure, pan guide, bus grouping, soundcheck order

SHOW STYLE: Open-air Fountain Square — no room gain, so cuts run deeper than indoors (–6 to –9 typical, up to –10 on mud/box) and the low end is supported by the L-Acoustics KS21 subs rather than room reinforcement. Show window is warm-dry early (83°F/48% RH at 6pm) rising to humid by the main set (72°F/75% at 9pm, 82% by 11pm), wind light 4–8 mph, rain 1%. Humid-but-not-extreme: HF carries fine, so presence is protected and no aggressive HF boosts are used; the Beta 27 9 k fizz and Beta 58A baked top are trimmed rather than lifted. Casey sings from the kit, so the drum-mic patterns (i5 focus, D2/D4 hypercardioid, B27 supercardioid) were kept over any more-open Earthworks alternative for rejection.

Buffalo Wabs and the Price Hill Hustle

VENUE: Fountain Square (outdoor)

DATE: 2026-08-28

REV: Rev 2.1 Deep Think

FOH: Brian Lloyd

MON:

SHOW TIME:

Ch	Instrument	Mic / DI	Patch	48V	Stand	Notes
■ DRUMS						
1	Kick In	Shure Beta 91A	Local 1	✓	—	Two-mic kick with CH2 (Beta 52). Treat the pair as ONE signal — same VCA, panned together, blend constant. Polarity: sum in mono at soundcheck, flip one if thinner. 91A HPF'd to hand the real bottom to the 52.
2	Kick Out	Shure Beta 52A	Local 2		Short	Outside/resonant-head mic of the two-mic kick. Owns BOTTOM + punch. Little/no HPF so it delivers the real low weight.
3	Snare Top	Audix i5	Local 3		Short	No snare bottom this show (ch4 unused).
5	Hat	Shure SM81	Local 5	✓	Boom	SM81 SDC on a boom over the hats.
6	Rack 1	Audix D2	Local 6		Clip	One rack tom only (ch7 unused). GATE (doc only): Green/FET thr ~-30, atk 5-10 ms (let the tom bloom), so ghost hits and press rolls live.
8	Floor	Audix D4	Local 8		Clip	GATE (doc only): Green/FET thr ~-30, atk 5-10 ms, long release — floor tom should ring in an Americana kit, don't choke it.
9	Overheads	2× Shure Beta 27	Local 9	✓	Boom	STEREO pair on ONE fader (FSQ template fader 9 is a stereo channel — both B27s live here, never split 9/10; ch10 is the SNARE PL8 reverb return).
■ RHYTHM						
11	Upright Bass	Whirlwind IMP (DI)	Local 11		DI	Pickup/piezo upright into a passive DI (Whirlwind IMP). No bass mic this show (ch12 unused). COMP (doc only): Purple/opto, ~3:1, 4-6 dB GR to even out pizz note-to-note.


Ch	Instrument	Mic / DI	Patch	48V	Stand	Notes
■ STRINGS						
13	Aco Mando	XLR (pickup DI)	Local 13		DI	Scott's acoustic mandolin, onboard pickup XLR (locker-exempt). Confirm phantom need at line check.
14	Resonator	XLR (pickup DI)	Local 14		DI	Reso/dobro onboard pickup, XLR (locker-exempt).
15	Elec Mnd/Gtr	XLR (cab-sim direct)	Local 15		DI	SHARED channel — electric mandolin OR Matt's electric guitar (XLR, cab-sim/modeler direct feed). Not simultaneous. RETUNE at soundcheck for the active instrument: electric guitar wants the LPF for fizz + more 3.5k trim; electric mando wants a hair more 1.5k. Locker-exempt (line feed).
16	Acoustic Gtr	XLR (pickup DI)	Local 16		DI	Matt's acoustic, onboard pickup XLR (locker-exempt).
17	Mando/Bjo/Gtr	XLR (pickup DI)	Local 17		DI	Utility instrument-swap channel — mandolin / 5-string banjo / acoustic guitar. This is where the 5-string banjo now lives (the dedicated banjo channel was dropped in this rev). RETUNE the 2.5k quack cut per whichever instrument is live: banjo wants it narrower + a 250 boom cut, acoustic a hair lower.
■ VOCALS						
33	W1 Scott	Shure Beta 58A (wireless)	Local 33		—	House wireless 1 (FSQ fader 33). Overrides the template's stock wireless curve/notch — ring out at soundcheck. COMP (doc only): Blue/Neve ~2.5:1, 3–4 dB GR.
34	W2 Wabbs	Shure Beta 58A (wireless)	Local 34		—	House wireless 2 (FSQ fader 34) — Matt 'Buffalo Wabs', LEAD. Overrides template wireless curve — most body kept of the four. COMP (doc only): Blue/Neve ~3:1, 3–4 dB GR.

Ch	Instrument	Mic / DI	Patch	48V	Stand	Notes
35	W3 Casey	Shure Beta 58A (wireless)	Local 35		—	House wireless 3 (FSQ fader 35) — Casey sings FROM THE KIT, so kit bleed into this mic is the constraint. Ride the digital trim; the supercardioid pattern is doing the rejection. GATE/DUCK (doc only): consider a shallow duck off the kit VCA. COMP (doc only): Blue/Neve ~3:1, 3–4 dB GR.
36	W4 Bill	Shure Beta 58A (wireless)	Local 36		—	House wireless 4 (FSQ fader 36) — Bill 'Bullseye Bill', the upright player; treated as the low/bass voice of the harmony stack. Lowest HPF of the four. COMP (doc only): Blue/Neve ~2.5:1, 3–4 dB GR.

■ DRUMS ■

Ch 1 | Kick In

Mic: Shure Beta 91A

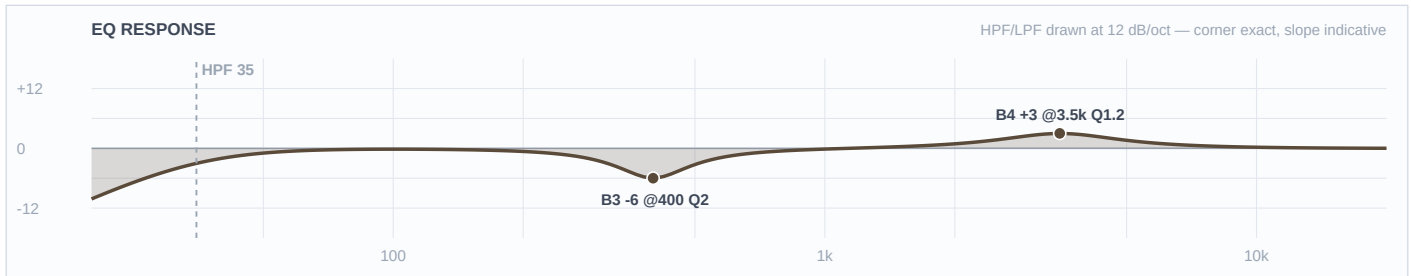


Mic Notes: Beta 91A boundary INSIDE the kick — owns the ATTACK/click lane (Shure/Sweetwater: built-in contour switch tightens lows to complement the outside mic). GATE (doc only): Green/FET, thr ~-28, atk fast, keeps foot-stomp dynamics.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	35 Hz	LC	—	—	High-pass
4	3.5 kHz	Bell	+3 dB	1.2	
3	400 Hz	Bell	-6 dB	2	
2	—	OFF	—	—	Flat
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: 91A owns attack: +3@3.5k gives the beater snap the Americana kick needs (moderate, not metal-click). -6@400 kills the boxy shell boom the boundary picks up inside — FSQ-deep. Lows left flat here; the 52 owns bottom, so no low stacking across the pair. HPF 35.

Ch 2 | Kick Out

Mic: Shure Beta 52A

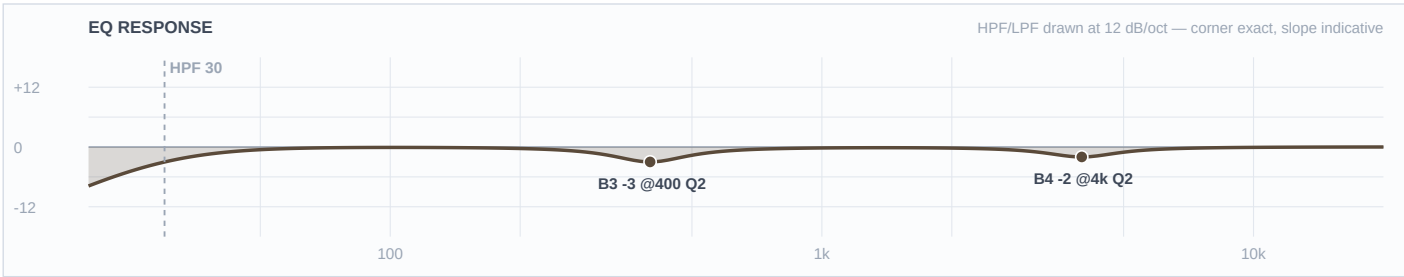


Mic Notes: Beta 52A — tailored kick capsule (Shure): baked scoop ~400 Hz + lifts ~60 Hz & ~4 kHz. Capsule gate: don't stack a full 400 cut (already scooped) or a 4k boost (91A owns attack).

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	30 Hz	LC	—	—	High-pass
4	4 kHz	Bell	-2 dB	2	
3	400 Hz	Bell	-3 dB	2	
2	—	OFF	—	—	Flat
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: 52 owns the low weight — left FLAT: the capsule already bakes a ~60 Hz lift and the KS21 subs carry the bottom outdoors, so a boost here would stack on the voiced peak. -3@400 is LIGHT because the capsule already scoops there. -2@4k DE-STACKS from the 91A's 3.5k attack so the beater isn't doubled. HPF 30.

Ch 3 | Snare Top

Mic: Audix i5

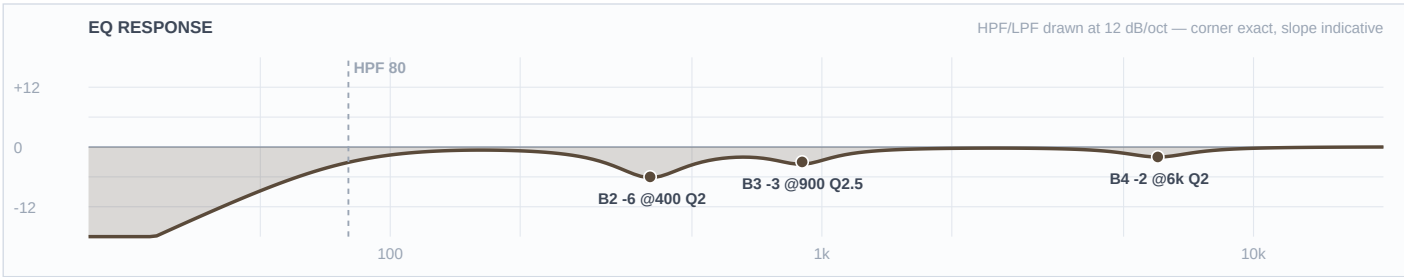


Mic Notes: Audix i5 — baked +5 dB @150 Hz (body) and +9 dB @5.5 kHz (crack), broad 3–8 kHz presence (RecordingHacks/SoundOnSound/Barry Rudolph). Capsule gate: crack is IN the mic → NO presence boost.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	80 Hz	LC	—	—	High-pass
4	6 kHz	Bell	-2 dB	2	
3	900 Hz	Bell	-3 dB	2.5	
2	400 Hz	Bell	-6 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: Cut-only shaping — the capsule already delivers body (150) and crack (5.5k). -6@400 clears the box for outdoor clarity (FSQ-deep); -3@900 tames snare ring; -2@6k just softens the baked-peak clang in the humid evening air while keeping the cut that lets it slice the open field. HPF 80 preserves the 150 body.

Ch 5 | Hat

Mic: Shure SM81

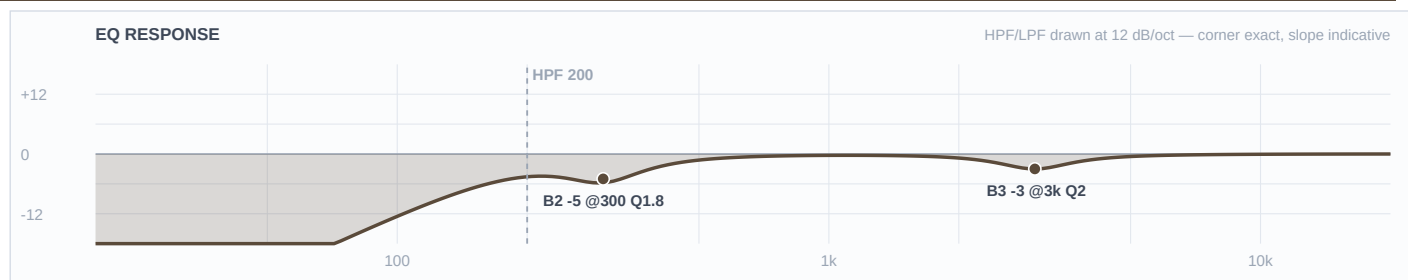


Mic Notes: SM81 — flat, honest SDC (Shure), no baked hype. Nothing to un-do; shape is all subtractive to remove kit spill.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	200 Hz	LC	—	—	High-pass
4	—	OFF	—	—	Flat
3	3 kHz	Bell	-3 dB	2	
2	300 Hz	Bell	-5 dB	1.8	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: HPF 200 — the hat has no useful lows and this dumps snare/kick spill. -5@300 kills the boxy snare bleed the mic picks up; -3@3k tames stick clang. No air boost — SM81 top is clean and the humid evening carries HF fine.

Ch 6 | Rack 1

Mic: Audix D2

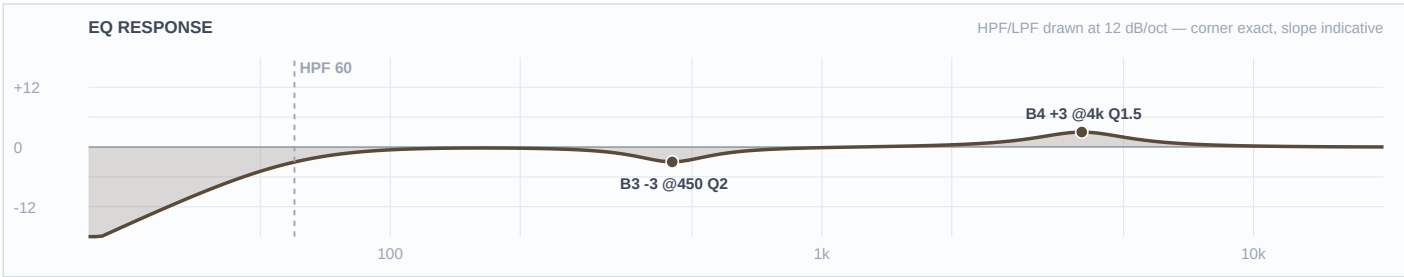


Mic Notes: Audix D2 — voiced for rack toms: +150 Hz body, a 500 Hz–1 kHz DIP, subtle upper-mid lift, fast transient, tight hypercardioid 30 dB+ off-axis rejection (Audix/Thomann/RecordingHacks). Capsule gate: mud already scooped → mid cut is LIGHT.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	60 Hz	LC	—	—	High-pass
4	4 kHz	Bell	+3 dB	1.5	
3	450 Hz	Bell	-3 dB	2	
2	—	OFF	—	—	Flat
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: +3@4k gives the stick attack that lets the tom cut the outdoor mix (D2 owns this lane — floor tom's attack sits lower). -3@450 is deliberately light because the capsule already dips 500–1k; a full FSQ-deep cut would hollow it. Body left to the baked 150. HPF 60.

Ch 8 | Floor

Mic: Audix D4

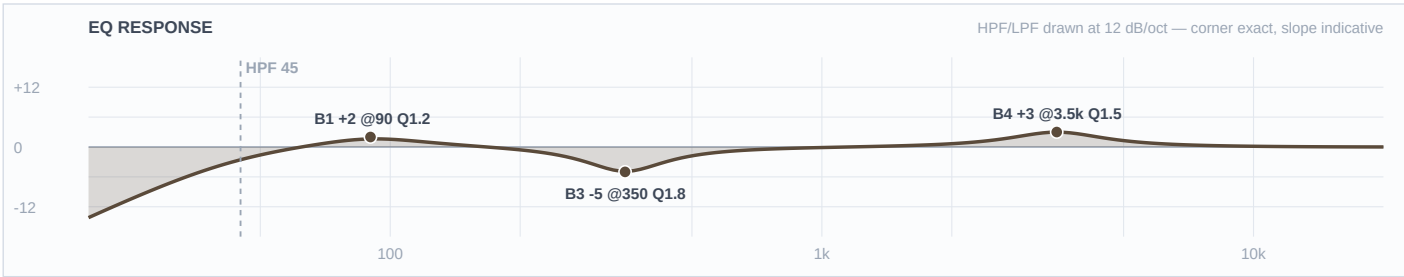


Mic Notes: Audix D4 — 40 Hz–18 k, focused low-mid, punchy low end without mud, less LF boost than the D2 (Audix/RecordingHacks). Handles 144 dB SPL.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	45 Hz	LC	—	—	High-pass
4	3.5 kHz	Bell	+3 dB	1.5	
3	350 Hz	Bell	-5 dB	1.8	
2	—	OFF	—	—	Flat
1	90 Hz	Bell	+2 dB	1.2	
HC	—	HC	—	—	No LPF

Engineer Notes: +2@90 adds the floor weight the D4 extends to (subs carry it outdoors but the tom wants its own body). -5@350 clears the box. +3@3.5k gives stick definition a notch below the rack's 4k so the two toms occupy different attack lanes. HPF 45.

Ch 9 | Overheads

Mic: 2× Shure Beta 27

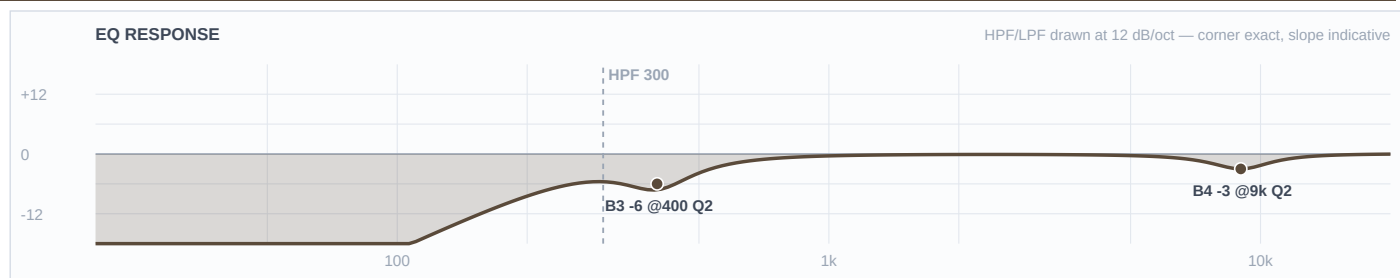


Mic Notes: Shure Beta 27 — flat 60 Hz–3 k, small +2 dB peaks at 5.5 k & 9 k, supercardioid consistent below 6.4 k (RecordingHacks/Shure). KB weakness: slight 9 k fizz on bright cymbals — the target here.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	300 Hz	LC	—	—	High-pass
4	9 kHz	Bell	-3 dB	2	
3	400 Hz	Bell	-6 dB	2	
2	—	OFF	—	—	Flat
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: Cut-only — an OH pair on a string-band stage is a cymbal + spill mic, not a boost source. HPF 300 dumps kit lows and stage rumble. -3@9k tames the Beta 27's known fizz (worse in humid air). -6@400 kills snare/tom bleed box for outdoor separation. No air boost — supercardioid rejection is why these mics stay over an open stage.

Ch 11 | Upright Bass

Mic: Whirlwind IMP (DI)

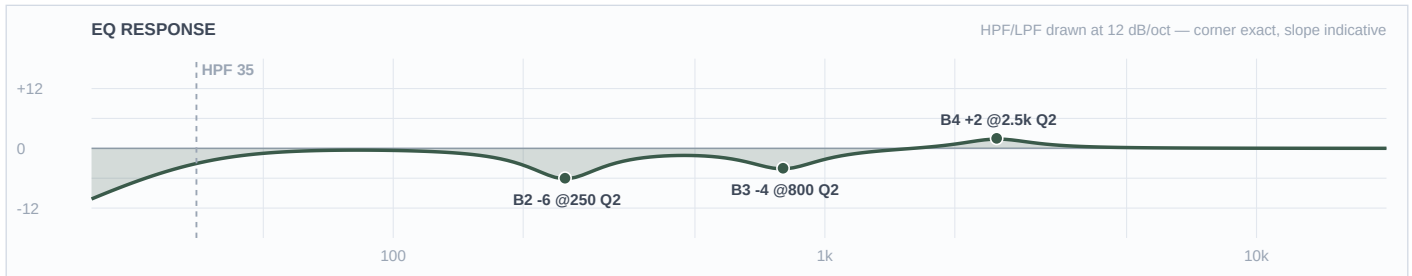


Mic Notes: Whirlwind IMP — passive, honest DI (KB): no coloration, slight HF/level loss into low-Z. All character is the pickup; upright pizz through piezo = mud + honk to clear.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	35 Hz	LC	—	—	High-pass
4	2.5 kHz	Bell	+2 dB	2	
3	800 Hz	Bell	-4 dB	2	
2	250 Hz	Bell	-6 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -6@250 is the main move — pickup mud that fogs pitch outdoors (FSQ-deep). -4@800 clears piezo honk. +2@2.5k adds the finger/pizz attack that carries note definition across the open field. HPF 35 keeps the low E (41 Hz) fundamental intact — this is the band's bottom, so the low band stays flat.

Ch 13 | Aco Mando

Mic: XLR (pickup DI)

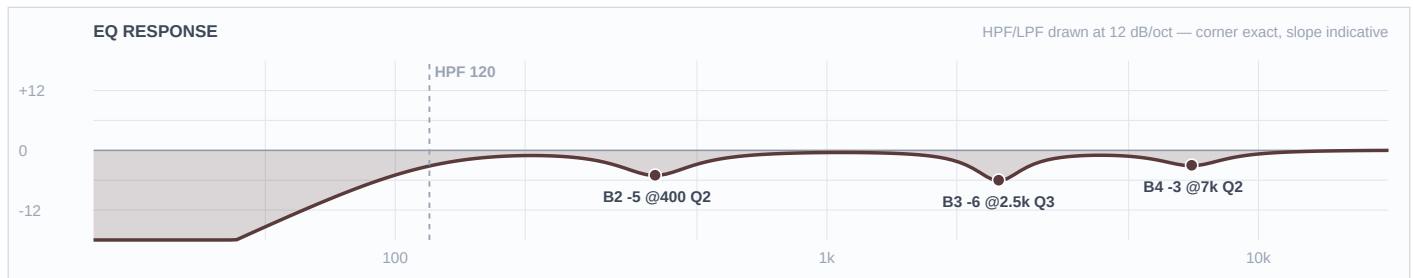


Mic Notes: Piezo/pickup mandolin — the 2.5-3 kHz quack is the signature problem, plus 400 box and 6-8 k brittle (Premier Guitar / Mandolin Cafe / Gearspace piezo threads).

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	120 Hz	LC	—	—	High-pass
4	7 kHz	Bell	-3 dB	2	
3	2.5 kHz	Bell	-6 dB	3	
2	400 Hz	Bell	-5 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -6@2.5k (narrow Q3) is the quack cut that does the heavy lifting - FSQ-deep for a piezo. -5@400 clears box. -3@7k tames brittle chop attack. HPF 120 (mandolin bottoms at G3 ~196 Hz). Cut-forward - piezo mandolin needs no boosts.

Ch 14 | Resonator

Mic: XLR (pickup DI)

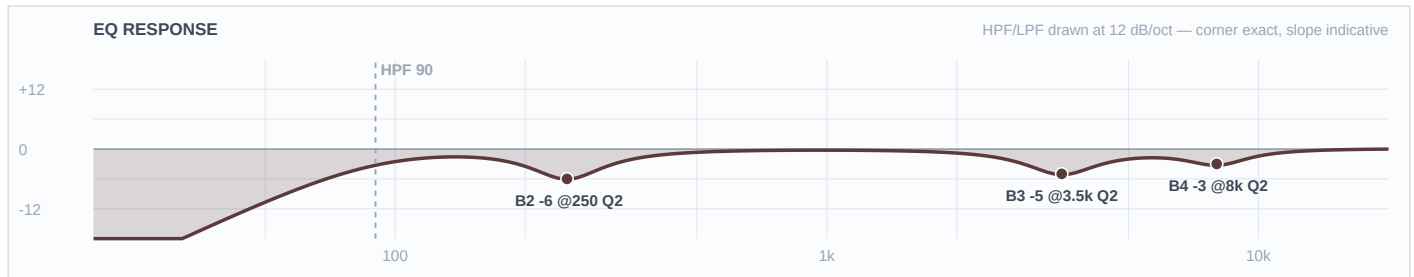


Mic Notes: Resonator = metal-bar-on-metal-cone harshness + piezo. Forum standard: cut ~250 Hz by ~6 dB, and the 3-4 k metallic harshness is the amplified-tone problem (Gearspace 'Taming Dobro Harshness' / Banjo Hangout).

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	90 Hz	LC	—	—	High-pass
4	8 kHz	Bell	-3 dB	2	
3	3.5 kHz	Bell	-5 dB	2	
2	250 Hz	Bell	-6 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -6@250 clears the mud/honk (per the dobro-live consensus, FSQ-deep). -5@3.5k tames the metallic bark that gets brutal amplified. -3@8k softens the brittle cone top in the humid air. Cut-only - the reso is bright by nature, nothing to add. HPF 90.

Ch 15 | Elec Mnd/Gtr

Mic: XLR (cab-sim direct)

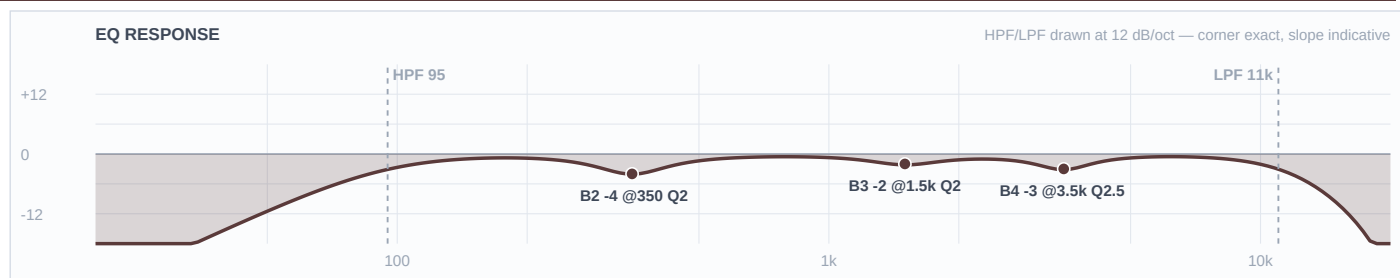


Mic Notes: Cab-simulated XLR direct feed = treat as a MIC'D CAB — the IR already bakes the cab's presence/rolloff voicing, so CUTS ONLY, no boosts into the baked shaping (KB: capsule-gate-covers-cab-IRs). Amp-sim fizz lives 3-5 k + above 10-12 k (Sweetwater/Waves/HomeMusicCreator).

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	95 Hz	LC	—	—	High-pass
4	3.5 kHz	Bell	-3 dB	2.5	
3	1.5 kHz	Bell	-2 dB	2	
2	350 Hz	Bell	-4 dB	2	
1	—	OFF	—	—	Flat
HC	11 kHz	HC	—	—	Low-pass

Engineer Notes: Cut-only, cab-sim treated as a mic'd cab. LPF 11k kills the digital top fizz of the direct feed. -3@3.5k tames the harsh presence bark that gets strident amplified outdoors; -4@350 clears cab-sim box; -2@1500 pulls nasal honk that suits both a bright electric mando and a lead electric. No boosts - the IR bakes the voicing. HPF 95.

Ch 16 | Acoustic Gtr

Mic: XLR (pickup DI)

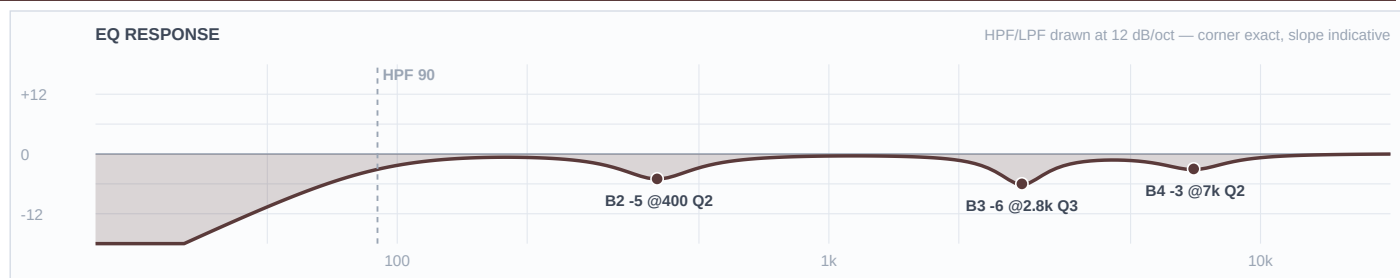


Mic Notes: Piezo acoustic — the classic five-fix (Fader&Knob / Premier Guitar): 2.5-3 k quack is primary, 400 box, 6-8 k brittle.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	90 Hz	LC	—	—	High-pass
4	7 kHz	Bell	-3 dB	2	
3	2.8 kHz	Bell	-6 dB	3	
2	400 Hz	Bell	-5 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -6@2.8k narrow is the quack cut that makes a piezo sound like a guitar (FSQ-deep). -5@400 box; -3@7k brittle. Body left alone (DI is thin, no reason to cut it, no vocal-style boost). HPF 90.

Ch 17 | Mando/Bjo/Gtr

Mic: XLR (pickup DI)

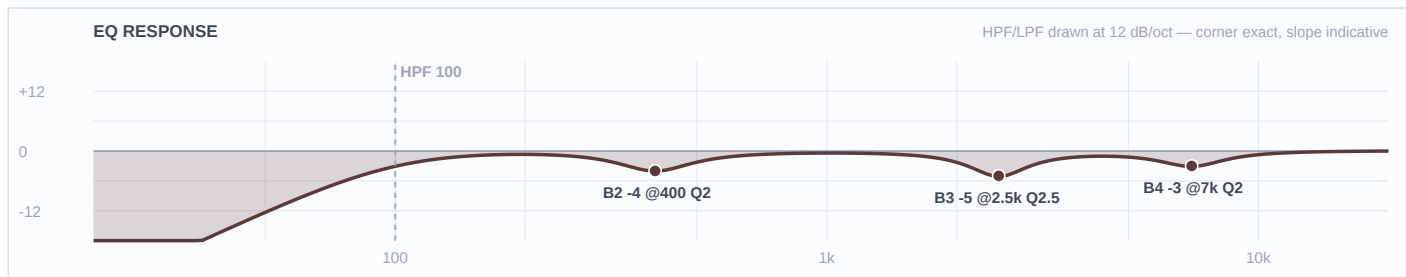

Mic Notes: Shared piezo channel — middle-ground piezo curve; not simultaneous with the dedicated mando/acoustic channels. Banjo (Banjo Hangout / HomeRecording): control 250 boom, 1-2 k honk, 4-6 k brightness when banjo is up.


Band	Freq	Type	Gain	Q	Notes / Rationale
LC	100 Hz	LC	—	—	High-pass
4	7 kHz	Bell	-3 dB	2	
3	2.5 kHz	Bell	-5 dB	2.5	
2	400 Hz	Bell	-4 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: Compromise piezo curve: -5@2.5k quack, -4@400 box, -3@7k brittle. Flag on the input list to match the active instrument at line check (esp. banjo's 250 boom cut). HPF 100.

■ VOCALS ■

Ch 33 | W1 Scott

Mic: Shure Beta 58A (wireless)

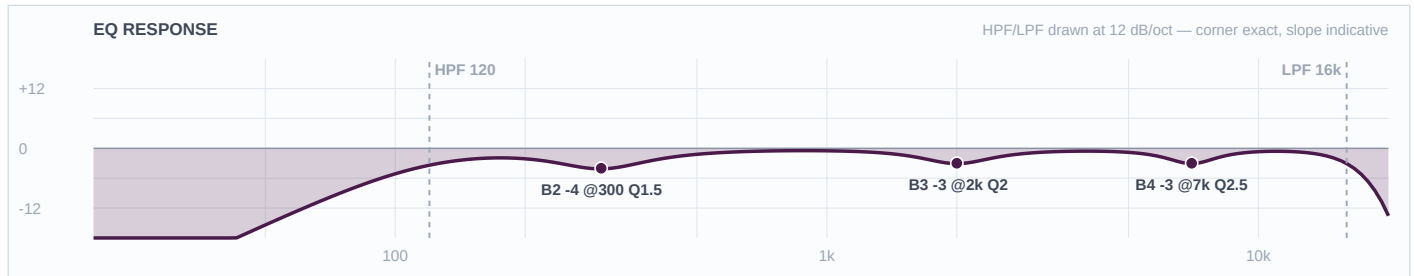


Mic Notes: Beta 58A — baked presence peaks ~4 k & ~10 k, <500 Hz attenuated (proximity-controlled), supercardioid/high GBF (MusicOnStage/Shure). Harmony voicing: rolled higher than the lead to sit behind it.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	120 Hz	LC	—	—	High-pass
4	7 kHz	Bell	-3 dB	2.5	
3	2 kHz	Bell	-3 dB	2	
2	300 Hz	Bell	-4 dB	1.5	
1	—	OFF	—	—	Flat
HC	16 kHz	HC	—	—	Low-pass

Engineer Notes: Cut-only. -4@300 trims mud so the harmony doesn't crowd the lead's body. -3@2k separates it from Matt's lead (own nasal lane). -3@7k tames the baked top for the humid evening. HPF 120 rolls it up under the lead. No boosts — the capsule bakes the presence.

Ch 34 | W2 Wabbs

Mic: Shure Beta 58A (wireless)

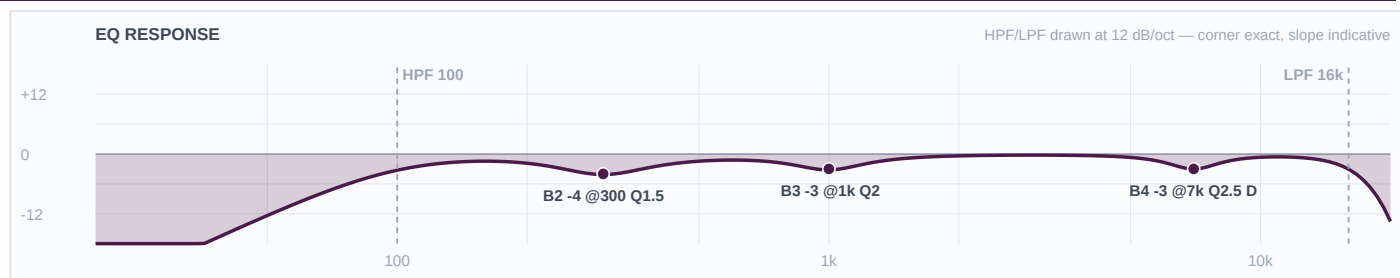


Mic Notes: Beta 58A — baked ~4 k & ~10 k peaks; brighter than an SM58, so the top can get strident on a hard lead. Dynamic de-ess sits on the baked top only when he leans in.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	100 Hz	LC	—	—	High-pass
4	7 kHz	Bell	-3 dB	2.5	DYNAMIC: thr=-18dB atk=3ms rel=120ms — bites only on peaks
3	1 kHz	Bell	-3 dB	2	
2	300 Hz	Bell	-4 dB	1.5	
1	—	OFF	—	—	Flat
HC	16 kHz	HC	—	—	Low-pass

Engineer Notes: Cut-only. Dynamic -3@7k (DEQ, thr -18) de-esses the baked top only on the loud consonants — the air stays between sibilants. -3@1k pulls honk; -4@300 mud for outdoor intelligibility. HPF 100 keeps the most low body of the four voices — he's the lead. No presence boost; the capsule bakes it.

Ch 35 | W3 Casey

Mic: Shure Beta 58A (wireless)

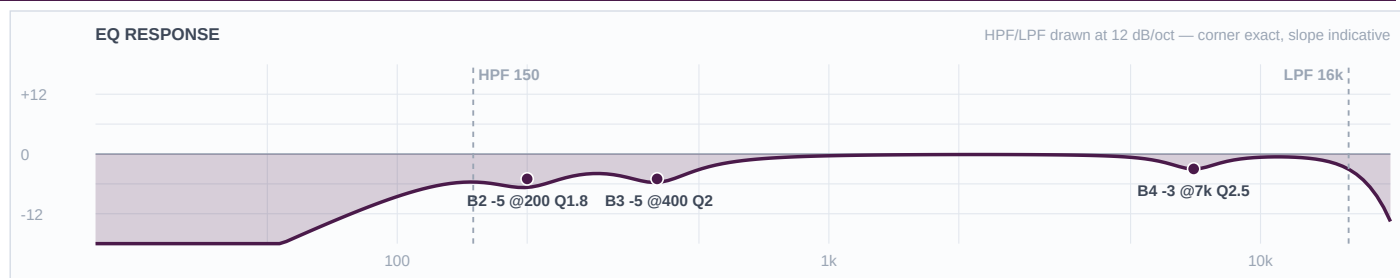


Mic Notes: Beta 58A at the drum throne — same baked ~4 k/10 k peaks, but the job here is stripping the kick/snare bleed that a kit vocal always carries.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	150 Hz	LC	—	—	High-pass
4	7 kHz	Bell	-3 dB	2.5	
3	400 Hz	Bell	-5 dB	2	
2	200 Hz	Bell	-5 dB	1.8	
1	—	OFF	—	—	Flat
HC	16 kHz	HC	—	—	Low-pass

Engineer Notes: Cut-only + tightest HPF of the four. HPF 150 dumps the kick/low bleed. -5@200 and -5@400 strip the snare/shell wash that leaks into a drummer's mic so his voice stays a voice, not a room mic. -3@7k de-ess. No boosts.

Ch 36 | W4 Bill

Mic: Shure Beta 58A (wireless)

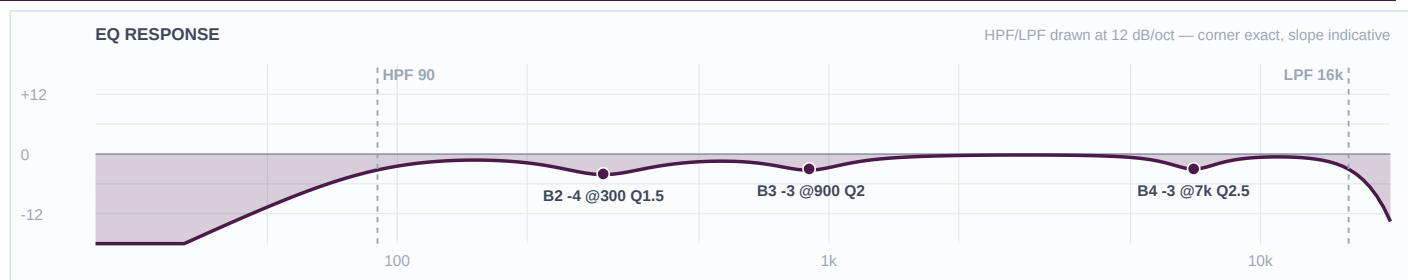

Mic Notes: Beta 58A — the <500 Hz roll is helpful on a low voice (keeps proximity in check) but HPF stays low so his register isn't thinned. Slotted low so the four-part stack has a real bottom.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	90 Hz	LC	—	—	High-pass
4	7 kHz	Bell	-3 dB	2.5	
3	900 Hz	Bell	-3 dB	2	
2	300 Hz	Bell	-4 dB	1.5	
1	—	OFF	—	—	Flat
HC	16 kHz	HC	—	—	Low-pass

Engineer Notes: Cut-only. HPF 90 — lowest of the four so his low harmony keeps its body. -4@300 mud; -3@900 honk; -3@7k de-ess. No boosts. Slots UNDER the other three voices by keeping the low end the others roll off.

Buffalo Wabs and the Price Hill Hustle — FOH EQ Rationale

Fountain Square (outdoor) · DiGiCo Quantum 225 · 2026-08-28 · Rev 2.1 Deep Think

THE ARTIST — AND WHAT IT MEANS FOR THIS MIX

Cincinnati four-piece Americana/roots-rock band (2016 CEA Best Folk/Americana). Matt Wabnitz 'Buffalo Wabs' — lead guitar + lead vocal; Scott Risner 'Kentucky Waterfall' — mandolin/resonator/tenor banjo + vocal; Casey Campbell 'The Deacon' — drums/percussion + vocal; Bill Baldock 'Bullseye Bill' — upright bass + vocal. All four sing (four-part harmony on the ballads). Sound moves from fast foot-stompers to harmony-laden ballads and labor dirges — Lead Belly/Prine/Guthrie roots pulled through modern rock/folk. Acoustic-forward stage (piezo strings + upright) driven by a real kit; the guests Joe Macheret (fiddle) and John K. Victor (harmonica) are NOT on this show. Mix priority: intelligible four-part harmony, clear acoustic pickers cutting the open air, a kick/snare that drives without going metal-rock.

THE ROOM — AND THE CONDITIONS ON THE NIGHT

Open-air Fountain Square — no room gain, so cuts run deeper than indoors (−6 to −9 typical, up to −10 on mud/box) and the low end is supported by the L-Acoustics KS21 subs rather than room reinforcement. Show window is warm-dry early (83°F/48% RH at 6pm) rising to humid by the main set (72°F/75% at 9pm, 82% by 11pm), wind light 4–8 mph, rain 1%. Humid-but-not-extreme: HF carries fine, so presence is protected and no aggressive HF boosts are used; the Beta 27 9 k fizz and Beta 58A baked top are trimmed rather than lifted. Casey sings from the kit, so the drum-mic patterns (i5 focus, D2/D4 hypercardioid, B27 supercardioid) were kept over any more-open Earthworks alternative for rejection.

What changed from the KB default / prior rev — and why

- REV 2.1: reverb section replaced with the actual return rig (SH Vocal Plate, CLA Epic Vocal 3, EchoBoy Hallway->SH Sunset Chamber, CLA Epic Acoustic Guitar Room, Atlas Big Drum Room) with per-return return-channel EQ researched to each preset voicing. Documentation only — the .ses is unchanged.
- REV 2 (revised input list 2026-08-28): string section reworked — dedicated Banjo channel dropped (5-string banjo now shares the doubling channel); old Electric Mandolin channel became a shared Electric Mandolin / Electric GUITAR channel (new cab-sim electric-guitar feed, treated as a mic'd cab, cuts-only + LPF 11k); resonator/acoustic/doubling renumbered. Drums, bass, overheads, vocals and wireless UNCHANGED — only the changed sources were re-researched.
- Overheads mapped to the FSQ STEREO fader 9 (both Beta 27s, one fader) — NOT split across 9/10; ch10 stays the protected SNARE PL8 reverb return.
- Four singers routed to house wireless 33–36 (Beta 58A); template Vocal faders 25–32 unused this show.
- Vocal wireless curves OVERRIDE the FSQ template stock wireless curve/notch — voice-slotted HPFs 100/120/150/90 (lead/harmony/at-kit/low).
- FSQ-deep cuts applied throughout (piezo quack −6, mud −6@250) vs a lighter indoor depth.
- Kick de-stacked across the two-mic pair — 91A owns 3.5k attack, 52 trimmed −2@4k; 52 owns +2@70 low, 91A flat low.
- Dynamics REASONED and documented in notes (COMP/GATE lines) but NOT patched into the .ses (Q225 build rule).

Question round — what was asked, what Brian decided

- REV 2: Brian supplied a revised input list — banjo dropped as a dedicated channel (folds into doubling), electric guitar added on the shared electric-mando channel. Per his instruction only the changed sources were re-researched.
- Date confirmed Fri 2026-08-28, FSQ (the Aug 13 listing is a separate Washington Park show).
- Vocals: all four members on house wireless 33–36, Beta 58A capsules; Vocal 25–32 unused (Brian confirmed).
- Guests: none — four-piece as listed, no fiddle/harmonica channel (Brian confirmed).
- Locker fork loop ran on every mic'd input; none raised — outdoor rejection with a singing drummer favors the specified kit mics over any Earthworks swap.

Reverb — Seventh Heaven Pro (100% wet returns)

- **VOCAL — Seventh Heaven Pro — Plates 1 / #06 Vocal Plate** | Settings: Decay 1.5s (factory) · PreDelay 24ms (factory) · VLF -19 (factory) · E/L Max Early · Late -6 (raised from the factory reference for outdoors) · Late Rolloff 6400 (factory) | In-plugin EQ: Return-channel EQ (Q225): HPF 200 · LPF 9k · B3 -3 @ 3.5k Q2 · B2 -3 @ 500 Q1.8 | Why: Lead + harmony-ballad plate. Its tail already rolls at 6.4k with a clean low (VLF -19), so it needs the least top-taming — LPF stays at 9k to keep the sheen that lifts the harmony; -3@3.5k stops it going strident when all four voices stack, -3@500 clears the dense-plate low-mid.
- **VOCAL — Waves CLA Epic — The Vocal 3 preset (plate + slap)** | Settings: CLA Epic lead-vocal preset (Chris Lord-Alge plate + slap/throw). Keep the preset plate time/pre-delay; set HF Damp so the slap repeats do not spit. Bright, forward lead verb. | In-plugin EQ: Return-channel EQ (Q225): HPF 220 · LPF 7.5k · B3 -4 @ 4k Q2 · B2 -3 @ 450 Q1.8 | Why: The brightest, most forward return in the set. Gets the hardest top pull (LPF 7.5k) and deepest de-harsh (-4@4k) or it turns edgy/sibilant outdoors in the humidity and the slap repeats spit; HPF 220 keeps those repeats articulate. Ring this one out at soundcheck — most feedback-prone.
- **VOCAL — Soundtoys EchoBoy Hallway (30% wet) → Seventh Heaven Pro — Chambers 1 / #17 Sunset Chamber** | Settings: Serial chain: EchoBoy Hallway at 30% wet feeding Sunset Chamber (Decay 2.15s factory · PreDelay 20ms factory · VLF -20 factory · E/L Max Early · Late -8 · Late Rolloff 7200 factory). Warm, dark, long — the big-moment/ballad return. | In-plugin EQ: Return-channel EQ (Q225): HPF 260 · LPF 10k · B3 -2 @ 3k Q2 · B2 -4 @ 350 Q1.6 | Why: Warm/dark and LONG (2.15s) with EchoBoy tape warmth ahead of it — already soft up top, so LPF stays gentle at 10k and the 3k cut is only -2 (over-darkening kills the bloom). The work is down low: highest HPF (260) + deepest mud cut (-4@350), because a long tail plus a serial tape stage is where this chain turns to soup on a busy number.
- **INSTRUMENT — Waves CLA Epic — Acoustic Guitar Room 1 preset** | Settings: CLA Epic room voiced for acoustic guitar — tight, present room. Glue for the acoustic pickers (mando/reso/banjo/acoustic). Keep the preset time short. | In-plugin EQ: Return-channel EQ (Q225): HPF 180 · LPF 8k · B3 -4 @ 2.5k Q2 · B2 -3 @ 400 Q1.8 | Why: Key move: -4@2.5k is the exact piezo-quack/metallic zone cut on every string source, so this room tail cannot re-energize what the channel EQ removed. CLA brightness plus banjo/reso metallic top is why LPF sits at 8k; HPF 180 lets a little instrument body bloom while blocking mud.
- **DRUM — Waves Atlas Reverb — Big Drum Room preset** | Settings: Atlas algorithmic large drum room. Big body + cymbal wash; consider trimming the program decay for the open-air mix. | In-plugin EQ: Return-channel EQ (Q225): HPF 160 · LPF 8k · B3 -3 @ 3k Q2 · B2 -4 @ 300 Q1.8 | Why: A big room signature problem is low-mid body and cymbal wash, both amplified by the size — HPF 160 keeps kick/floor tom out so punch stays dry, -4@300 carves the boxy room resonance a big algorithm piles up, -3@3k tames cymbal/hat wash before it smears the outdoor mix. Cuts-only — no snap boost outdoors.
- **USING THEM TOGETHER** — Five real returns. Three vocal returns hand off by song type: the Seventh Heaven Vocal Plate is the default forward lead + harmony bed; the CLA Epic Vocal 3 (bright plate+slap) is the up-front, aggressive option for a feature or a driving number; the EchoBoy->Sunset Chamber chain is the warm, long big-moment/ballad wash — ride it up only on the slow, spacious tunes and pull it under fast ones. The CLA Epic Acoustic Guitar Room glues the acoustic pickers (mandolin/resonator/banjo/acoustic) as a group; keep the upright out of it. The Atlas Big Drum Room sits under the kit — ride it up on the foot-stompers, off under ballads. All returns 100% wet, level ridden by the sends; return EQ per the plugin_eq lines (Q225 return-channel or the plugin own filter — same targets).

RESEARCH — WHAT WAS LOOKED UP, AND WHAT IT CHANGED

GENRE — VERIFIED FIRST, WITH NAMED EVIDENCE	THE GIG	CONDITIONS (FETCHED, NEVER ASSUMED)
Americana / roots-rock — verified against the band's own bio ('the timeless echoes of traditional Americana with the turbulent force of modern rock and folk'), their 2016 CEA Best Folk/Americana Band win, and WhizzBang/Purple Fiddle booking listings. Energetic foot-stompers + harmony-laden ballads; a string band WITH a real drum kit, so roots-ROCK, not delicate bluegrass.	Fountain Square, Fri 2026-08-28, evening set. Four-piece (no guests). Cincinnati hometown band.	Open-Meteo forecast pulled 2026-08-24 for the 8/28 show window: 6pm 83°F/48% RH, 8pm 75°F/69%, 9pm 72°F/75%, 11pm 70°F/82%; wind 4–8 mph; rain 1%. Warm-dry early, HUMID by the main set — below the 95% no-HF threshold, so: protect presence, no aggressive HF boosts, deep FSQ clarity cuts.

CH	SOURCE / MIC	WHAT THE RESEARCH FOUND	V	TRACE — base · equip · genre · artist · venue
1/2		Beta 91A boundary owns attack; Beta 52A capsule bakes a ~400 Hz scoop + ~60 Hz & ~4 kHz lifts (Shure two-mic-kick guide, Sweetwater). <i>Shure 'Two Shure Mics on Kick', Sweetwater, Gearspace</i>	AGREE	base 91A=attack/click, 52=bottom; split the lanes equip no kit sizes notated — generic kit, no change genre Americana kick = weight + moderate beater, not metal click — 91A top held to +3 artist foot-stomper energy — kept the beater present but not clicky venue FSQ outdoor — box cut deepened to -6@400; low left flat (52 bakes ~60, subs carry it)
3		Audix i5 bakes +5 dB @150 Hz and +9 dB @5.5 kHz, broad 3–8 k presence. <i>RecordingHacks, SoundOnSound, Barry Rudolph</i>	AGREE	base crack + body baked in → cut-only shaping equip no snare size notated — no change genre roots-rock snare wants crack that cuts — kept, not boosted artist energetic backbeat — ring controlled at 900, crack preserved venue FSQ outdoor — box -6@400; baked 5.5k softened -2@6k for humid air only
5		SM81 is a flat SDC with no baked hype — all shaping is subtractive spill control. <i>Shure SM81 datasheet, KB</i>	AGREE	base flat mic → cut spill, add nothing equip no change genre no change artist no change venue FSQ — HPF up to 200, -5@300 snare bleed, no air boost (humid carries HF)
6		Audix D2 voiced +150 body, 500 Hz–1 k DIP, upper-mid lift, hypercardioid 30 dB+ rejection. <i>Audix, Thomann, RecordingHacks</i>	AGREE	base mud pre-scooped → mid cut light equip one rack tom only — no change genre roots-rock tom attack wanted — +3@4k artist no change venue FSQ — attack lane split from floor tom; -3@450 kept light vs the baked dip
8		Audix D4 40 Hz–18 k, focused low-mid, punchy without mud, less LF boost than D2. <i>Audix, RecordingHacks</i>	AGREE	base real low extension → +2@90 body equip no change genre kit floor tom should ring — long gate release (doc) artist no change venue FSQ — box -5@350; attack +3@3.5k a notch below the rack's 4k
9		Beta 27 flat 60 Hz–3 k, +2 dB peaks @5.5 k & 9 k, supercardioid consistent <6.4 k; known 9 k fizz. <i>RecordingHacks, Shure, KB</i>	AGREE	base flat + supercardioid → cut-only spill/cymbal mic equip no change genre string-band OH = cymbals + stage wash, no boosts artist no change venue FSQ — HPF 300, -6@400 bleed box, -3@9k fizz worse in humidity

CH	SOURCE / MIC	WHAT THE RESEARCH FOUND	V	TRACE — base · equip · genre · artist · venue
11		Piezo/pickup upright through a passive DI — mud ~250 and honk ~800 are the problems; Whirlwind IMP adds no color. <i>TalkBass, Gollihur pickup guide, KB (Whirlwind IMP)</i>	AGREE	base pickup character only → clear mud/honk, keep fundamental equip passive DI, no active sparkle — +2@2.5k for pizz attack genre Americana upright = warm pizz, note clarity outdoors artist Bill's bottom is the band's foundation — low band flat venue FSQ — mud cut deepened to -6@250, HPF 35 preserves low E
13		Piezo mandolin quack centers 2.5–3 kHz; 400 box, 6–8 k brittle. <i>Premier Guitar, Mandolin Cafe, Gearspace piezo threads</i>	AGREE	base piezo quack primary target equip onboard pickup — no change genre bluegrass/Americana mando chop wants clarity not zing artist Scott's lead instrument — quack cut hard venue FSQ — quack -6@2.5k narrow, box -5@400, HPF 120
15		Shared electric-mando / electric-GUITAR channel. Electric guitar arrives as a cab-simulated XLR direct feed (Quilter/modeler) — amp-sim fizz lives 3-5 k and above 10-12 k; the IR bakes the cab voicing so it is treated as a mic'd cab, cuts only (REV 2 change). <i>Sweetwater amp-modeler FOH, Waves amp-sim EQ, HomeMusicCreator; KB capsule-gate-covers-cab-IRs</i>	THIN	base cab-sim direct = mic'd cab, IR bakes voicing → CUTS ONLY equip electric guitar modeler/cab-sim feed is the new element vs the old electric-mando-only channel genre Americana lead electric = warm/moderate gain, not metal — tame bark keep body artist Matt's lead electric shares the channel with a bright electric mando — middle-ground curve venue FSQ outdoor — LPF 11k for fizz, -3@3.5k harsh, -4@350 box, -2@1500 nasal; retune per active instrument
14		Resonator: metal-cone harshness at 3–4 k + piezo; forum standard cut ~250 Hz by ~6 dB. <i>Gearspace 'Taming Dobro Harshness', Banjo Hangout</i>	AGREE	base metallic bark + mud are the signatures equip reso onboard pickup — no change genre reso is a bright lead voice in Americana — tame, don't dull artist Scott doubles reso — bright but controlled venue FSQ — mud -6@250, metallic -5@3.5k, brittle -3@8k humid
17 (doubling)		Banjo piezo is bright + feedback-prone; EQ fix = 250 boom, 1–2 k honk, 4–6 k brightness. REV 2: the dedicated banjo channel was dropped — the 5-string banjo now shares the doubling channel, so this research applies there. <i>Banjo Hangout, HomeRecording banjo EQ</i>	AGREE	base bright/feedback-prone piezo equip 5-string banjo now on the shared doubling channel genre banjo ring wanted but controlled outdoors artist Scott's banjo — feedback margin matters at level venue FSQ — boom -5@250, honk -4@1.5k, brightness -3@5k when banjo is active
16/17		Piezo acoustic five-fix: 2.5–3 k quack primary, 400 box, 6–8 k brittle. <i>Fader&Knob, Premier Guitar acoustic-EQ series</i>	AGREE	base piezo quack primary equip onboard pickup — ch18 is a swap channel, retune per instrument genre Americana rhythm acoustic — clear, not scooped artist Matt's acoustic (16); Scott's doubling utility (17) venue FSQ — quack -6@2.8k, box -5@400, HPF 90/100
33–36		Beta 58A bakes presence peaks ~4 k & ~10 k, <500 Hz attenuated (proximity-controlled), brighter than SM58. <i>MusicOnStage 2026 analysis, Shure spec, higherhertz</i>	AGREE	base baked presence → CUTS ONLY, no vocal boosts (rule) equip house wireless handhelds genre four-part Americana harmony — slot by voice type, not hierarchy artist Matt lead / Scott harmony / Casey at-kit / Bill low — four distinct HPFs (100/120/150/90) venue FSQ — overrides template wireless curve; Casey tightest for kit bleed, deep mud cuts for outdoor intelligibility

Reconciliation — every web vs KB fork, and how it was settled

- No web↔KB disagreements — every unit AGREE except the shared electric-mando/electric-guitar channel (THIN: a cab-sim direct feed shared by two different instruments, no KB row for either, so the cuts-only middle-ground curve is a reasoned starting point to retune per the active instrument at line check).

KB write-back candidates — no article covers these yet

- Electric mandolin DI on a string-band show — candidate new mic-library/eq-starting-points note if the light curve lands.
- Beta 58A four-voice slotting by HPF (100/120/150/90) for an Americana harmony band — candidate eq-starting-points example.

DRUMS

Ch 1 | Kick In · Shure Beta 91A

HPF 35 | LPF off || B4 +3@3.5 kHz Q1.2 BELL B3 -6@400 Hz Q2 BELL B2 flat B1 flat

Beta 91A boundary INSIDE the kick — owns the ATTACK/click lane (Shure/Sweetwater: built-in contour switch tightens lows to complement the outside mic). GATE (doc only): Green/FET, thr ~-28, atk fast, keeps foot-stomp dynamics.

91A owns attack: +3@3.5k gives the beater snap the Americana kick needs (moderate, not metal-click). -6@400 kills the boxy shell boom the boundary picks up inside — FSQ-deep. Lows left flat here; the 52 owns bottom, so no low stacking across the pair. HPF 35.

Ch 2 | Kick Out · Shure Beta 52A

HPF 30 | LPF off || B4 -2@4 kHz Q2 BELL B3 -3@400 Hz Q2 BELL B2 flat B1 flat

Beta 52A — tailored kick capsule (Shure): baked scoop ~400 Hz + lifts ~60 Hz & ~4 kHz. Capsule gate: don't stack a full 400 cut (already scooped) or a 4k boost (91A owns attack).

52 owns the low weight — left FLAT: the capsule already bakes a ~60 Hz lift and the KS21 subs carry the bottom outdoors, so a boost here would stack on the voiced peak. -3@400 is LIGHT because the capsule already scoops there. -2@4k DE-STACKS from the 91A's 3.5k attack so the beater isn't doubled. HPF 30.

Ch 3 | Snare Top · Audix i5

HPF 80 | LPF off || B4 -2@6 kHz Q2 BELL B3 -3@900 Hz Q2.5 BELL B2 -6@400 Hz Q2 BELL B1 flat

Audix i5 — baked +5 dB @150 Hz (body) and +9 dB @5.5 kHz (crack), broad 3–8 kHz presence (RecordingHacks/SoundOnSound/Barry Rudolph). Capsule gate: crack is IN the mic → NO presence boost.

Cut-only shaping — the capsule already delivers body (150) and crack (5.5k). -6@400 clears the box for outdoor clarity (FSQ-deep); -3@900 tames snare ring; -2@6k just softens the baked-peak clang in the humid evening air while keeping the cut that lets it slice the open field. HPF 80 preserves the 150 body.

Ch 5 | Hat · Shure SM81

HPF 200 | LPF off || B4 flat B3 -3@3 kHz Q2 BELL B2 -5@300 Hz Q1.8 BELL B1 flat

SM81 — flat, honest SDC (Shure), no baked hype. Nothing to un-do; shape is all subtractive to remove kit spill.

HPF 200 — the hat has no useful lows and this dumps snare/kick spill. -5@300 kills the boxy snare bleed the mic picks up; -3@3k tames stick clang. No air boost — SM81 top is clean and the humid evening carries HF fine.

Ch 6 | Rack 1 · Audix D2

HPF 60 | LPF off || B4 +3@4 kHz Q1.5 BELL B3 -3@450 Hz Q2 BELL B2 flat B1 flat

Audix D2 — voiced for rack toms: +150 Hz body, a 500 Hz–1 kHz DIP, subtle upper-mid lift, fast transient, tight hypercardioid 30 dB+ off-axis rejection (Audix/Thomann/RecordingHacks). Capsule gate: mud already scooped → mid cut is LIGHT.

+3@4k gives the stick attack that lets the tom cut the outdoor mix (D2 owns this lane — floor tom's attack sits lower). -3@450 is deliberately light because the capsule already dips 500–1k; a full FSQ-deep cut would hollow it. Body left to the baked 150. HPF 60.

Ch 8 | Floor · Audix D4

HPF 45 | LPF off || B4 +3@3.5 kHz Q1.5 BELL B3 -5@350 Hz Q1.8 BELL B2 flat B1 +2@90 Hz Q1.2 BELL

Audix D4 — 40 Hz–18 k, focused low-mid, punchy low end without mud, less LF boost than the D2 (Audix/RecordingHacks). Handles 144 dB SPL.

+2@90 adds the floor weight the D4 extends to (subs carry it outdoors but the tom wants its own body). -5@350 clears the box. +3@3.5k gives stick definition a notch below the rack's 4k so the two toms occupy different attack lanes. HPF 45.

Ch 9 | Overheads · 2× Shure Beta 27

HPF 300 | LPF off || B4 -3@9 kHz Q2 BELL B3 -6@400 Hz Q2 BELL B2 flat B1 flat

Shure Beta 27 — flat 60 Hz–3 k, small +2 dB peaks at 5.5 k & 9 k, supercardioid consistent below 6.4 k (RecordingHacks/Shure). KB weakness: slight 9 k fizz on bright cymbals — the target here.

Cut-only — an OH pair on a string-band stage is a cymbal + spill mic, not a boost source. HPF 300 dumps kit lows and stage rumble. -3@9k tames the Beta 27's known fizz (worse in humid air). -6@400 kills snare/tom bleed box for outdoor separation. No air boost — supercardioid rejection is why these mics stay over an open stage.

RHYTHM

Ch 11 | Upright Bass · Whirlwind IMP (DI)

HPF 35 | LPF off || B4 +2@2.5 kHz Q2 BELL B3 -4@800 Hz Q2 BELL B2 -6@250 Hz Q2 BELL B1 flat

Whirlwind IMP — passive, honest DI (KB): no coloration, slight HF/level loss into low-Z. All character is the pickup; upright pizz through piezo = mud + honk to clear.

-6@250 is the main move — pickup mud that fogs pitch outdoors (FSQ-deep). -4@800 clears piezo honk. +2@2.5k adds the finger/pizz attack that carries note definition across the open field. HPF 35 keeps the low E (41 Hz) fundamental intact — this is the band's bottom, so the low band stays flat.

STRINGS

Ch 13 | Aco Mando · XLR (pickup DI)

HPF 120 | LPF off || B4 -3@7 kHz Q2 BELL B3 -6@2.5 kHz Q3 BELL B2 -5@400 Hz Q2 BELL B1 flat

Piezo/pickup mandolin — the 2.5-3 kHz quack is the signature problem, plus 400 box and 6-8 k brittle (Premier Guitar / Mandolin Cafe / Gearspace piezo threads).

-6@2.5k (narrow Q3) is the quack cut that does the heavy lifting - FSQ-deep for a piezo. -5@400 clears box. -3@7k tames brittle chop attack. HPF 120 (mandolin bottoms at G3 ~196 Hz). Cut-forward - piezo mandolin needs no boosts.

Ch 14 | Resonator · XLR (pickup DI)

HPF 90 | LPF off || B4 -3@8 kHz Q2 BELL B3 -5@3.5 kHz Q2 BELL B2 -6@250 Hz Q2 BELL B1 flat

Resonator = metal-bar-on-metal-cone harshness + piezo. Forum standard: cut ~250 Hz by ~6 dB, and the 3-4 k metallic harshness is the amplified-tone problem (Gearspace 'Taming Dobro Harshness' / Banjo Hangout).

-6@250 clears the mud/honk (per the dobro-live consensus, FSQ-deep). -5@3.5k tames the metallic bark that gets brutal amplified. -3@8k softens the brittle cone top in the humid air. Cut-only - the reso is bright by nature, nothing to add. HPF 90.

Ch 15 | Elec Mnd/Gtr · XLR (cab-sim direct)

HPF 95 | LPF 11000 || B4 -3@3.5 kHz Q2.5 BELL B3 -2@1.5 kHz Q2 BELL B2 -4@350 Hz Q2 BELL B1 flat

Cab-simulated XLR direct feed = treat as a MIC'D CAB — the IR already bakes the cab's presence/rolloff voicing, so CUTS ONLY, no boosts into the baked shaping (KB: capsule-gate-covers-cab-IRs). Amp-sim fizz lives 3-5 k + above 10-12 k (Sweetwater/Waves/HomeMusicCreator).

Cut-only, cab-sim treated as a mic'd cab. LPF 11k kills the digital top fizz of the direct feed. -3@3.5k tames the harsh presence bark that gets strident amplified outdoors; -4@350 clears cab-sim box; -2@1500 pulls nasal honk that suits both a bright electric mando and a lead electric. No boosts - the IR bakes the voicing. HPF 95.

Ch 16 | Acoustic Gtr · XLR (pickup DI)

HPF 90 | LPF off || B4 -3@7 kHz Q2 BELL B3 -6@2.8 kHz Q3 BELL B2 -5@400 Hz Q2 BELL B1 flat

Piezo acoustic — the classic five-fix (Fader&Knob / Premier Guitar): 2.5-3 k quack is primary, 400 box, 6-8 k brittle.

-6@2.8k narrow is the quack cut that makes a piezo sound like a guitar (FSQ-deep). -5@400 box; -3@7k brittle. Body left alone (DI is thin, no reason to cut it, no vocal-style boost). HPF 90.

Ch 17 | Mando/Bjo/Gtr · XLR (pickup DI)

HPF 100 | LPF off || B4 -3@7 kHz Q2 BELL B3 -5@2.5 kHz Q2.5 BELL B2 -4@400 Hz Q2 BELL B1 flat

Shared piezo channel — middle-ground piezo curve; not simultaneous with the dedicated mando/acoustic channels. Banjo (Banjo Hangout / HomeRecording): control 250 boom, 1-2 k honk, 4-6 k brightness when banjo is up.

Compromise piezo curve: -5@2.5k quack, -4@400 box, -3@7k brittle. Flag on the input list to match the active instrument at line check (esp. banjo's 250 boom cut). HPF 100.

VOCALS

Ch 33 | W1 Scott · Shure Beta 58A (wireless)

HPF 120 | LPF 16000 || B4 -3@7 kHz Q2.5 BELL B3 -3@2 kHz Q2 BELL B2 -4@300 Hz Q1.5 BELL B1 flat

Beta 58A — baked presence peaks ~4 k & ~10 k, <500 Hz attenuated (proximity-controlled), supercardioid/high GBF (MusicOnStage/Shure). Harmony voicing: rolled higher than the lead to sit behind it.

Cut-only. -4@300 trims mud so the harmony doesn't crowd the lead's body. -3@2k separates it from Matt's lead (own nasal lane). -3@7k tames the baked top for the humid evening. HPF 120 rolls it up under the lead. No boosts — the capsule bakes the presence.

Ch 34 | W2 Wabbs · Shure Beta 58A (wireless)

HPF 100 | LPF 16000 || B4 -3@7 kHz Q2.5 BELL +DEQ B3 -3@1 kHz Q2 BELL B2 -4@300 Hz Q1.5 BELL B1 flat

Beta 58A — baked ~4 k & ~10 k peaks; brighter than an SM58, so the top can get strident on a hard lead. Dynamic de-ess sits on the baked top only when he leans in.

Cut-only. Dynamic -3@7k (DEQ, thr -18) de-esses the baked top only on the loud consonants — the air stays between sibilants. -3@1k pulls honk; -4@300 mud for outdoor intelligibility. HPF 100 keeps the most low body of the four voices — he's the lead. No presence boost; the capsule bakes it.

Ch 35 | W3 Casey · Shure Beta 58A (wireless)

HPF 150 | LPF 16000 || B4 -3@7 kHz Q2.5 BELL B3 -5@400 Hz Q2 BELL B2 -5@200 Hz Q1.8 BELL B1 flat

Beta 58A at the drum throne — same baked ~4 k/10 k peaks, but the job here is stripping the kick/snare bleed that a kit vocal always carries.

Cut-only + tightest HPF of the four. HPF 150 dumps the kick/low bleed. -5@200 and -5@400 strip the snare/shell wash that leaks into a drummer's mic so his voice stays a voice, not a room mic. -3@7k de-ess. No boosts.

Ch 36 | W4 Bill · Shure Beta 58A (wireless)

HPF 90 | LPF 16000 || B4 -3@7 kHz Q2.5 BELL B3 -3@900 Hz Q2 BELL B2 -4@300 Hz Q1.5 BELL B1 flat

Beta 58A — the <500 Hz roll is helpful on a low voice (keeps proximity in check) but HPF stays low so his register isn't thinned. Slotted low so the four-part stack has a real bottom.

Cut-only. HPF 90 — lowest of the four so his low harmony keeps its body. -4@300 mud; -3@900 honk; -3@7k de-ess. No boosts. Slots UNDER the other three voices by keeping the low end the others roll off.