

J Roddy Walston

FOH CHANNEL EQ SETUP — DiGiCo Quantum 225

Show	J Roddy Walston
Show Date	2026-08-07
Venue	Fountain Square (outdoor)
Console	DiGiCo Quantum 225
Channels	19
FOH Engineer	Brian Lloyd
Monitor Engineer	TBD
Show Time	7:00pm — Visit Cincy Friday Night Nationals (SET 2 of 2)
Rev	Rev 1.0 Deep Think

DOCUMENT CONTENTS

1. Cover Page — show, venue, and personnel
2. Input List — color-coded full channel patch sheet
3. Patching — AES and Local inputs sorted by port
4. EQ Setup — 19 channels for DiGiCo Quantum 225
5. Reference — EQ structure, pan guide, bus grouping, soundcheck order

SHOW STYLE: Piano-pounding rock and roll — Zeppelin heaviness over '50s rock and roll bones. Big drums, two guitars slotted against each other, barrelhouse piano, a shouter out front.

J Roddy Walston

VENUE: Fountain Square (outdoor)

DATE: 2026-08-07

REV: Rev 1.0 Deep Think

FOH: Brian Lloyd

MON: TBD

SHOW TIME: 7:00pm — Visit
Cincy Friday Night Nationals
(SET 2 of 2)

Ch	Instrument	Mic / DI	Patch	48V	Stand	Notes
■ DRUMS						
1	Kick In	Shure Beta 91A	Local 1	✓	Bar	Two-mic kick with CH2 — 91A inside on the batter. Same VCA, pan together, sum in mono and flip CH2 if thinner. Contour switch assumed FLAT. Same physical kit as the first band — this is a re-EQ, not a re-patch.
2	Kick Out	Shure Beta 52A	Local 2		Short	Two-mic kick with CH1 — 52A at the port. Same VCA, pan together, polarity-check in mono.
3	Snare Top	Audix i5	Local 3		Clip	Backline supplies BOTH a 6.5"x14" and a 5.5"x14" DW Collectors maple snare on two stands — a swap between bands is set up for. Confirm which is up. Gate light or not at all.
4	Snare Btm	Sennheiser e604	Local 4		Clip	POLARITY FLIPPED against CH3 — set at soundcheck. Wires only.
5	Hat	Shure SM81	Local 5	✓	Boom	Cymbals are BAND-supplied and are this band's own, not the first band's — the backline quote states the rider does not request cymbals. LF filter assumed FLAT, pad assumed OUT.
6	Rack 1	Audix D2	Local 6		Clip	Backline ships ONE rack tom (10"D x 13"W on a DW9900 mount) — this is it. Template ships a native gate here: thr -36.2 dB, rel 227 ms, sidechain 217-262 Hz — suits a 13" rack, leave it.

Ch	Instrument	Mic / DI	Patch	48V	Stand	Notes
7	Rack 2	Audix D2	Local 7		Clip	NOT a second rack tom. The backline quote ships one 13" rack and TWO floor toms (14"x16" and 16"x18"), so this is the 16" FLOOR tom on legs, mic'd with a small/mid-tom mic. Built as a floor tom. Template ships a native gate here with a 153-242 Hz sidechain, tuned for a RACK tom. This is a 16" FLOOR tom — move the sidechain down toward 100-160 Hz at soundcheck.
8	Floor	Audix D4	Local 8		Clip	The 16"D x 18"W floor tom on three DW legs — the big one, and on this band the signature drum of every fill. Template ships a native gate here: thr -36.2 dB, rel 227 ms, sidechain 96-116 Hz — suits the 18" floor tom, leave it.
9	Overheads	Shure Beta 27 (matched pair)	Local 9	✓	Boom	STEREO channel — both OH mics on this one fader. Never split onto fader 10 (SNARE PL8 return). HPF switch assumed OUT, -15dB pad assumed OUT. THIS BAND'S OWN CYMBALS — the one drum source that genuinely changes at the break.

■ BASS

11	Bass DI	Whirlwind IMP 2 (DI)	Local 11		DI	Confirm at load-in whether the DI is pre-amp or off the SVT-CL's balanced out. Mono/polarity check against CH12.
12	Bass Mic	Shure SM57	Local 12		Short	LOCKER FORK RAISED — SM57 as specified vs Shure PG52; built to the sheet pending Brian. Confirm which cab is mic'd. Mono/polarity check against CH11.

■ GUITAR


Ch	Instrument	Mic / DI	Patch	48V	Stand	Notes
13	Guitar 1	Sennheiser e609 Silver	Local 13		—	e609 has no clip mount — hung over the cab face by its cable. Built for the TWIN (bright, scooped-mid, 85W). If the amps land the other way round at load-in, swap this card with CH14's.
14	Guitar 2	Electro-Voice N/D 408	Local 14		Short	Built for the BLUES DELUXE (40W, 1x12 Eminence, tweed-voiced). If the amps swap at load-in, swap this card with CH13's.
■ KEYS						
17	Key 1	Whirlwind IMP 2 (DI)	Local 17		DI	■ TOUR — confirm at load-in · Brian confirmed: keyboard and amp are on tour — this is NOT the touring upright piano. Artist-supplied (the backline quote's Keyboard line is a two-tier X-stand only, \$0.00).
18	Key Amp	Shure SM57	Local 18		Short	■ TOUR — confirm at load-in · Amp is artist-supplied and on tour — not on the backline quote. Confirm model at load-in. If it comes up harsh, move the mic off the cone centre before reaching for EQ.
■ VOCALS						
33	BGV 1	Shure Beta 58A (Wireless 1)	Wireless 1		—	House Wireless 1. TEMPLATE OVERRIDE — HPF overrides the template's 184Hz and writing B4 removes the -18dB @5024Hz Q20 feedback notch. RING OUT AT SOUNDCHECK.
34	Roddy 1	Shure Beta 58A (Wireless 2)	Wireless 2		—	House Wireless 2. Same singer as CH35, different position (Brian: '2 positions'). TEMPLATE OVERRIDE — HPF overrides 184Hz, B4 removes the -18 @5024 Q20 notch. RING OUT AT SOUNDCHECK.

Ch	Instrument	Mic / DI	Patch	48V	Stand	Notes
35	Roddy 2	Shure Beta 58A (Wireless 3)	Wireless 3		—	House Wireless 3. SAME SINGER as CH34 in a second position. TEMPLATE OVERRIDE — HPF overrides 184Hz, B4 removes the -18 @5024 Q20 notch. RING OUT AT SOUNDCHECK.
36	BGV 2	Shure Beta 58A (Wireless 4)	Wireless 4		—	House Wireless 4. TEMPLATE OVERRIDE — HPF overrides 184Hz, B4 removes the -18 @5024 Q20 notch. RING OUT AT SOUNDCHECK.

■ DRUMS ■

Ch 1 | Kick In

Mic: Shure Beta 91A

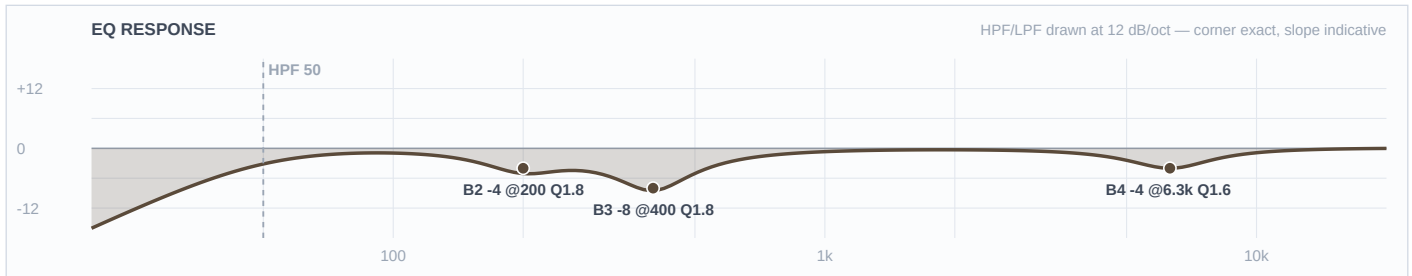


Mic Notes: Half-cardioid boundary inside the shell. Shure/RecordingHacks: the contour switch 'cuts 7dB at 400Hz' and the flat setting carries 'an emphasis from 4kHz to about 9kHz'. Known weakness is shell boxiness 300-500. SWITCH STATE: contour assumed FLAT — if you find it engaged, halve the desk cut to about -4. LANE: this mic owns the ATTACK, CH2 owns the BODY.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	50 Hz	LC	—	—	High-pass
4	6.3 kHz	Bell	-4 dB	1.6	
3	400 Hz	Bell	-8 dB	1.8	
2	200 Hz	Bell	-4 dB	1.8	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -4 @ 6300 takes one more dB off the baked attack than Bright Light got, because a Zeppelin-meets-'50s kick is felt rather than heard — the beater should be there without any of the click a modern rock mix would want. -8 @ 400 is the full FSQ depth on shell box. -4 @ 200 is held a dB shallower than the first band so the pair keeps a little more girth. HPF 50, ten lower than Bright Light, for the same reason.

Ch 2 | Kick Out

Mic: Shure Beta 52A

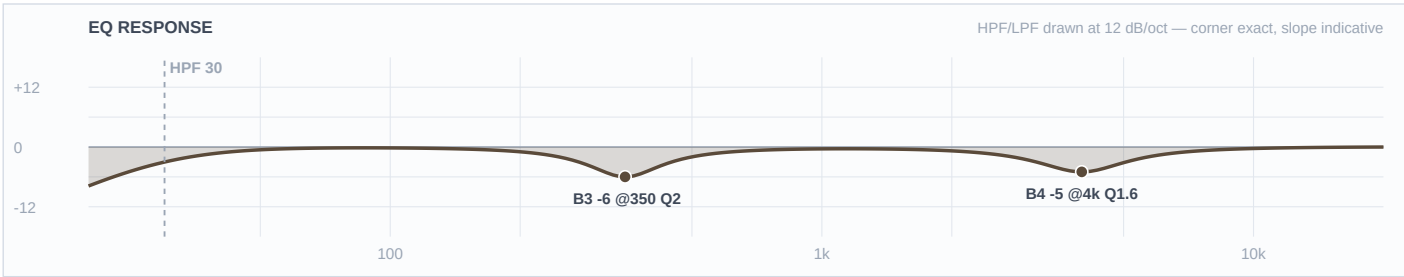


Mic Notes: Shure/DrumHelper/FrontEndAudio: 20Hz-10kHz with 'a low-Q, high-end boost of about +7dB, reaching its peak around 4kHz', plus baked big lows and scooped low-mids. DE-STACK: that 4kHz peak is a SECOND attack emphasis on top of CH1's 4-9kHz — trimmed here so CH1 keeps the lane outright. No low bell: the 24" shell's ~75Hz fundamental sits inside the capsule's own big low end.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	30 Hz	LC	—	—	High-pass
4	4 kHz	Bell	-5 dB	1.6	
3	350 Hz	Bell	-6 dB	2	
2	—	OFF	—	—	Flat
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -5 @ 4000, a dB deeper than the first band, turns this into a pure weight channel — everything this band's kick needs at the top is already on CH1 and this drum's job is the floor. -6 @ 350 rather than -7, deliberately: the capsule has already scooped the low-mids, and on a show built around drums that bloom, leaving that extra dB of body in is the difference between a big kick and a clean one. Nothing added at the bottom — the capsule plus the KS21 arch is the weight.

Ch 3 | Snare Top

Mic: Audix i5

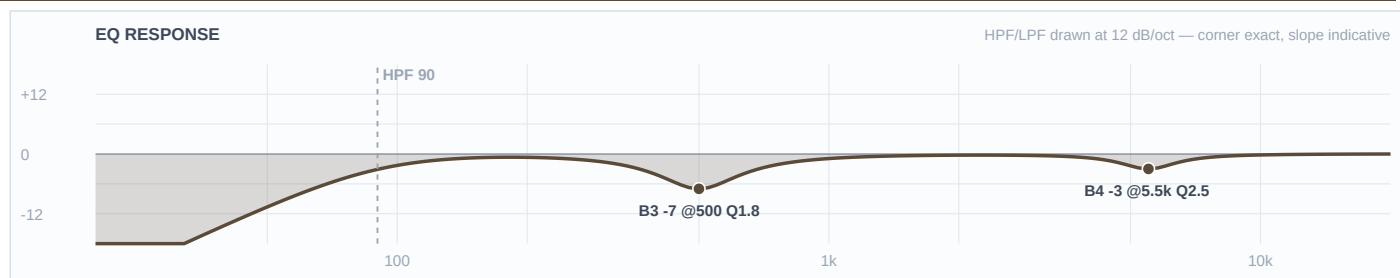


Mic Notes: RecordingHacks + KB agree exactly: 'a +5dB peak at 150 Hz and a pronounced +9dB peak at 5,500 Hz', 50Hz-16kHz, 140dB SPL. The crack is baked in, so 5.5k is a trim, never a boost. The 150Hz body lift is left alone rather than doubled with a low bell.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	90 Hz	LC	—	—	High-pass
4	5.5 kHz	Bell	-3 dB	2.5	
3	500 Hz	Bell	-7 dB	1.8	
2	—	OFF	—	—	Flat
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: This is the most important channel on the band and it is treated as such. -3 @ 5500 only — the minimum that keeps the capsule's +9dB from turning brittle in saturated air, because the crack IS the sound of a Zeppelin-lineage backbeat and I am not trading it away for politeness. -7 @ 500 rather than the -8 Bright Light got, leaving a dB more wood in the drum. The 150Hz body stays entirely untouched: fat and cracking is the brief, and everything on this channel is built around not undermining it.

Ch 4 | Snare Btm

Mic: Sennheiser e604

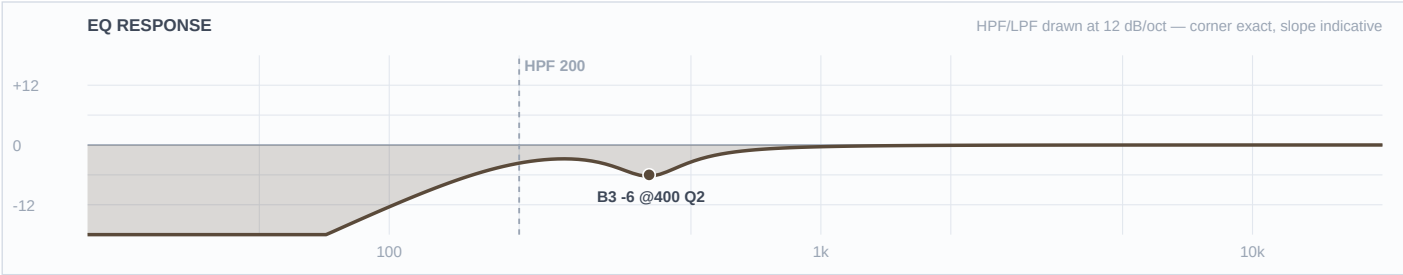


Mic Notes: RecordingHacks: 40-18,000Hz, proximity '+9dB @ 85Hz' at 5cm, 'High mids are emphasized, +3dB from 3-5kHz', flat through 15kHz. The wire detail comes from that 3-5kHz emphasis, so B4 stays flat.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	200 Hz	LC	—	—	High-pass
4	—	OFF	—	—	Flat
3	400 Hz	Bell	-6 dB	2	
2	—	OFF	—	—	Flat
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: HPF 200 — twenty lower than Bright Light, because a fat '50s snare wants some of the drum itself in the bottom mic rather than pure wire rattle. Still high enough to keep the capsule's +9dB proximity boom and the kick bleed out of the PA. -6 @ 400 clears the shell. No top-end lift: the rattle is in the capsule and at 92% RH it arrives whole.

Ch 5 | Hat

Mic: Shure SM81

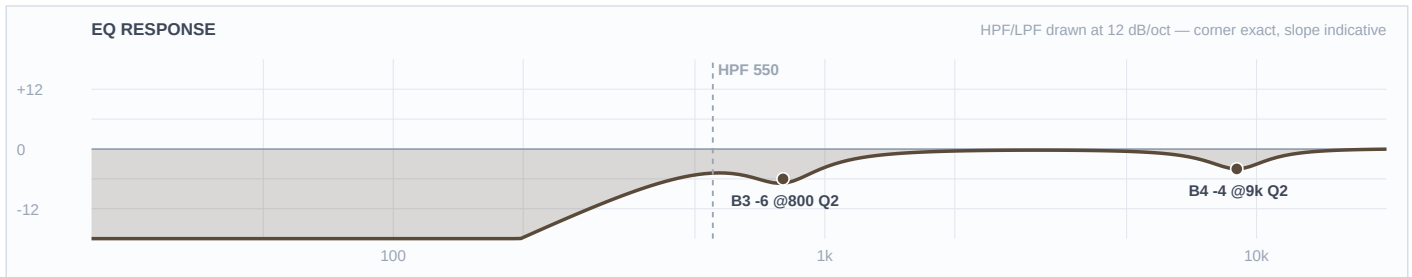


Mic Notes: Ruler-flat SDC — RecordingHacks/Shure: 20Hz-20kHz 'flat response curve', 146dB max SPL, 16.0dB(A) self-noise; soundref calls it 'one of the flattest-sounding cardioids ever made'. Nothing baked, so everything heard is the hat and the bleed.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	550 Hz	LC	—	—	High-pass
4	9 kHz	Bell	-4 dB	2	
3	800 Hz	Bell	-6 dB	2	
2	—	OFF	—	—	Flat
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -4 @ 9000, twice the trim Bright Light's hat got. Two reasons stack: this band's hat is looser and washier and belongs behind the kit rather than riding on top of it, and by this set the humidity is at 92-94% so the whole top end arrives intact. On a flat mic an air lift would normally be the one defensible boost — the weather is what removes the case for it. HPF 550 pushes the channel back further still; -6 @ 800 clears snare-bleed clank.

Ch 6 | Rack 1

Mic: Audix D2

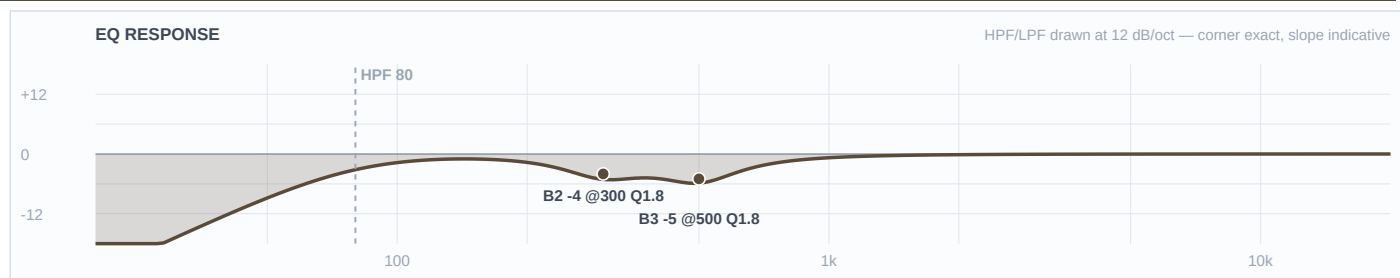


Mic Notes: RecordingHacks: 44-18,000Hz hypercardioid, 144dB, 'a scooped-mids EQ curve, with a larger low-frequency boost than the D4'. KB puts the bump at ~150Hz with a 500Hz-1kHz dip. A low bell at 150 was drafted and REMOVED — that is where the capsule's own boost sits.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	80 Hz	LC	—	—	High-pass
4	—	OFF	—	—	Flat
3	500 Hz	Bell	-5 dB	1.8	
2	300 Hz	Bell	-4 dB	1.8	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -5 @ 500 and -4 @ 300, both a dB shallower than Bright Light's. Zeppelin toms are the whole point of a fill and they need to bloom, so the mud cut here is the lightest on the kit — enough to keep the plaza from turning to soup, not enough to make the drum polite. HPF 80. Nothing added: on a 13" rack the D2's low bump already lands on the drum's fundamental.

Ch 7 | Rack 2

Mic: Audix D2

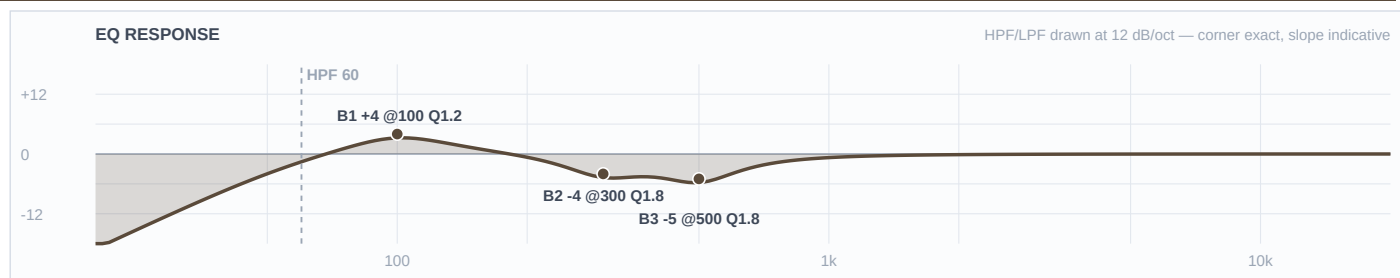


Mic Notes: Same D2 capsule as CH6 on a much bigger drum. The KB's flagged weakness — 'leaner deep lows than D4' — is the whole problem: a 16" floor tom's fundamental sits near 100Hz, BELOW the capsule's ~150Hz bump, on the falling side of the curve. That is what makes the low bell legitimate: it places weight where the mic runs out rather than reinforcing what it already does. The better mic is the D4, but there is one and the 18" has it.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	60 Hz	LC	—	—	High-pass
4	—	OFF	—	—	Flat
3	500 Hz	Bell	-5 dB	1.8	
2	300 Hz	Bell	-4 dB	1.8	
1	100 Hz	Bell	+4 dB	1.2	
HC	—	HC	—	—	No LPF

Engineer Notes: +4 @ 100 — a dB more than Bright Light's, and the only boost on this kit. It clears the capsule gate because 100Hz is below the D2's voiced region, and this band earns the extra dB: the toms carry the show. -5 and -4 on box and mud, both held shallow so the drum rings. HPF 60 to let the fundamental through.

Ch 8 | Floor

Mic: Audix D4

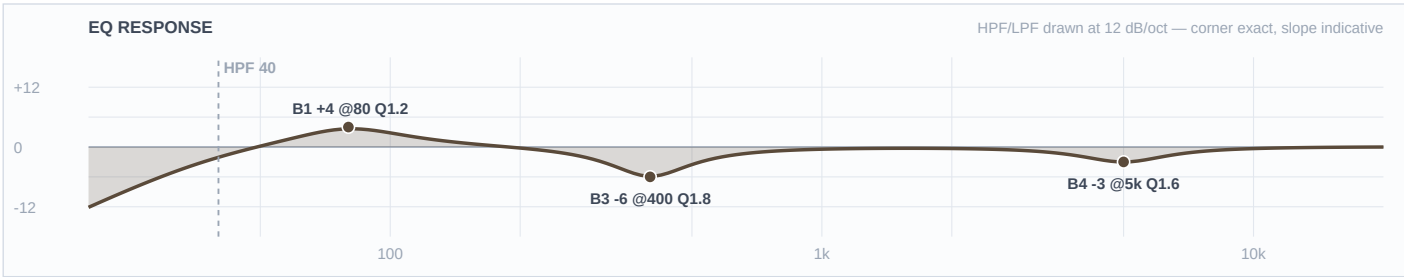


Mic Notes: RecordingHacks reading Audix's CURRENT chart: '+6dB at 5kHz' with 'a secondary peak above 10kHz' and 'a low-frequency rolloff below 70Hz'. The old spec showed something different, which is why the KB row was corrected in July — the trap is adding click at 5k straight onto a baked peak. The 80Hz bell is the KB's own instruction: 'restore weight ~80Hz rather than expecting sub reach'.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	40 Hz	LC	—	—	High-pass
4	5 kHz	Bell	-3 dB	1.6	
3	400 Hz	Bell	-6 dB	1.8	
2	—	OFF	—	—	Flat
1	80 Hz	Bell	+4 dB	1.2	
HC	—	HC	—	—	No LPF

Engineer Notes: +4 @ 80 puts the drum where a Bonham-lineage floor tom needs to be, sitting exactly where the fundamental meets the capsule's documented rolloff knee. -3 @ 5000 is the lightest touch I can get away with on the baked peak — enough to stop it stabbing in saturated air, not enough to kill the stick. -6 @ 400 rather than -7: this drum is allowed to boom on this band, which is the whole difference between the two sets. HPF 40.

Ch 9 | Overheads

Mic: Shure Beta 27 (matched pair)

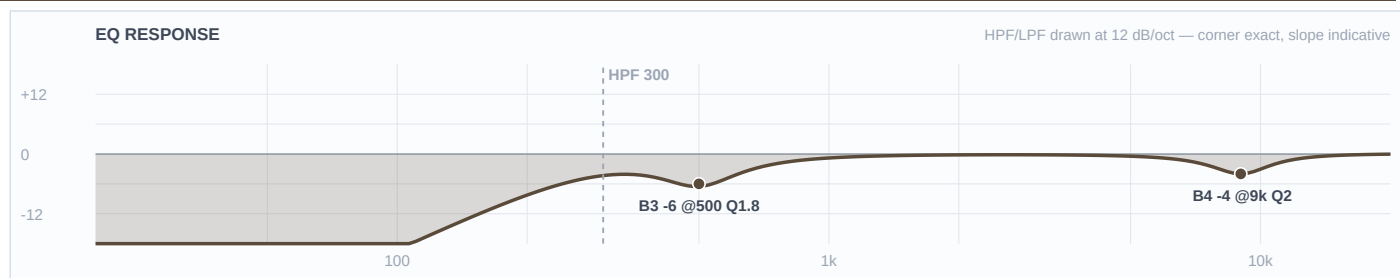

Mic Notes: RecordingHacks: flat 'from ~60Hz to 3kHz', two HF peaks of '+2dB or less' at 5500Hz and 9kHz, supercardioid 'extremely consistent below 6400Hz' with deep 120-degree nulls. Onboard HPF options (-6dB/oct @115Hz, -18dB/oct @80Hz) assumed OUT, so the 300Hz high-pass is the desk's.


Band	Freq	Type	Gain	Q	Notes / Rationale
LC	300 Hz	LC	—	—	High-pass
4	9 kHz	Bell	-4 dB	2	
3	500 Hz	Bell	-6 dB	1.8	
2	—	OFF	—	—	Flat
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: HPF 300 is set by the weather, not by taste — Open-Meteo has gusts at 19 mph and the overhead pair is the most wind-exposed input on the stage. -4 @ 9000, a dB deeper than the first band's, because Zeppelin-era cymbals are darker and washier by design and this set plays entirely in 92-94% humidity where none of the top gets absorbed on the way out. -6 @ 500 clears shell and stand wash, held shallow so the kit keeps the weight this band is built on.

■ BASS ■

Ch 11 | Bass DI

Mic: Whirlwind IMP 2 (DI)

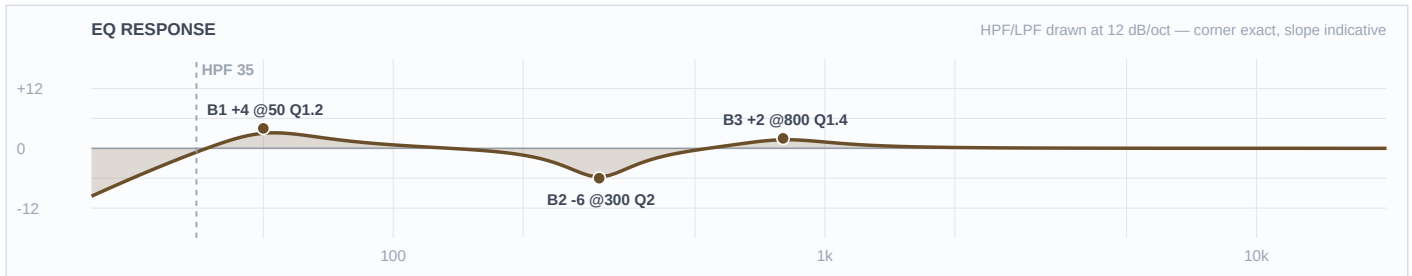


Mic Notes: Whirlwind/Sweetwater: '20Hz-20kHz ± 1 dB', -20dB loss, 133:1 ratio, TRHL transformer. Flat within a dB across the band, which is what clears both boosts — there is no baked peak anywhere for them to stack on. LANE: this channel owns everything below 140Hz; CH12 is high-passed at 140 and cannot reach it.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	35 Hz	LC	—	—	High-pass
4	—	OFF	—	—	Flat
3	800 Hz	Bell	+2 dB	1.4	
2	300 Hz	Bell	-6 dB	2	
1	50 Hz	Bell	+4 dB	1.2	
HC	—	HC	—	—	No LPF

Engineer Notes: +4 @ 50 — a dB more than the first band. Zeppelin bass is round and heavy and sits under everything, and the plaza has no room gain to help, so the weight has to be placed. Deliberately at 50 rather than 70-80 so it clears the 24" kick's ~75Hz fundamental instead of fighting it. +2 @ 800 only, half of Bright Light's, because this band wants less finger detail and more body. -6 @ 300, a dB shallower than the psych set, to keep the low-mid heft the style is built on.

Ch 12 | Bass Mic

Mic: Shure SM57

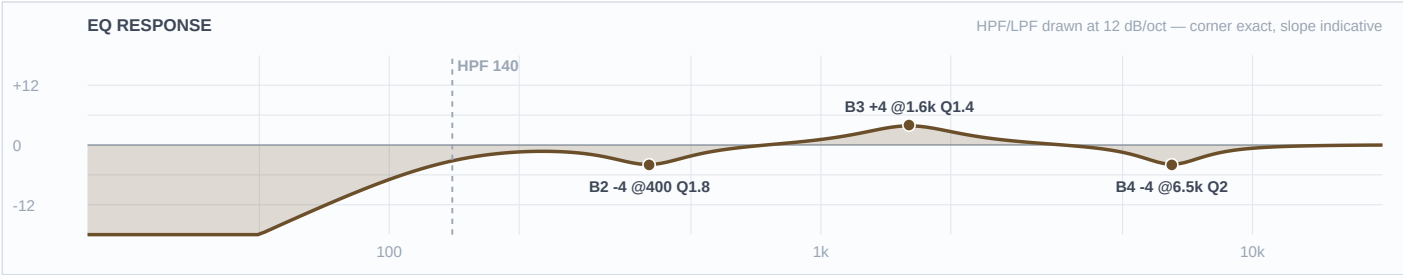


Mic Notes: Shure's published curve (user guide v3.6, 2025-A): presence peak 6-7kHz at +5 to +7dB — NOT 3-5kHz — via a ramp from ~2kHz that is only about +2dB by 3kHz; ~-10dB at 40Hz; small dip at 300-600Hz. The forums are unanimous this is a blend mic on bass: 'the SM57 has a low-end roll-off at about 200hz', and 'if you're just mic'ing, then use something else'. The 410HLF's 1" compression driver runs 'up to 4kHz'. LANE: grind only; CH11 owns the bottom.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	140 Hz	LC	—	—	High-pass
4	6.5 kHz	Bell	-4 dB	2	
3	1.6 kHz	Bell	+4 dB	1.4	
2	400 Hz	Bell	-4 dB	1.8	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: +4 @ 1600 is the biggest grind boost on either band, and it is the point of this channel — Zeppelin bass barks in the midrange, and that bark is what makes a riff band's low end audible outdoors rather than just felt. It sits on the flat part of the 57's ramp, well below the peak. HPF 140 keeps it out of the DI's territory entirely. -4 @ 6500 trims the baked peak before it fizzes. -4 @ 400 only, because Shure's own curve already dips through 300-600.

Ch 13 | Guitar 1

Mic: Sennheiser e609 Silver

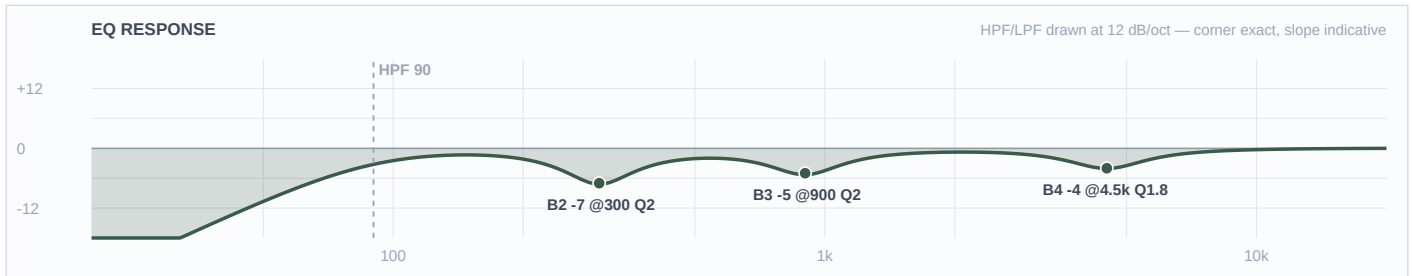

Mic Notes: Sennheiser spec 40Hz-15kHz supercardioid; SoundMaximum puts the voicing as 'a 3-6,000 Hz midrange peak', and the silver has a reputation for going 'thin, harsh, and brittle at times'. The KB reads that peak narrower (4-5kHz) — offered as a refinement rather than a silent divergence. The amp compounds it: the '65 Twin Reverb RI is 85W through two 12" Jensen C-12Ks with bright blackface voicing. TWO-GUITAR SLOT: this channel owns the TOP lane.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	90 Hz	LC	—	—	High-pass
4	4.5 kHz	Bell	-4 dB	1.8	
3	900 Hz	Bell	-5 dB	2	
2	300 Hz	Bell	-7 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: The two guitars are slotted against each other and this one takes the top. B4 sits at 4500 — higher than CH14's 3000 — so the bright Twin keeps the jangle that distinguishes it, trimmed -4 because the e609 peak plus a blackface amp plus 92% RH is three bright things in series. -5 @ 900 is the DEEPER of the two midrange cuts, deliberately, because the midrange belongs to CH14 and two guitars fighting for it is how a two-guitar band turns to mud. -7 @ 300 at full FSQ depth.

Ch 14 | Guitar 2

Mic: Electro-Voice N/D 408




Mic Notes: EV published spec: 30-22,000Hz supercardioid, the N/DYM structure 'provides 6-dB more output sensitivity over conventional designs', and the uniform pattern 'insures superior gain-before-feedback in live applications'. KB: brighter and more aggressive upper mids than an SM57, with a deliberate proximity lift and low-mid pile-up at close working distance. The amp is its opposite in the best way — the Blues Deluxe RI is tweed-voiced and reviewers call it 'the warmest, fullest, most tonally balanced, sparkly and spanky amp'. TWO-GUITAR SLOT: this channel owns the MIDRANGE lane.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	100 Hz	LC	—	—	High-pass
4	3 kHz	Bell	-5 dB	1.8	
3	900 Hz	Bell	-3 dB	2	
2	250 Hz	Bell	-6 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -3 @ 900 is the shallowest midrange cut on either band and it is the whole idea: this guitar keeps the midrange so the pair reads as two instruments instead of one wide one. -5 @ 3000 is the deepest presence trim of the show, earned by the 408's aggressive upper mids sitting on a mid-forward tweed amp — two forward voicings in series with saturated air behind them. -6 @ 250 goes after the low-mid pile-up the KB warns about at close working distance. Note there is no boost anywhere on either guitar: under a cuts-only-first rule the separation has to come from where each one is cut, and it does — 4500 vs 3000 up top, -5 vs -3 in the mids.

Ch 17 | Key 1

Mic: Whirlwind IMP 2 (DI)

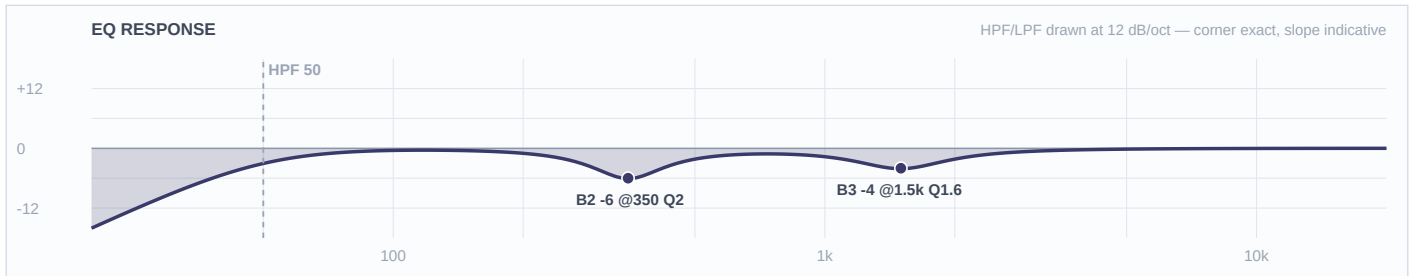


Mic Notes: IMP 2 is flat to ± 1 dB, so nothing here is the DI's doing — what arrives is a finished patch and the voicing decision was made upstream. Same posture as a cab-sim'd direct feed: cuts only. What governs this channel is the STYLE: barrelhouse piano is documented as percussive and hard-struck, with 'a pounding, train-like beat (walking figures, repeated basses, and chordal stomps)' in the left hand and many players using no pedal at all 'to keep the attack crisp and loud'.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	50 Hz	LC	—	—	High-pass
4	—	OFF	—	—	Flat
3	1.5 kHz	Bell	-4 dB	1.6	
2	350 Hz	Bell	-6 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: HPF 50 — the lowest of any keys channel across both bands, and the single most important number on this card. The left hand IS the engine of this style, and the reflex move of high-passing a keyboard at 70-90 to 'clean it up' would remove exactly what makes the band sound like the band. -6 @ 350 clears mud without going to full FSQ depth, for the same reason. -4 @ 1500 is real estate rather than tone: it opens a hole for the vocal that sits on top of it. B4 flat — the patch's top end is not mine to shape and at 92% RH it needs nothing.

Ch 18 | Key Amp

Mic: Shure SM57

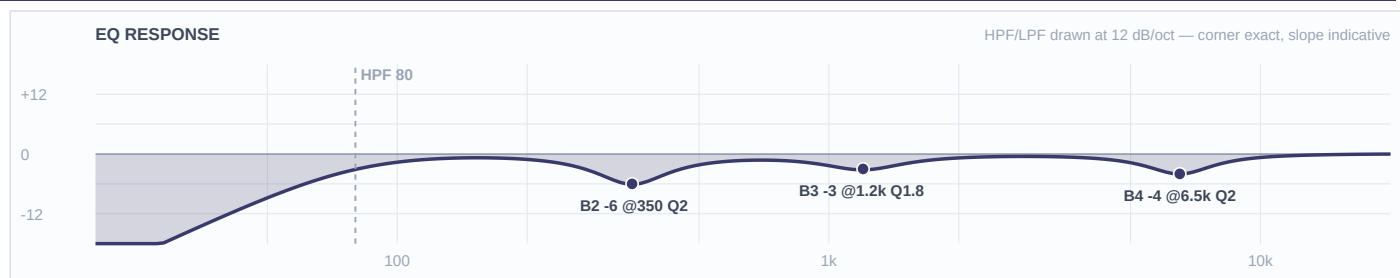

Mic Notes: Same corrected Shure curve as CH12 — 6-7kHz peak at +5 to +7dB, small dip at 300-600Hz. Amp model unknown, so placement is the first lever rather than EQ: the cone centre is 'the brightest, most aggressive sound with the most high-frequency content', the edge darker, and the standard fix for 3kHz harshness is moving off centre (Sweetwater / Dinosaur Rock Guitar).


Band	Freq	Type	Gain	Q	Notes / Rationale
LC	80 Hz	LC	—	—	High-pass
4	6.5 kHz	Bell	-4 dB	2	
3	1.2 kHz	Bell	-3 dB	1.8	
2	350 Hz	Bell	-6 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -3 @ 1200, against Bright Light's -5 on the same channel, and that gap is the genre call: the honk of an amped piano is the '50s rock-and-roll bark, the thing that makes it sound like a record instead of a keyboard, and cutting it out would be tidying away the point. -4 @ 6500 trims the 57's baked peak, which an already-bright amped patch in saturated air genuinely needs. -6 @ 350 held light for the capsule's own 300-600 dip. Between this and the DI: the DI carries the body and the stomp, the amp carries the bark — cuts at 1500 and 1200 respectively, so they are not digging the same hole.

■ VOCALS ■

Ch 33 | BGV 1

Mic: Shure Beta 58A (Wireless 1)

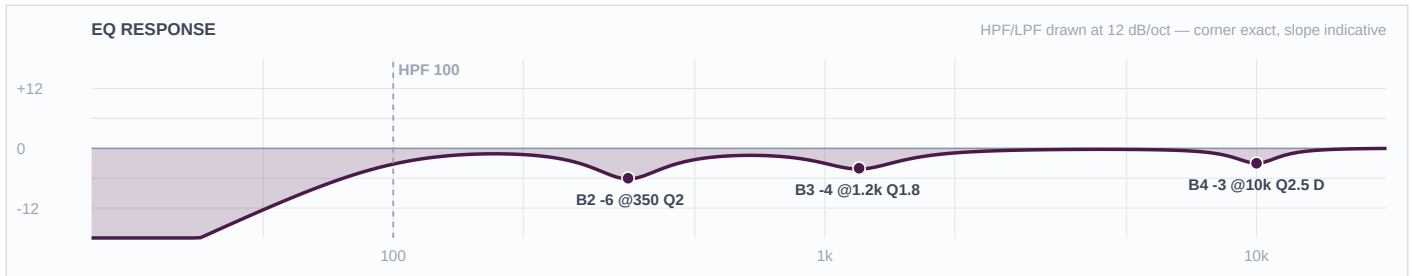


Mic Notes: Shure spec: 50-16,000Hz supercardioid, pattern held 'throughout its frequency range, which ensures high gain before feedback'. Music On Stage/HigherHz: 'two presence peaks at 4 kHz and 10 kHz', with the 4-9kHz presence 'significantly more aggressive than the SM58's'. Cuts only, every genre. SLOT: the BGVs are trimmed at the 10kHz peak, NOT the 4kHz one, so they stay out of Roddy's lane.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	100 Hz	LC	—	—	High-pass
4	10 kHz	Bell	-3 dB	2.5	DYNAMIC: thr=-18dB atk=3ms rel=120ms — bites only on peaks
3	1.2 kHz	Bell	-4 dB	1.8	
2	350 Hz	Bell	-6 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -3 @ 10000 with a dynamic de-esser takes the upper of the two baked peaks — which is the one that separates a backing voice from a lead without making it dull. Trimming at 4000 instead would have put this channel in exactly the lane Roddy occupies, and the two would have masked. -4 @ 1200 is its nasal lane, a full octave below BGV 2's, so the two harmonies don't blur into each other. HPF 100 and -6 @ 350 keep the stage out of an open wireless.

Ch 34 | Roddy 1

Mic: Shure Beta 58A (Wireless 2)

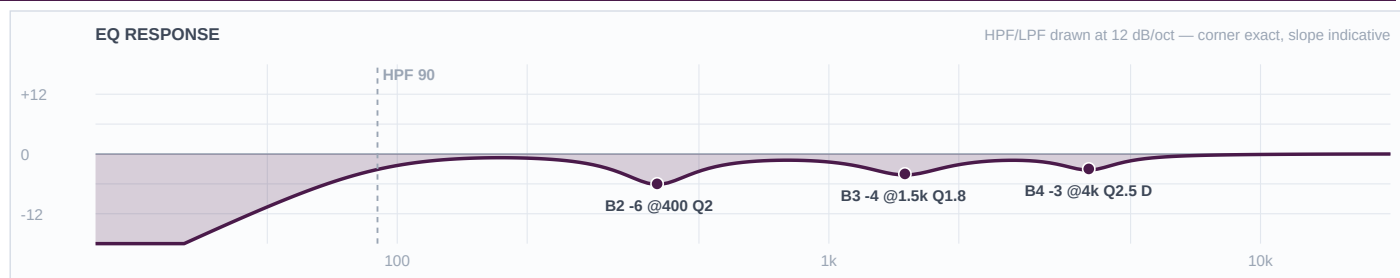


Mic Notes: Same Beta 58A capsule as the other three, with twin presence peaks at 4kHz and 10kHz. On a rock-and-roll shouter the 4kHz peak and the voice land on top of each other, which makes it the harshest single thing in this band's mix and the primary control point on the channel. The template's 184Hz HPF is flatly wrong for a male rock voice and is overridden.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	90 Hz	LC	—	—	High-pass
4	4 kHz	Bell	-3 dB	2.5	DYNAMIC: thr=-18dB atk=3ms rel=120ms — bites only on peaks
3	1.5 kHz	Bell	-4 dB	1.8	
2	400 Hz	Bell	-6 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -3 @ 4000 with a dynamic de-esser rather than a static cut — the humidity is climbing through this whole set, so a value dialled at the start is wrong by the end, and only a dynamic band tracks that. Placed at 4000 rather than the BGVs' 10000 because that is where this voice actually collides with the capsule. -4 @ 1500 and -6 @ 400 keep it intelligible over a loud band without touching the rasp. HPF 90 sits in the 60-100Hz range that suits a male voice — 94Hz of usable low end the template would have thrown away.

Ch 35 | Roddy 2

Mic: Shure Beta 58A (Wireless 3)

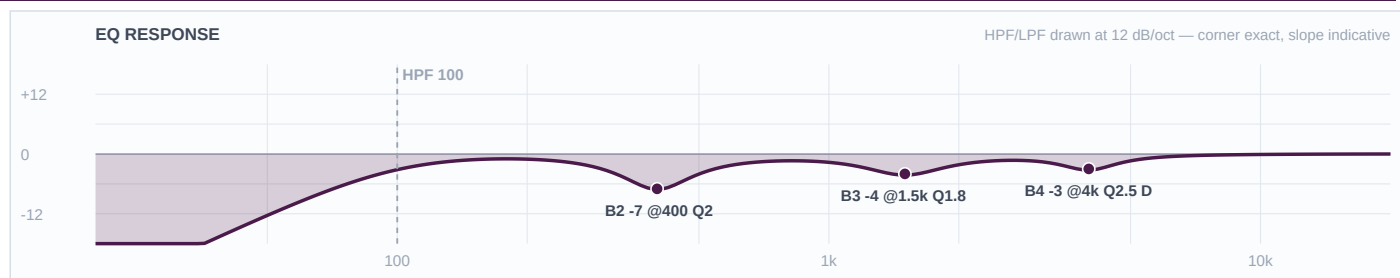


Mic Notes: Identical capsule and identical voice to CH34, so the tonal decisions are identical by design — slotting two mics on one singer apart would make him change character every time he moved. What differs is the SITUATION: a second-position mic is more open and further from its source, so it collects more stage and more low-mid even with the same capsule.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	100 Hz	LC	—	—	High-pass
4	4 kHz	Bell	-3 dB	2.5	DYNAMIC: thr=-18dB atk=3ms rel=120ms — bites only on peaks
3	1.5 kHz	Bell	-4 dB	1.8	
2	400 Hz	Bell	-7 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: Same curve as CH34 everywhere the voice is concerned — 4000, 1500, same de-esser — because it is the same voice and it has to sound like it. The only two numbers that move are the ones the position changes: HPF 100 instead of 90 and -7 @ 400 instead of -6, both buying back the extra stage an open second mic picks up. Getting this backwards, and slotting the two apart tonally, is the obvious trap here.

Ch 36 | BGV 2

Mic: Shure Beta 58A (Wireless 4)

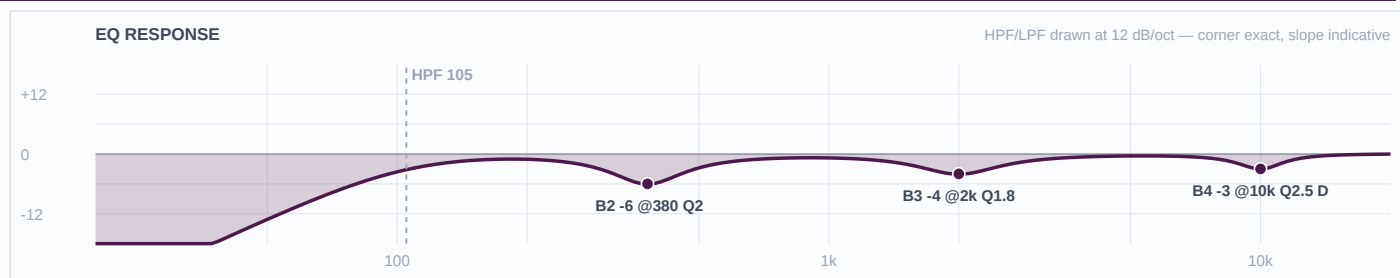

Mic Notes: Fourth Beta 58A, same twin peaks. Paired with CH33 as the backing layer — both trimmed at the 10kHz peak so neither is cut in Roddy's 4kHz lane, then separated from each other lower down.

Band	Freq	Type	Gain	Q	Notes / Rationale
LC	105 Hz	LC	—	—	High-pass
4	10 kHz	Bell	-3 dB	2.5	DYNAMIC: thr=-18dB atk=3ms rel=120ms — bites only on peaks
3	2 kHz	Bell	-4 dB	1.8	
2	380 Hz	Bell	-6 dB	2	
1	—	OFF	—	—	Flat
HC	—	HC	—	—	No LPF

Engineer Notes: -3 @ 10000 with a dynamic de-esser, matching BGV 1 so the two backing voices sit at the same distance behind the lead. -4 @ 2000 is what separates it from BGV 1 at 1200 — nearly an octave apart, which is what keeps two harmony parts from turning into one smeared one. HPF 105 and -6 @ 380 sit between the other three channels; four open wireless mics on an outdoor stage is a lot of gain, and every one of these is a cut for that reason.