


Tischler Glass Type #36

Dade County Standard Insulated Double Hung Low-E

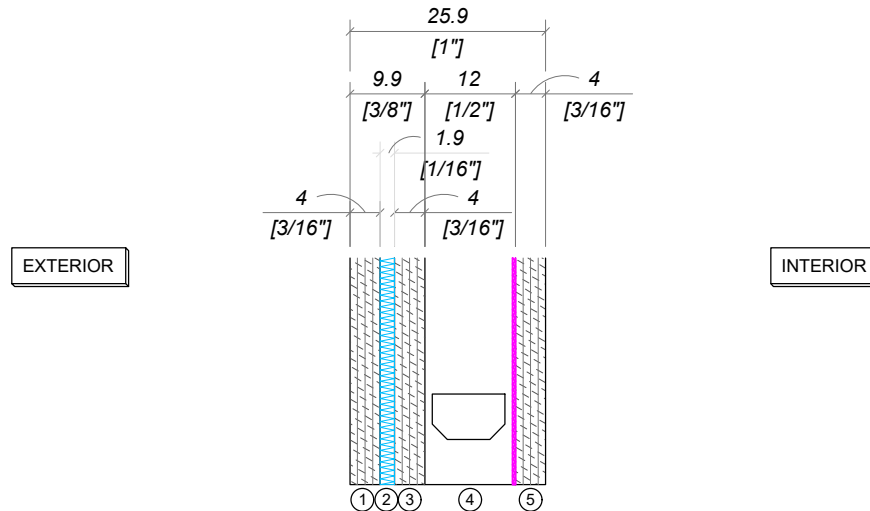

Glazing From External To Internal:

Pane 1

- | | | |
|---|----------------------------|---|
| ① | 4 mm (3/16") | Clear Annealed or Heat Strengthened Glass |
| ② | 1.9 mm interlayer (0.075") | Saflex VS02 (1,9mm) |
| ③ | 4 mm (3/16") | Clear Annealed or Heat Strengthened Glass |

Spacer

- ④ 12 mm (1/2") Air Space, 90% Argon Filled

Pane 2

- ⑤ 4 mm (3/16") Clear Annealed or Tempered Glass with Low-E Coating

Results:

Visible Light (NFRC 100-2010)

Daylight Transmittance

$$T_V = 80\%$$

Thermal Properties (NFRC 100-2010)

U-Value = 0.24

R-value = 4.14

Solar Energy (NFRC 100-2010)

Shading Coefficient $[q/0.87]$ = 0.65

SHGC = 0.57

Sound Reduction

STC = 37