



TISCHLER UND SOHN

Tischler und Sohn (U.S.A.) Limited

Six Suburban Avenue
Stamford, CT 06901 USA

Tel.: (203) 674-0600


Fax: (203) 674-0601

e-mail: info@tischlerwindows.com

Website: www.tischlerwindows.com

Tischler Glass Type #9

BR3 - Bullet Resistant (C2) - S
Low-E / Low-Iron

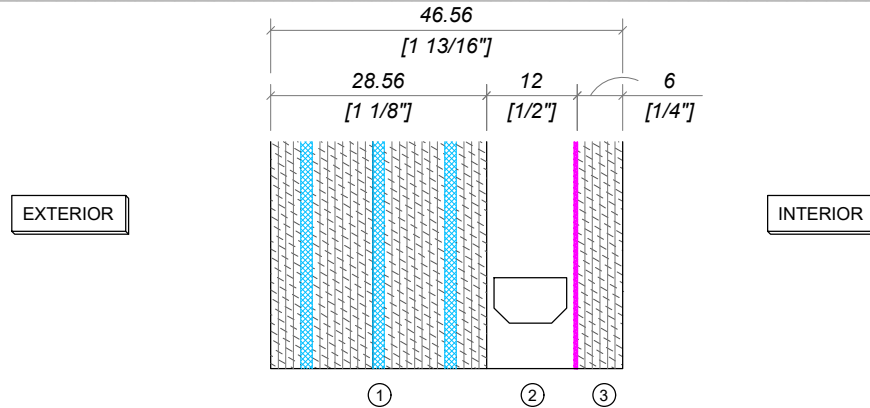

Glazing From External To Internal:

Pane 1

- | | | |
|---|-----------------|-------------------|
| ① | 4 mm (3/16") | Low Iron Annealed |
| | 1.52 mm (0.06") | PVB Interlayer |
| | 8 mm (5/16") | Low Iron Annealed |
| | 1.52 mm (0.06") | PVB Interlayer |
| | 8 mm (5/16") | Low Iron Annealed |
| | 1.52 mm (0.06") | PVB Interlayer |
| | 4 mm (3/16") | Low Iron Annealed |

Spacer

- | | | |
|---|--------------|-----------------------------|
| ② | 12 mm (1/2") | Air Space, 90% Argon Filled |
|---|--------------|-----------------------------|

Pane 2

- | | | |
|---|-------------|---|
| ③ | 6 mm (1/4") | Low Iron Annealed or Heat Strengthened Glass with Low-E Coating |
|---|-------------|---|

Results:

Visible Light (NFRC 100-2010)

Daylight Transmittance $T_V = 80\%$

Thermal Properties (NFRC 100-2010)

U-Value = 0.23

R-value = 4.37

Solar Energy (NFRC 100-2010)

Shading Coefficient [g/0.87] = 0.64

SHGC = 0.55

Sound Reduction

STC = 46