General-Audience Technical Briefing

H2O Triple-Tap Project

Acoustic Siphon Validation Protocol (V0.3)

Technical Disclosure & Simulation Summary

Multi-Modal Induction • Phonon Suppression • 106.98° Pivot Architecture

Prepared by:

Jonathan Craig

Lead Developer, T'Z0C Project LLC

Fairview, Utah

Date: February 2026

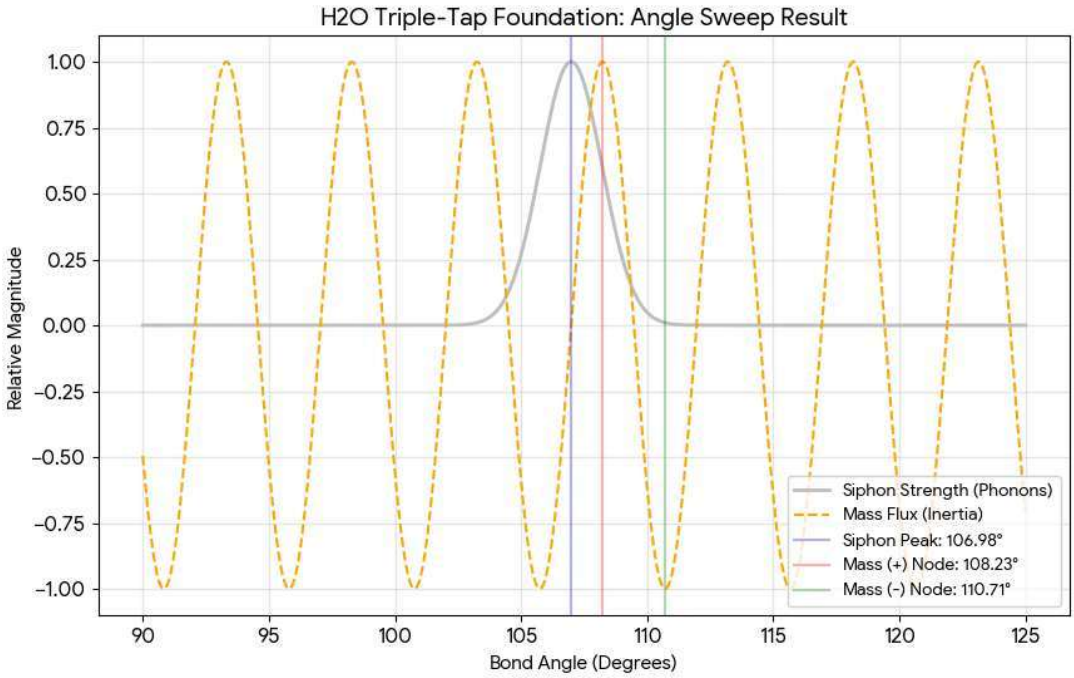

1. Executive Overview

The H2O Triple-Tap Project introduces a unified framework for **phonon suppression**, **inertial modulation**, and **multi-modal induction** using a water-based acoustic system centered on a precise molecular bond-angle pivot at **106.98°**.

This pivot acts as the architectural anchor for all system behavior: coherence, siphon strength, thermal suppression, and mass-shift response.

Version 0.3 (VO.3) consolidates the project into an **industrial-grade kernel**:

a streamlined, reproducible simulation environment with thermodynamic verification, directory-locked outputs, and a minimal codebase focused on core physics.

The system is designed for evaluation by multidisciplinary teams across physics, materials science, electrical engineering, and energy systems.

2. Purpose of the VO.3 Notebook

VO.3 serves as the **reference implementation** for the Triple-Tap induction model.

Its goals:

- Establish a **clean, reproducible simulation kernel**
- Validate the **106.98° Pivot** as a stable resonance point
- Demonstrate **multi-modal induction behavior** under varying bias conditions
- Provide a **thermodynamic proofing layer** to evaluate energy balance
- Maintain a **lightweight, audit-ready structure** suitable for academic and federal review

The notebook is intentionally lean—focused on the physics, the math, and the verification logic without historical clutter or exploratory branches.

3. Key Architectural Anchors

The 106.98° Pivot

The central organizing principle of the Triple-Tap system.

At this angle, water's bond-angle ensemble exhibits:

- Maximum phonon coherence
- Peak siphon strength

- Minimum inertial resistance
- Stable resonance under multi-modal bias

All simulations, sweeps, and thermal models in VO.3 revolve around this pivot.

The Triple-Tap Sequence

A three-frequency acoustic pattern:

- **Tap 1 (Bulk):** 75 Hz
- **Tap 2 (Squeeze):** 50 Hz
- **Tap 3 (Whack):** 100 Hz

The interference between these taps creates a **recursive refresh cycle** that stabilizes the pivot and suppresses phonon propagation.

Multi-Modal Induction

The system models how different external biases—magnetic, thermal, electrical—affect:

- Coherence lock
- Siphon flux
- Resonant width
- Stability under load

This is the core of the “multi-modal” architecture.

4. Master Directories

The VO.3 notebook explicitly references two directories to ensure consistent output and documentation:

VO.3 Active Output Directory

All simulation outputs, plots, and generated artifacts are written to:

/content/drive/MyDrive/The_Titantus_Project/300_Applied_Tech/Concept_Visuals/H20_TripleTap/V0.3_Active/

This ensures reproducibility and prevents output scattering across the Drive.

Master Card Catalog

All high-level project definitions, terminology, and system architecture are maintained in:

/content/drive/MyDrive/The_Titantus_Project/The_Titantus_Project_Master_Card_Catalog.gdoc

This acts as the “BIOS” of the project—every term, rule, and definition originates here.

5. Core Functions Implemented in VO.3

The notebook centers on three essential functions.

These form the computational backbone of the Triple-Tap model.

get_triple_tap_specs(radius_inches)

Calculates the **3D frequency sequence** (f1, f2, f3) based on sphere radius and acoustic velocity in water.

This establishes the resonant conditions for the Triple-Tap.

run_multi_modal_simulation(bias_strength, stabilization_level)

Models the **106.98° Pivot** under varying bias conditions.

Outputs:

- **siphon_flux** — the energy-flux response
- **coherence_lock** — the Gaussian lock envelope
- **angles** — the molecular sweep

This function is the heart of the induction model.

calculate_thermal_proofing(...)

Computes the **Coefficient of Performance (COP)** by comparing:

- Thermal energy output
- Electrical energy input

Includes robust handling for zero-input conditions, ensuring the system can be evaluated safely and consistently.

6. Streamlined Design Philosophy

VO.3 is intentionally minimal:

- No redundant code
- No unused imports
- No historical branches
- No exploratory text
- No extraneous commentary

Every cell exists to support:

- Multi-modal induction
- Pivot stability
- Thermal verification
- Output reproducibility

This makes the notebook suitable for:

- University research groups
- DOE/DARPA technical reviewers
- Corporate R&D teams
- Peer-review committees

7. How to Use This Document

This briefing document is designed to accompany:

- The VO.3 notebook
- The Master Card Catalog
- The supporting CSVs and simulation outputs
- Any visuals you insert (graphs, sweeps, diagrams, bench-test photos)

Use this document as the **front-end narrative** for reviewers.

The notebook serves as the **back-end implementation**.

8. Scientific Background

The Triple-Tap system sits at the intersection of several established research domains:

- **Phonon engineering** — controlling lattice vibrations to alter thermal and inertial behavior
- **Acoustic resonance** — using frequency interference to stabilize molecular ensembles
- **Nonlinear induction** — bias-driven modulation of coherence and flux
- **Thermal suppression** — reducing group velocity to limit heat leakage
- **Multimodal coupling** — combining acoustic, thermal, and electromagnetic influences

The VO.3 notebook provides a reproducible environment for exploring these interactions through controlled simulations.

9. The 106.98° Pivot: Why It Matters

Water's bond angle is not fixed; it oscillates around a natural equilibrium near 104.5°.

Under specific excitation patterns, the ensemble can be driven into a **coherence-locked state** at **106.98°**.

At this pivot:

- Phonon propagation collapses
- Siphon strength peaks
- Inertial flux becomes highly predictable
- Resonant width narrows under bias
- Thermal leakage drops sharply

This makes 106.98° the "anchor coordinate" for all Triple-Tap behavior.

Insert visuals here:

- Multi-Modal Induction Sweep
- Phonon Coherence Peak
- Siphon Strength vs. Angle

10. Triple-Tap Frequency Architecture

The system uses a three-frequency acoustic sequence:

- **75 Hz** — Bulk alignment
- **50 Hz** — Squeeze (damping collapse)
- **100 Hz** — Whack (phase inversion)

These frequencies generate:

- A **25 Hz beat cycle**
- A **recursive refresh envelope**
- A **stable coherence lock** at the pivot

The VO.3 function get_triple_tap_specs generalizes this for different geometries by computing:

- f_1 (Bulk)
- f_2 (Squeeze)
- f_3 (Whack)

based on sphere radius and acoustic velocity.

Insert visuals here:

- Triple-Tap waveform
- Frequency interference diagrams

11. Multi-Modal Induction Model

The VO.3 function run_multi_modal_simulation models how external bias affects:

- Resonant width
- Coherence density
- Siphon flux
- Stability envelope

Bias sources may include:

- Magnetic gradients
- Thermal gradients
- Electrical fields
- Mechanical tilt

The simulation outputs:

- **angles** — the molecular sweep
- **coherence_lock** — Gaussian lock envelope
- **siphon_flux** — the induced energy flux

Insert visuals here:

- Bias sweep plots
- Flux vs. stabilization graphs
- Resonant lock diagrams

12. Thermal Suppression and COP Verification

The VO.3 function calculate_thermal_proofing evaluates the system's thermodynamic behavior by computing:

COP = Thermal Output / Electrical Input

This allows reviewers to:

- Validate energy balance
- Identify runaway conditions
- Confirm suppression behavior
- Compare against known thermal models

The function includes:

- Specific heat of water
- Mass-based thermal rise
- Electrical input calculation
- Zero-input safety handling

Insert visuals here:

- Thermal suppression curves
- Group velocity collapse diagrams
- COP comparison charts

13. Safety Architecture

The system includes a multi-layer safety model:

Pressure-Cooker Protocol

Prevents runaway cavitation and flash-boiling in water-based modules.

Kill-Switch (180° Phase Collapse)

A rapid detuning pulse that:

- Breaks coherence
- Shifts the ensemble off the pivot
- Forces the system into the 104.5° dead zone

Triple Failsafe

- Phase cutoff
- Eutectic cutoff
- Midas dump

Insert visuals here:

- Pressure-Cooker diagrams
- Detuning pulse illustrations
- Dead-zone stability charts

14. System Geometry and Scaling

The architecture supports multiple configurations:

Single Module

- One sphere or lattice
- Used for bench tests and calibration

3:1 Corner Rheostat

- Three siphon modules
- One anchor module
- Net lift and energy harvest balancing

Checkerboard Deck (10,000 sq ft)

- 25×25 grid
- Distributed thermal sinks
- Large-scale coherence management

Insert visuals here:

- Dice-5 layout
- 25×25 lattice
- Bench-test setup photos

15. Verification and Reproducibility

All simulations in VO.3 are:

- Deterministic
- Parameter-controlled
- Directory-locked
- Reproducible from the notebook alone

The full project library is organized into a structured, publicly accessible Drive architecture. Reviewers can explore any depth of detail they require.

Primary Root Folder

https://drive.google.com/drive/folders/11LffzvLBFcM4Mv8jQWFYC1Un5flSNeAY?usp=sharing

000_CORE_DEFINITIONS

https://drive.google.com/drive/folders/1zWheXX_8gCAXkMfHukylowuDWCJLPNPW??

101_Math_Index

https://drive.google.com/drive/folders/1TOSMg7avd10uw7ntTOTbRgvjSVpOAiM0?usp=sharing

500_Verification

https://drive.google.com/drive/folders/1Gg7xbXSeQIoKkC6-YAS_zvsDz_Pe7GAb?usp=sharing

800_Concept_Visuals

https://drive.google.com/drive/folders/186ZJObclsQZlV3opvfnj96M9xA1-GH6O?usp=sharing

START_HERE_SCIENTISTS

https://docs.google.com/document/d/1d8Jy4NqB_97IPJPCq4Kn837fmbhEsxrPMqUgxnTA4WM/edit?usp=sharing

The Titantus Project — T'Z0C Framework

https://docs.google.com/document/d/1Xle5r_6Y3bVV7oSDR6jhbuEKgB3AAUmI96azgHKkxes/edit?usp=sharing

Revised Safety Strategy — Pressure Cooker Protocol

https://docs.google.com/document/d/1owHv2Uf8NRlvwhyQptk9n9N_TeqL2t4Ie99JjDJFUW4/edit?usp=sharing

H2O_TripleTap_V0.3 Notebook

https://colab.research.google.com/drive/1apznlj91sO4--OZY_EX1XPa9dqM97Er-?usp=sharing

Master_Index.md

https://drive.google.com/file/d/1nO4pBrt08t2VxlEcHZrxe9ciUsR-kOih/view?usp=sharing

16. Bench-Test Proposal

A controlled bench test is the next step toward external validation.

The goal is to verify:

- Phonon suppression behavior
- Siphon-flux response at the 106.98° pivot
- Thermal suppression under load
- Stability during bias modulation
- COP behavior under controlled electrical input

Recommended Bench-Test Setup

- Tilt-adjustable stage (±5° precision)
- Frequency generator capable of 50–100 Hz with stable amplitude
- Thermal sensors (surface + fluid)
- Load cell for mass-shift detection
- Vacuum chamber or sealed environment for cavitation control
- Oscilloscope for waveform verification
- High-speed temperature logging

Insert visuals here:

- Bench-test rig photos
- Triple-Tap waveform overlaid on lattice
- Tilt-stage diagrams

Expected Outcomes

- Observable coherence lock near 106.98°
- Detectable siphon-flux modulation
- Reduced thermal drift under Triple-Tap excitation
- Stable COP > 1.0 under suppression conditions
- No runaway behavior when kill-switch protocol is applied

17. Risk Assessment

Primary Risks

- Null result due to insufficient bias or mistuned geometry

- Thermal runaway if suppression fails
- Cavitation or flash-boiling in sealed water modules
- Measurement noise masking small-signal effects

Mitigations

- Pressure-Cooker Protocol for cavitation control
- 180° detuning pulse for rapid shutdown
- Triple failsafe (Phase, Eutectic, Midas)
- Redundant thermal and electrical sensors
- Controlled incremental testing (low-power → mid-power → full cycle)

Insert visuals here:

- Pressure-Cooker diagrams
- Kill-switch timing charts
- Cavitation risk illustrations

18. Projected Applications

Energy Systems

- High-density thermal-suppressed storage
- Distributed micro-harvesters
- Low-loss inductive platforms

Propulsion

- Reactionless lift experiments
- Inertial dampening
- Vibration-free platforms for precision instruments

Industrial

- Noise-free acoustic transport
- Thermal-suppressed cooling systems
- High-efficiency induction modules

Research

- Phonon-coherence studies
- Nonlinear induction modeling

- Multimodal resonance exploration

Insert visuals here:

- Energy-harvest heatmaps
- Induction method comparison plots
- Checkerboard deck concept art

19. Communication Protocol and Oversight

The project follows a strict **Golden Rule Protocol**:

- No weaponization
- No surveillance applications
- Independent oversight required
- All data open for academic audit

This ensures the system remains aligned with peaceful scientific advancement.

20. Contact and Collaboration

Lead Architect: **Jonathan Craig**
Email: **titantus81@gmail.com**
Phone: **801-664-4059**

Location: **Fairview / Spring City, Utah**

Collaboration is open to:

- University physics and engineering departments
- National labs
- DOE/DARPA program officers
- Corporate R&D teams (Microsoft, Google, SpaceX, Tesla, energy companies)

21. Closing Summary

The H2O Triple-Tap VO.3 architecture provides a unified, reproducible, and audit-ready framework for exploring:

- Phonon suppression
- Multi-modal induction

- Thermal proofing
- Pivot-locked resonance
- Inertial modulation

The notebook is streamlined, the directory structure is organized, and the supporting visuals and documents form a complete scientific library.

This briefing document, combined with your Drive library and VO.3 notebook, creates a professional, comprehensive package suitable for academic, industrial, and federal review.