



SHEET 1 - CONTROLLER, SENSORS, DISPLAY

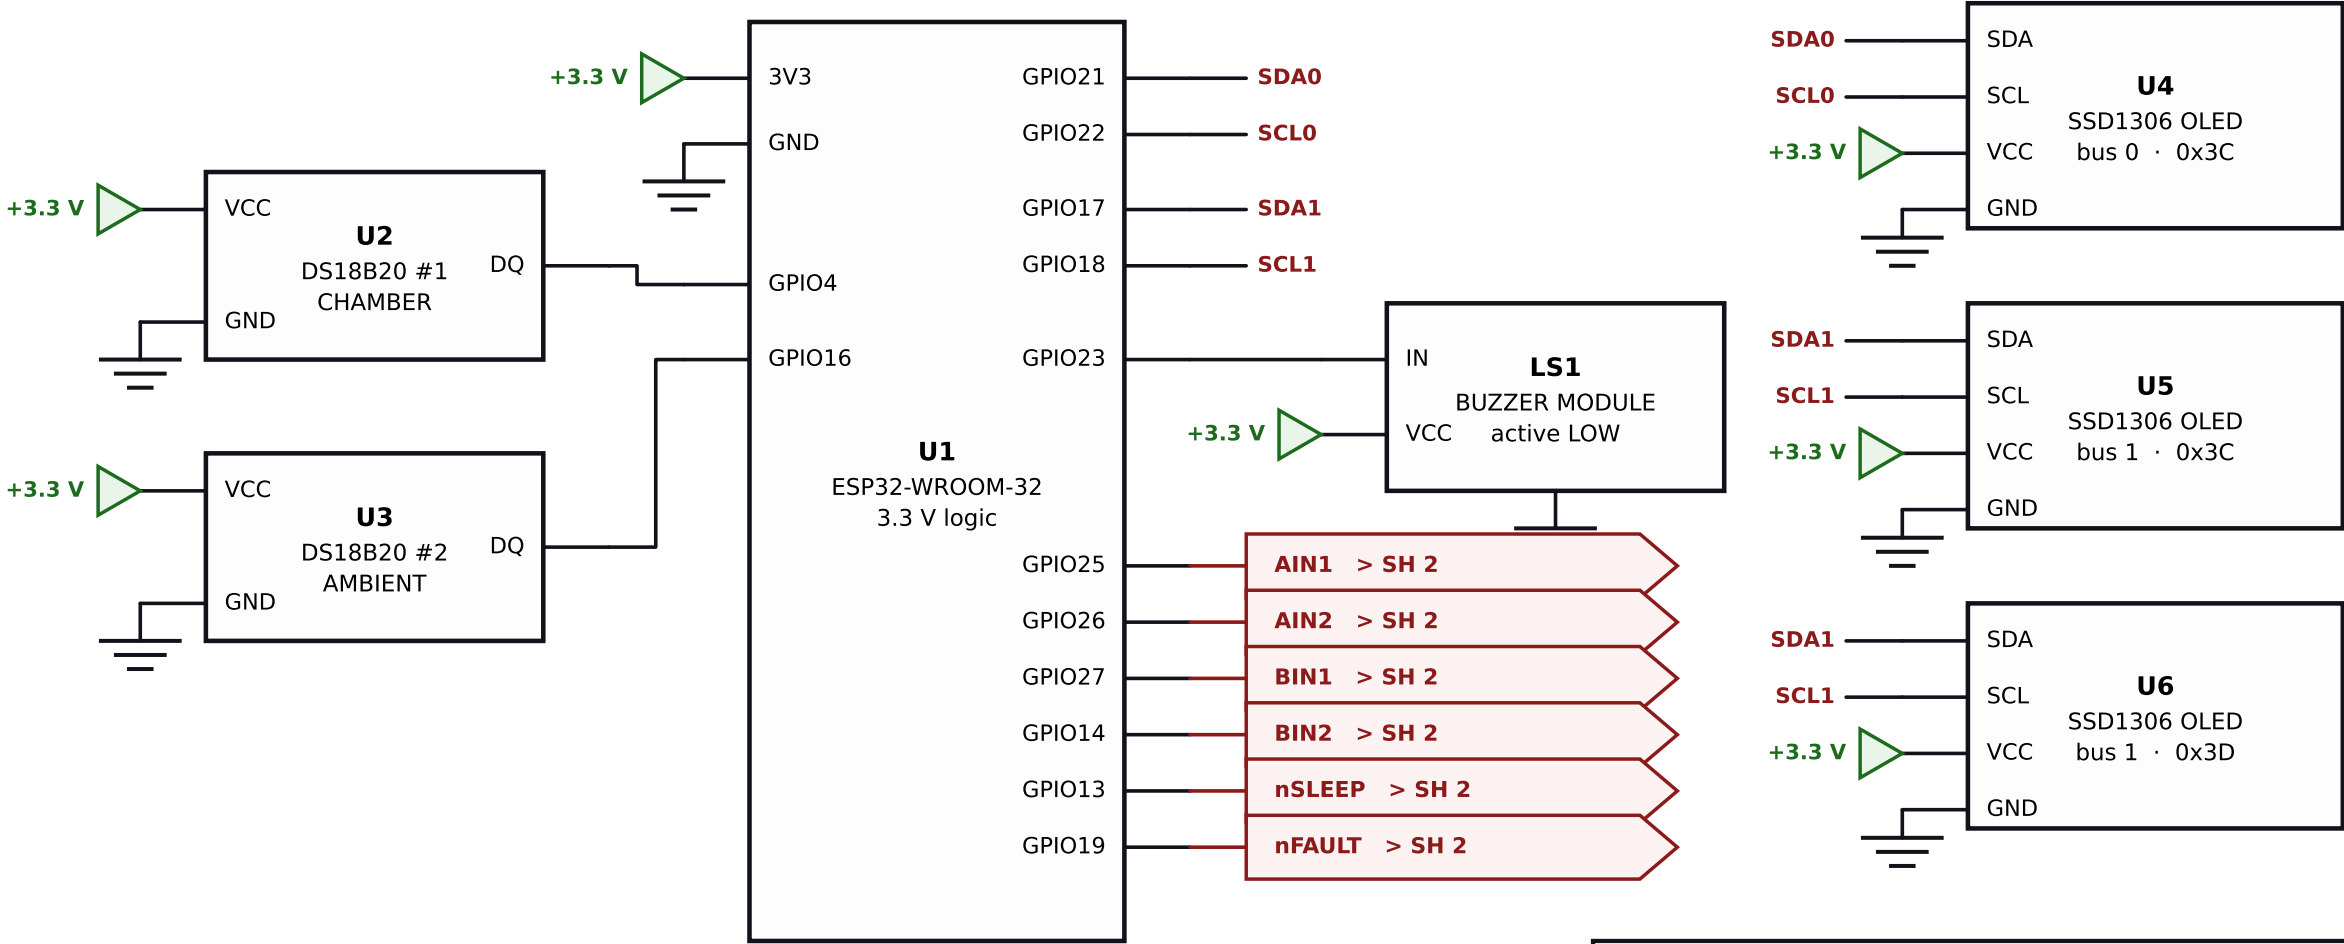

All grounds common. Every device is 3.3 V native, so there is no level shifter anywhere. Nets with the same name are connected. Each DS18B20 breakout carries its own 4.7 kΩ pull-up on DQ. OLED roles IN / OUT / STATE are assigned by the firmware at boot. The buzzer module sounds when its input is pulled LOW.

ESDL PROJECT 1 - WAREHOUSE VENTILATION		
Controller, Sensors, Display		
TJ / Tabitha	2026-09-30	REV B SH 1/2

SHEET 2 - FAN DRIVE AND POWER

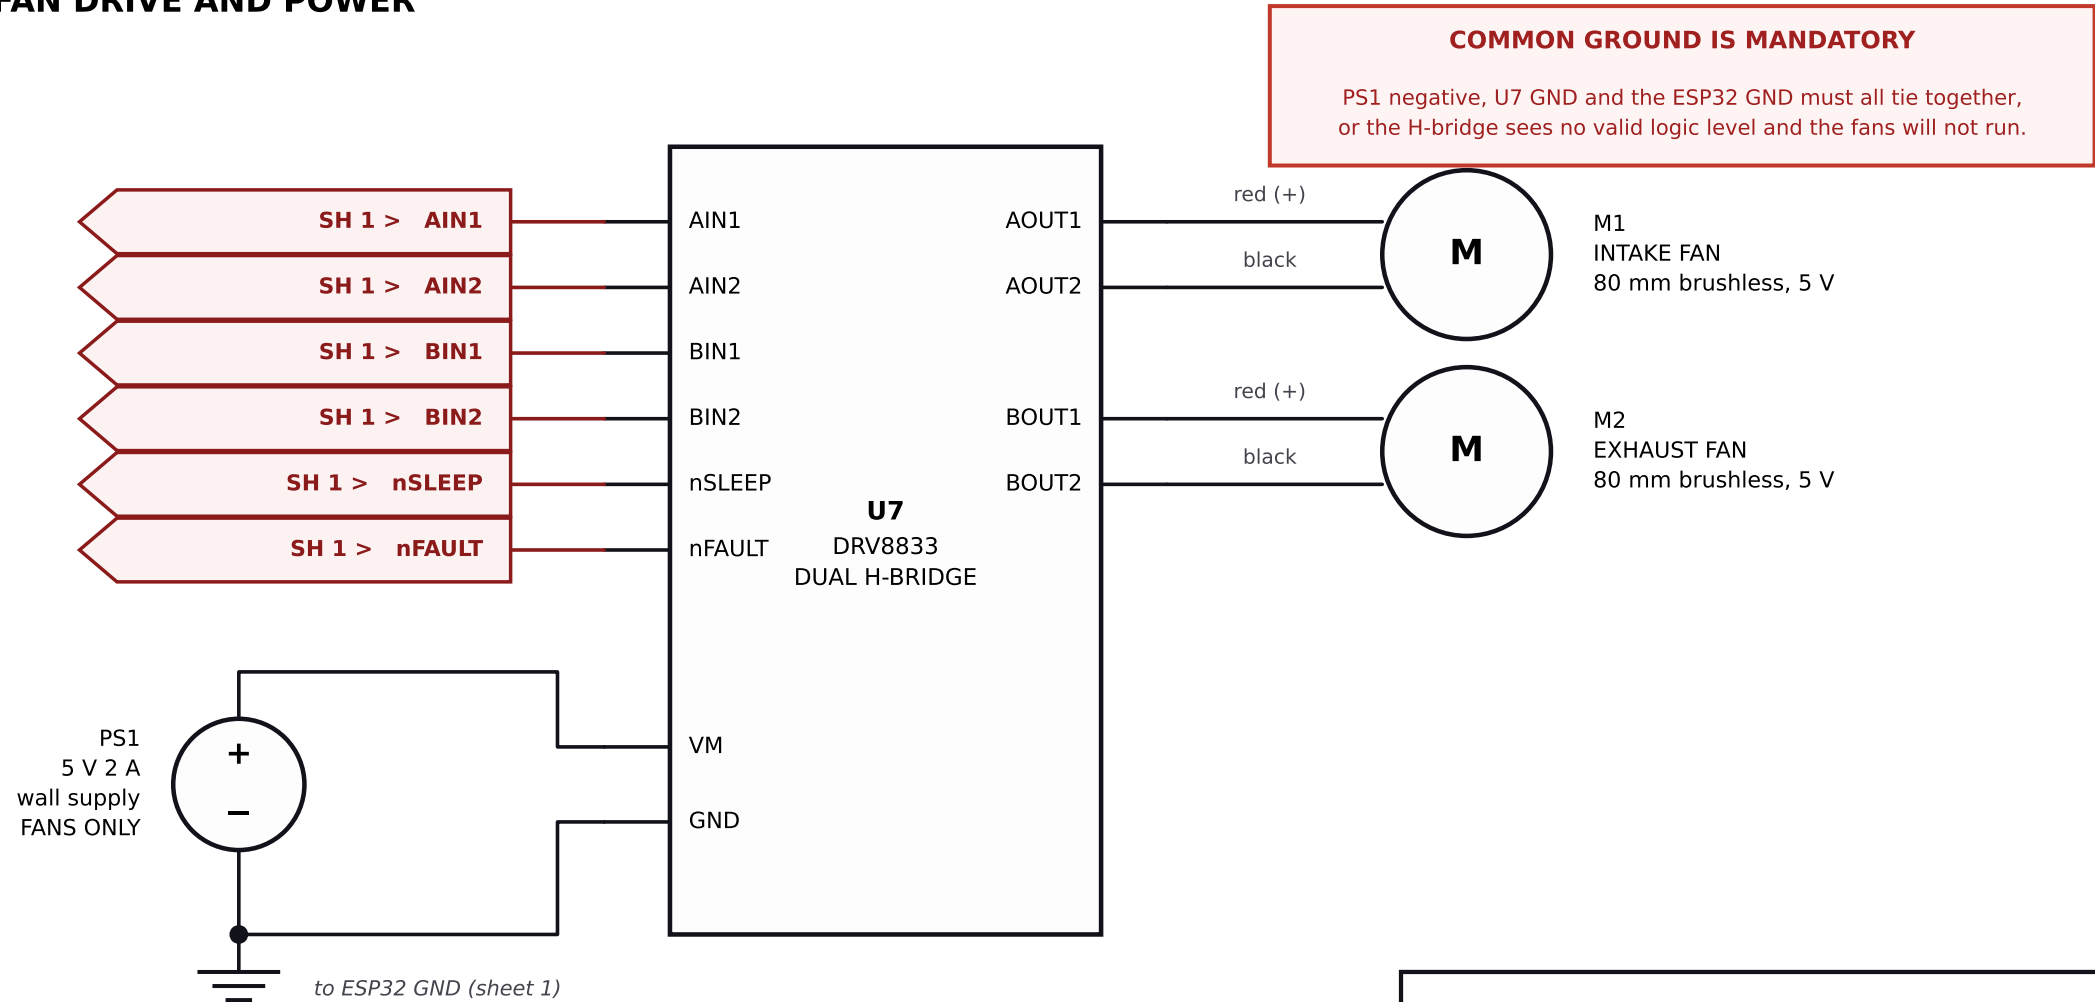

Fans are brushless and only ever switched one direction, so no suppression capacitors are fitted.
nSLEEP must be driven HIGH or the bridge stays off. nFAULT is open drain: GPIO 19 reads it through the internal pull-up.
Fan power never passes through the ESP32, which runs from USB.

ESDL PROJECT 1 - WAREHOUSE VENTILATION		
Fan Drive and Power		
TJ / Tabitha	2026-09-30	REV B SH 2/2