LegoLens: LEGO for the Microsoft Hololens

Thomas Nyegaard-Signori sfq340@alumni.ku.dk

Tobias Carlos Tvarno xgp298@alumni.ku.dk

Tor-Salve Dalsgaard mhb558@alumni.ku.dk

Enes Golic qzj710@alumni.ku.dk

ABSTRACT

This project set out to produce an Augmented Reality (AR) application using LEGO on the Microsoft Hololens. Using Unity and the open source toolkit produced by Microsoft called Holotoolkit a prototype was built. Furthermore, the application was tested with AR kept in mind, and certain negative impacts from this brand new technology were identified and possible solutions were proposed.

Two hypothesis were raised concerning the content of the application and the subsequent testing of the application. The proposed solutions need more testing to have a solid foundation, but the first steps were taken in what we propose, is the right direction.

Author Keywords

Microsoft Hololens; Holotoolkit; LEGO; Augmented reality.

INTRODUCTION

This report focuses on a project concerning an application for the newly released Microsoft HoloLens. The HoloLens was released around march 2017, and the fact that the product is in its prototype stage and is based on very new technology, opens up possibilities and removes any preconceived notions about which applications and uses the HoloLens might have. The technology is relevant in regards to mobile computing in one very apparent way, in that it is a wearable, computing unit. Other than that, it offers augmented reality (AR) possibilities because of its partly see-through screens and user tracking. Since the HoloLens is still a new technology, the mobility and computing power of the product will most likely increase, making it resemble a ubiquitous computer more and more. This continous evolution of mobile computing was one of the reasons that the HoloLens was chosen to develop on in the first place.

The application this report will cover revolves around LEGO. LEGO is a way for kids and adults to build constructions, vehicles and scenery, all in a very physical and three-dimensional way. LEGO thus seemed like a natural

choice for an AR application, since the application layer between the user and the world could expand naturally on the possibilities and limitations of the physical, "real-world" LEGO.

The application in itself should be a sort of digital playground in which a user could interact with LEGO in ways they would find natural. Sticking pieces together the way they would do in real life, stacking and constructing, all interactions that the user knows well from having played around with real LEGO. This was done using interaction through a virtual tablet, known as the "Generator board" and simple drag-and-drop with the bricks. We ended up with a rough prototype of the application which helped us discover the pitfalls and considerations concerning a LEGO implementation in an AR environment.

RELATED WORK

To ease the interaction between the user and the virtual layer presented by AR, one could think of different interaction techniques, so as to not rely on the gesture recognition of the HoloLens.

The implementation with the HoloLens presented in [7]. This small, non obtrusive wristband that the prototype emulates could provide another form of interaction, which some users might prefer to the visual tracking of the HoloLens.

Another, non-obtrusive way of sending inputs to the HoloLens could be with the use of very small devices using the interaction technique presented in [2]. These devices could act as a secondary way of clicking instead of the "tap" gesture made available by the HoloLens. Also using the skin itself as a possible interaction surface, as presented in [8], could lead to an expanded interaction palette.

Providing visual feedback to the user is essential for an AR application to provide a meaningful experience, but since the line is blurred between real world and virtual world, the question of natural feedback remains. This is presented in both [5] and [6], though in wildy different approaches. [5] approaches the natural feedback by means of kinesthetic feedback and [6] approaches it by means of haptic feedback. Using these modalities could provide the HoloLens with a more natural feeling when interacting with the objects in the virtual world.

A possible extra connection between the virtual and real world could be by including and extending real world objects into the virtual world. This is done in [3], and could help with creating a link between the two worlds.




Figure 1. Initial sketch of a separate Main Menu

DESIGN CHALLENGES

Accessibility

To manoeuvre around in any application, a menu is needed. The menu is something every user has experience with and it is typically the first thing a user is faced with when accessing an application. This means that a menu must be short, concise and consist of certain classic elements, that a user would expect to see on a menu.

A user needs a way to close the application. On mobile phones nowadays this can be done with 'return' buttons on the phone, but many applications have a built in exit function.

The user also needs to have some sort of options menu and guidelines. Stacking LEGO seems simple and intuitive, but all the operations and possibilities is something that can confuse a potential user, especially in an AR application.

Lastly it should not be complicated for the user to start a new LEGO session.

A Main Menu

To achieve accessibility a '5 plus 5' sketch generation session was held. Initially we thought about this application as a game, therefore the user would typically be met by a main menu screen, as figure 1 depicts. Here the user would open the HoloLens application, and be met with a menu screen, where actions such as generating a play area, loading/saving a game and a way to quit the application were possible.

One common theme in the sketching of the main menu was separating the design of the menu and the interaction techniques with the menu. The fact that we were working with the HoloLens, led to some sketches being focused on the interaction, such as figure 2 depicts, while other sketches solely focused on the design of the menu.

The possibilities with the HoloLens gestures and the augmented reality made it apparent that the menu had to be moveable, either by closing and opening it at a new spot using the available gestures, or the ability to move it around and place it in favorable self-chosen spots.

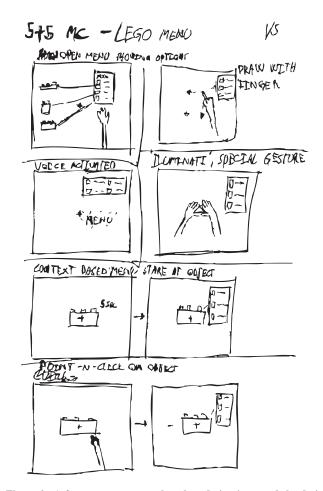


Figure 2. A focus on gestures rather than design impacted the design. The figure shows different ways of creating an interactive menu with gestures.

The Generator

After discussing menus in the context of the HoloLens it became apparent that there was a need for a secondary menu that could be placed and interacted with while using the LEGO application. This menu should only interfere with the play area, and have functions tied to the bricks. Figure 3 is a sketch of the functionalities the "Generator" could have, such as brick types and templates. The generator should have functionalites that can alter the blocks, but it also needs to be interactive and moveable in the specified play area.

As Figure 4 suggests, the generator could be placed on a table and used for generating bricks from that spot. We designed the generator as a virtual tablet device. Theory being that a tablet being a solid familiar object, makes it more intuitive and natural for the user to interact with. To lift, move and place the tablet on a surface is hopefully a simple and familiar task for the user. To accompany the tablet device, a simple interface was designed. The interface only needed simple functions all tied to spawning and altering lego bricks. The user can spawn bricks of different types, change colors, save/load a play scene and spawn different prebuilt templates.




Figure 3. An initial sketch of how the generator could look like. The menu screen has alot of functionalities, and the actions chosen happen on the right side.



Figure 4. First sketch of the generator as a movable object. Here placed on the table, spawning blocks on the table.

Final Design

During the sketching phase, several design choices were discussed. One of the very first concerns was the overall look of the main menu and the generator. The choice of big buttons, clear visual cues and short textual descriptions were present in almost all of the sketches in the early design phase. The need for a simple interface was a must, as stacking LEGO bricks should not be a hassle.

We wanted an effective and efficient process of interacting with LEGO. We also wanted the users to experience the same satisfaction of building LEGO when using our application. Therefore the menus should not be overcomplicated in functions and design, but not sparse in functions either. To achieve these 3 key elements we designed the menu content with simple LEGO thumbnails, that explained what each button did along with simple textual descriptions.

As the development of the application progressed it became more apparent that an actual main menu was not necessary. Using way too many menus in our simple interactive application would hinder the effectiveness and efficiency for the user, due to the limited functions our prototype had to offer.

To circumvent a clunky and cluttered experience for the user we decided on creating a tablet looking generator. Using a single solid object with all functionalities in the same place, would ease the user interaction. Instead of going through a main menu and then having the generator menu, which contains the functionality for working with the LEGO bricks, we decided on spawning the generator at the application start up. Due to the way our prototype works it seems a natural choice to "cut out the middleman", here the main menu.

Granted, with an eventual increase in functionality and complexity of the application, a root/main menu might prove useful




Figure 5. The final design of the prototype. The tablet will have all the needed functionalities, with a fixed brick size.

as to not clutter the users experience when they are building as opposed to when they are in the main menu, where setting options, loading scenarios, downloading templates etc. would be a valid solution.

In the final design the user is with a tablet device, consisting of large buttons with thumbnails and text explaining what each action does. As figure 5 shows, the user can spawn different brick types and colors, as well as having a sandbox mode where a random amount of bricks are spawned to play with. The user can also spawn prebuilt templates, save/load previous sessions and go back to the main menu with a 'back' button.

IMPLEMENTATION

Language and tools

The LegoLens application is built using Unity, where custom scripts are written in C#. Unity is chosen, since it is used in Microsofts own HoloLens academy. Microsoft also provides a software toolkit called HoloToolkit², which binds Unity and the HoloLens together.

For initial testing the Microsoft HoloLens Emulator was used, while in later stages the application was deployed directly to the HoloLens device.

HoloToolkit

The HoloToolkit provides implementations of common tasks in developing applications for the HoloLens. This kit implements functionality which is mostly HoloLens specific, such as spatial mapping and understanding. Also functionality for input methods are provided. The HoloLens comes with two build-in gestures: the bloom and the tap.

Spatial mapping and understanding

These two functionalities are fundamental for the use of the HoloLens, since they let the HoloLens understand the shape of a room. Thereby virtual objects can be placed in the real world. The toolkit provides prefabricated functionality for spatial mapping and understanding, which simply can be added in Unity.

The HoloLens uses a depth camera similar to the camera build into the Kinect v2 and four cameras meant to understand

https://developer.microsoft.com/en-us/windows/
mixed-reality/academy

²https://github.com/Microsoft/HoloToolkit-Unity

environment.³ The spatial mapping relies on the time-of-flight Kinect-like depth camera and the four RGB cameras to provide a robust tracking of the environment.

This connection between the real-world and digital playground created in the application was essential, both to the experience but also to make the application augmenting the reality. The mapping allows to create a relative coordinate system, such that virtual objects can be placed in accurately.

Input methods

The HoloLens tracks the gaze of the wearer, by the assumption that the wearer always looks straight ahead. This is the limitations of the HoloLens, which does not provide augmentation for the whole field of view. Thus if the wearers eyes would be tracked, the wearer could gaze outside of the HoloLens field of view. In this application a cursor appears where the gaze of the wearer collides with mapped objects in the real world or objects created by the application.

In this application the tap method is used. Here there are two different states the interaction can have: a single tap and dragging.

The single tap is used to navigate in the menu on the generator. The HoloToolkit provides functionality, such that objects can be dragged by holding tap. This is used to drag LEGO bricks and the generator around.

Unity scripts

While the HoloToolkit implements the augmentation of objects, the custom Unity scripts implement LEGO functionality. These scripts control the behaviour of the LEGO bricks, the generator and templates.

Generator

The generator script contains the main functionality of the implemented code. Menu interactions are implemented here and thus the necessary functions to instantiate and model bricks. The instantiation is done by loading the prefabricated LEGO brick object, and colouring it depending on user input. A brick is not affected by gravity until the user interacts with the brick. For the purpose of initial simplicity the number of shapes a brick can have is limited.

Templates are implemented in a similar way as bricks, except that these can not be coloured. Also the sandbox feature is implemented in the generator script. It generates 20 bricks with random shape and colour.

The menu itself on the generator works by activating and deactivating the appropriate menu items.

Bricks and Templates

As described above, the brick and template scripts work in a similar way. They both make sure that the generated objects do not rotate and snap to a grid. A one-by-one brick is 0.8cm long and wide and 0.96cm tall (with knobs). Thus bricks are forced to be placed in positions which are multiples of 0.8.

EVALUATION

The goal of the test was to test two hypotheses regarding HoloLens and the application:

H1: The user will be confused/overwhelmed by the virtual layer that the HoloLens provides

H2: LEGO is well suited for the HoloLens

We had two test participants, male and female from different institutions, both of age 23. Chocolate was offered as a reward but was not taken. These were then put through a three-part test, the first part acted as a training session for the actual interaction with the HoloLens application, the second one was different tests in the application wearing the HoloLens and the last part was a short questionnaire.

Since we wanted to test whether or not the HoloLens was too much of an overwhelming experience for the user, the tests were structured so as to minimize any complications with the application itself. Furthermore, the subjects had never been in contact with any AR or virtual reality interfaces beforehand.

The first part, the training session, was created using Prototype on Paper⁴ and physical representations of LEGO bricks. The setup was meant to emulate the view in the HoloLens app as much as possible whilst keeping the overall test setup as low-fidelity as possible. The users were asked to go through most of the menus functionality in short, manageable tasks which were meant to prime them for the same tasks in the HoloLens application.

The second part of the test was in the application itself after a brief introduction to gestures using the HoloLens app "Learn Gestures". This was done to give the test subjects a complete overview of the interaction possibilities with the HoloLens. The test subjects were asked to do simple tasks, such as spawning a brick of a chosen color and shape or instantiating a template.

The third and final part was a short questionnaire consisting of Likert scales and free text questions. These questions were made with the hypotheses in mind without imposing a bias on the subjects.

The evaluation of the results were done in a non-formal way as opposed to the statistical methods described in the lectures (ie. ANOVA, Kruskal-Walls Test etc.). This was done due to our tests not being of a comparative nature, and thus we did not find any way of imposing a strict statistical test on our (small!) test sample. Our test results are based solely on the subjects experiences and opinions and are therefore to be taken with a grain of salt. This test structure came to be because of our hypotheses.

Results

All the Likert scale questions were done on a 1-5 scale. Both participants found the menu very easy to navigate (both gave a 5 on the Lickert scale), and they both agreed on the application/HoloLens being able to track their movements and position satisfyingly. The subjects disagreed on the precision of the placement of the brick, and when asked about this precision one subject said that he/she did not feel comfortable with the interaction since he/she had experienced beforehand

³https://developer.microsoft.com/en-us/windows/
mixed-reality/hololens_hardware_details

⁴https://marvelapp.com/pop/

that bricks and generators could fall through solid, real world objects.

Observations

One user noted that the HoloLens' tracking was thrown off balance when looking into lights, and this confused him/her. Both users felt dizzy when they took of the HoloLens and complained about a queeziness when having the HoloLens on for 15 minutes or more.

Both users thought that a LEGO application would suit the HoloLens/AR in general, because of the possibilities, although the size of the bricks and projects as a whole would have to be considerably larger than real world LEGO bricks. Both participants agreed the size of the bricks presented in the high fidelity prototype was appropriate, although they were not presented with alternatives.

It was observed that one of the subjects, immediately after dropping the generator on the ground, used the "bloom" gesture instead of looking down, since he/she thought that the application had crashed. This could indicate that H1 has relevance and should be investigated further.

One user noted that he/she was unsure whether the control of the brick was done using the gaze or finger dragging.

DISCUSSION

Confusion and overwhelming impressions (H1)

One aspect of the conducted tests was the apparent wow-factor of the HoloLens and virtual layer. The tests and observations showed that the subjects could not utilize the fact that the virtual layer extended beyond their apparent field-of-view. This resulted in many "out of sight, out of mind" situations, where the subjects tried to restart the application although nothing critical had happened. This can of course be explained and mediated using markers and other helping layers to indicate where the points of interest in the application may be located, but this would then in turn clutter an already sparse field-ofview. To ease the subjects into thinking in an AR setting we used the pre-existing "Learn Gestures" application, but this did not seem to have a strong beneficial impact on that issue. The issue that H1 covers is under discussion in [4]. The results in [4] show that user studies need to be central in the development of AR as well as virtual reality applications.

Suitability of LEGO in AR (H2)

One of the hypotheses introduced in the previous section was the suitability of LEGO in an AR setting. This question was asked rather late in the development process. What became apparent was that the virtual LEGO in an AR setting would not be able to provide the same "finicky" feel that LEGO does, sitting at a table, obsessing over small details in an advanced setup. This is because of the computational limitations of the HoloLens and the technology architecture. The minimal rendering distance of the HoloLens is, right now, much larger than the distance one would be from a real-life LEGO project, ie., arms length. This limitation demands a much larger brick size than real-life LEGO and this in turn limits the overall complexity of a virtual LEGO project.

These considerations became our main focus in the user tests: whether or not the HoloLens is applicable in these small scale,

high detail applications such as LEGO. High detail, in this sense, refers to the many ways that LEGO bricks can be joined together to create more and more complex structures. With these structures comes problems, such as occlusions, tracking precision and stabilization issues.

FUTURE WORK

Hypothesis specific

To work with these hypotheses, more tests would have to be conducted, but also the application stability would have to improve dramatically. Users have to feel confident in the application so as to reveal any problems with AR interaction methods as a whole, so that any frustrations and considerations are directed against AR instead of AR AND the application.

With regards to H2, tests showed that brick size, ease of access through the menu and a general handholding of the user (in our case, bricks being locked in rotation and snapping to a virtual grid) improved the LEGO experience in an AR setting. Since the technology is not fully developed it is difficult to specify best parameters such as brick size and functionalities that would improve precision. The test subjects showed a general consensus in that LEGO was suitable for AR. One problem is that they only had one point of reference, our high fidelity, but unfinished prototype, and thus it becomes a very subjective matter whether the brick size is actually of an appropriate size or if LEGO as a whole makes sense in AR. One way of narrowing down specific parameters would be a comparative approach to testing, ie. a prototype with different bricks sizes, functionalities and input methods.

Application specific

To combat the issue with the size of actual LEGO and the complexity available in this scale a virtual magnifying glass could be envisioned. Using a special gesture, a certain area of the LEGO bricks could be brought into view using a secondary "screen", a menu that could show a zoomed in version of the actual view the user has, such as a magnifying glass.

The number of input methods implemented into the HoloLens is limited and this is what a test subject criticized. Thus an extension of the input methods is an obvious next step to take. Here the choice of extensions ranges from implementing more hand gestures to using methods such as WatchSense [7], which utilizes SmartWatches and gestures on the back of the hand to provide a new interaction method.

There is a severe shortage of bricks available in the prototype. Anyone who considers an AR LEGO application will soon have to think of which set of blocks or types they would include. The amount of distinctive LEGO bricks is staggeringly high, and this sort of work would probably benefit greatly from working together with LEGO as to get dimensions and oddities right. This work would also make such an application much more attractive, as one of the strongest selling points of LEGO is the variety, but ensured compatibility.

Improving the stability of the spatial mapping would have to be a top priority if the prototype is to evolve from the state that it is in at the moment. To many disappearing bricks and generators end up with confused users, which is very troublesome taking H1 into consideration.

CONCLUSION

The application presented in this report was equal parts a technical implementation as well as an experiment in how to test something as potentially overwhelming as augmented reality. We have discussed possible problems with testing subjects which have both the specific application to be tested as well as AR as completely new technological inputs and possible solutions to these problems.

In future work, more (thorough) testing needs to be done and a best practice as to how to test complete beginners in an application utilizing augmented reality. Furthermore, the LEGO application itself needs more bricks and functionality to ease the interaction with said bricks.

Concerning the two hypotheses presented in the paper, it was found that users had a difficult time differentiating between application difficulties and limitations of the HoloLens, indicating that H1, the hypothesis revolving the virtual layer and the "wow-efffect", might hold with regards to AR applications.

H2 showed promise, as subjects were positive towards the included functionality, however rough it may have been implemented in the high fidelity prototype.

REFERENCES

- 1. Ronald Azuma, Yohan Baillot, Reinhod Behringer, Steven Feiner, Simon Julier, and Blair MacIntyre. 2001. Recent Advances in Augmented Reality. (2001).
- Patrick Baudisch and Gerry Chu. 2009. Back-of-Device Interaction Allows Creating Very Small Touch Devices. (2009).
- 3. Jens Grubert, Matthias Heinisch, and Dieter Schmalstieg Aaron Quigley. 2015. MultiFi: Multi-Fidelity Interaction with Displays On and Around the BodyReality. (2015).
- Si Jung Jun Kim. 2012. A User Study Trends in Augmented Reality and Virtual Reality Research. (2012).
- Pedro Lopes, Sijing You, Lung-Pan Cheng, Sebastian Marwecki, and Patrick Baudisch. 2017. Providing Haptics to Walls and Heavy Objects in Virtual Reality by Means of Electrical Muscle Stimulation. (2017).
- Samuel B. Schorr and Allisson M. Okamura. 2017.
 Fingertip Tactile Devices for Virtual Object Manipulation and Exploration. (2017).
- Srinath Sridhar, Anders Markussen, Antti Oulasvirta, Christian Theobalt, and Sebastian Boring. 2017.
 WatchSense: On- and Above-Skin Input Sensing through a Wearable Depth Sensor. (2017).
- 8. Yang Zhang, Junhan Zhou, Gierad Laput, and Chris Harrison. 2016. SkinTrack: Using the Body as an Electrical Waveguide for Continuous Finger Tracking on the Skin. (2016).