Pin Header 2,00 mm

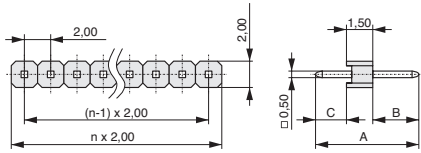|	
Rated current	1,5 A
Rated voltage	150 VRMS / VDC
Withstand voltage	500 VRMS for one minute
Material contact	Copper alloy
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

All dimensions in mm.

pitch **2,00**

termination

contact size □ 0,50

max. pincount **040 / 080**

Variation

1

2

3

4

PCB Layout
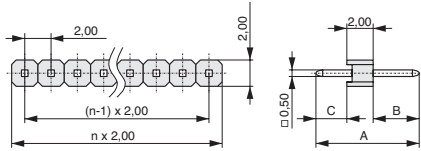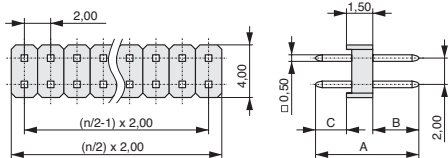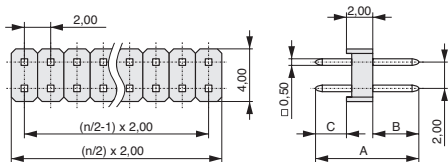
A (see figure left)	B (see figure left)	C (see figure left)	available in variation	
8,20	3,20	3,50	1	3
7,85	4,00	2,35	1	3
8,35	4,00	2,85	1	3
8,70	4,40	2,80	1	3
10,15	5,65	3,00	1	3
10,20	5,85	2,85	1	3
11,55	7,00	3,05	1	3
13,40	9,15	2,75	1	3
15,55	11,55	2,50	1	3
7,85	3,50	2,35	2	4
8,35	3,50	2,85	2	4
8,70	3,90	2,80	2	4
10,15	5,15	3,00	2	4
10,20	5,35	2,85	2	4
11,55	6,50	3,05	2	4
13,40	8,65	2,75	2	4
15,55	11,05	2,50	2	4

Plating:
T = Sn
F = Au
S = Selective Au

* No. of contacts:
Variation 1 = 002 - 040
Variation 2 = 002 - 040
Variation 3 = 004 - 080
Variation 4 = 004 - 080

Variation (1,2,3,4)

No. of contacts * (002,... - 080)

Plating contact (T,F,S)

A ($^1/_{100}$ mm) e.g. 1000 = 10,00 mm

www.mpe-connector.de

GARRY

Order code: 1 5 0 - ? - ? ? ? - 0 - ? - X S 0 - ? ? ? ?

Mating series	156	159	422	158	413	160
see page	4-14	4-15	4-16	4-17	4-18	6-8