



R7, R6 for possible bypass

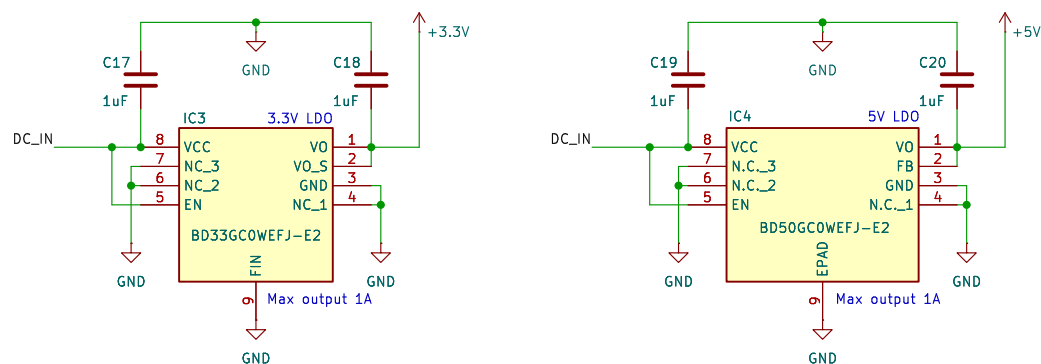

USB to UART

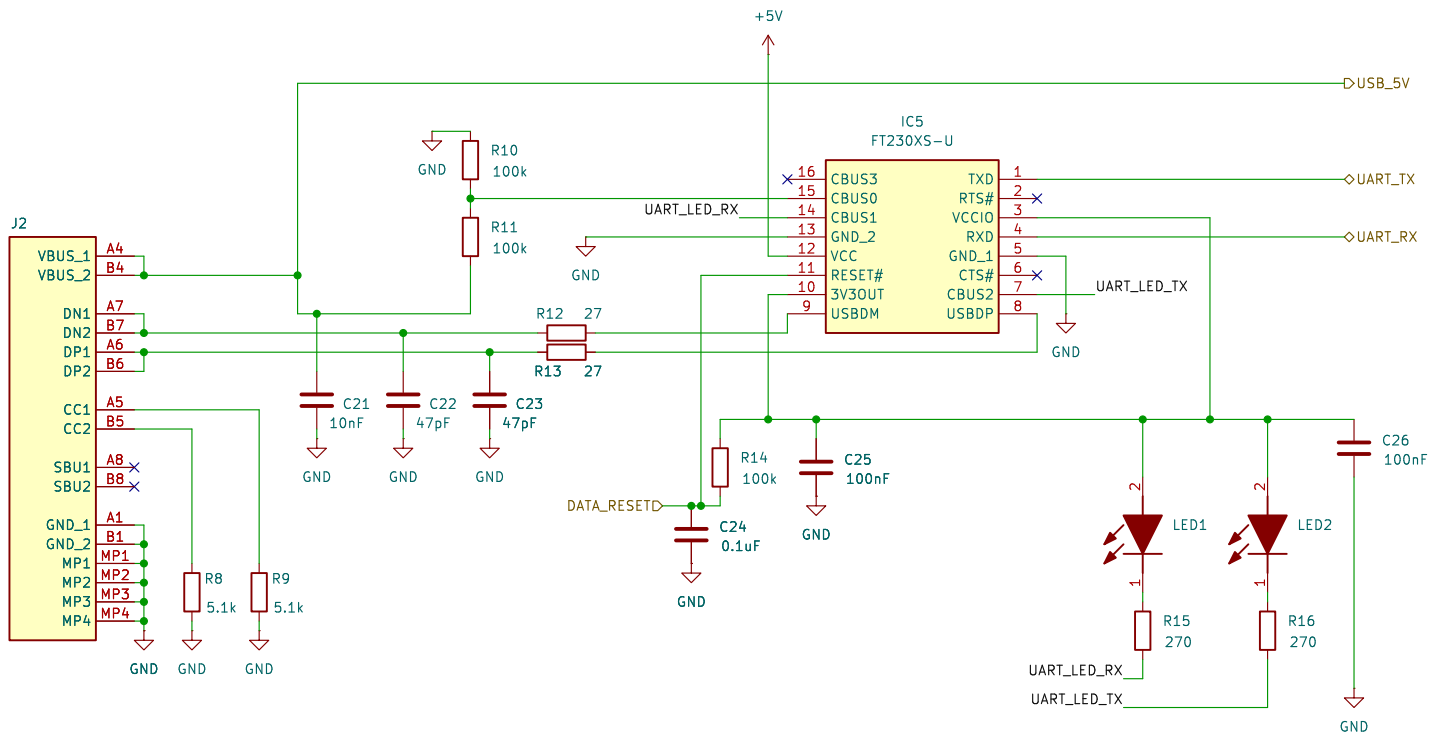

Continuous LED current consumption 40mA (2*20mA)
Peak IC5 current consumption 8.3mA

Sheet: /USB/
File: 3_USB.kicad_sch

Title:

Size: A4


Date:

KiCad E.D.A. 9.0.1

Rev:

Id: 3/6

Indicators

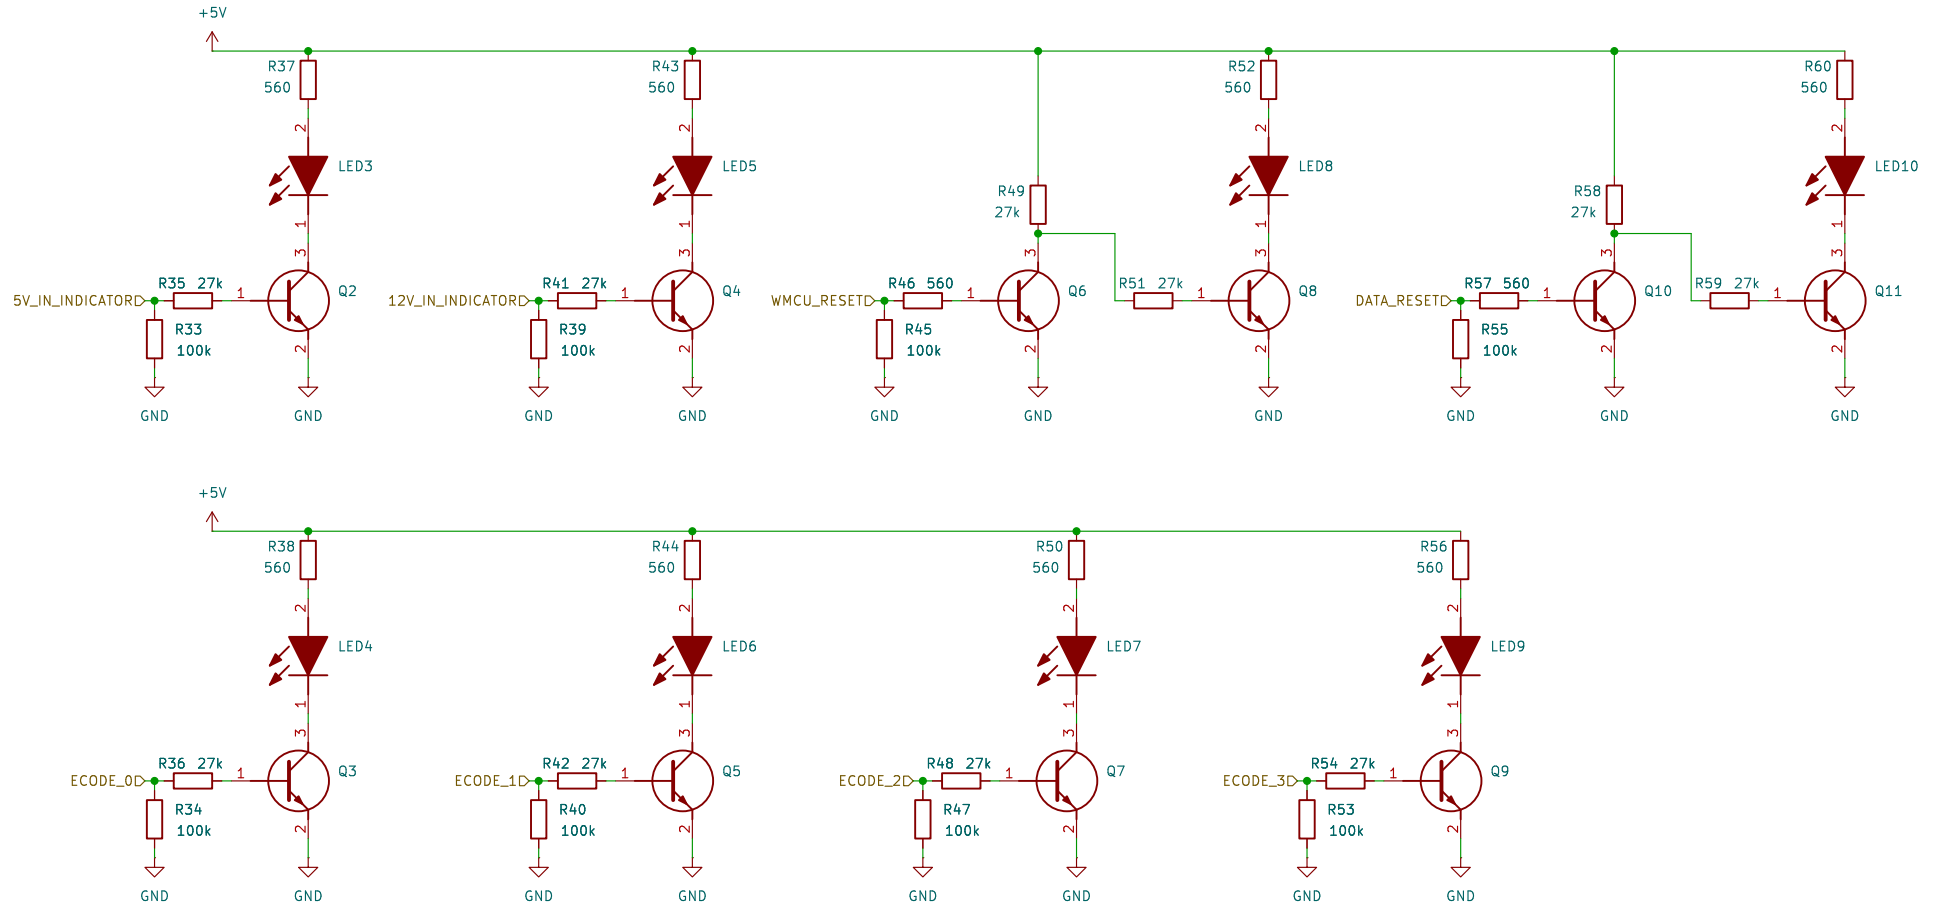

Continuous LED current consumption 160mA (8*20mA)

Sheet: /LEDs/
File: LEDs.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.1

Rev:

Id: 5/6

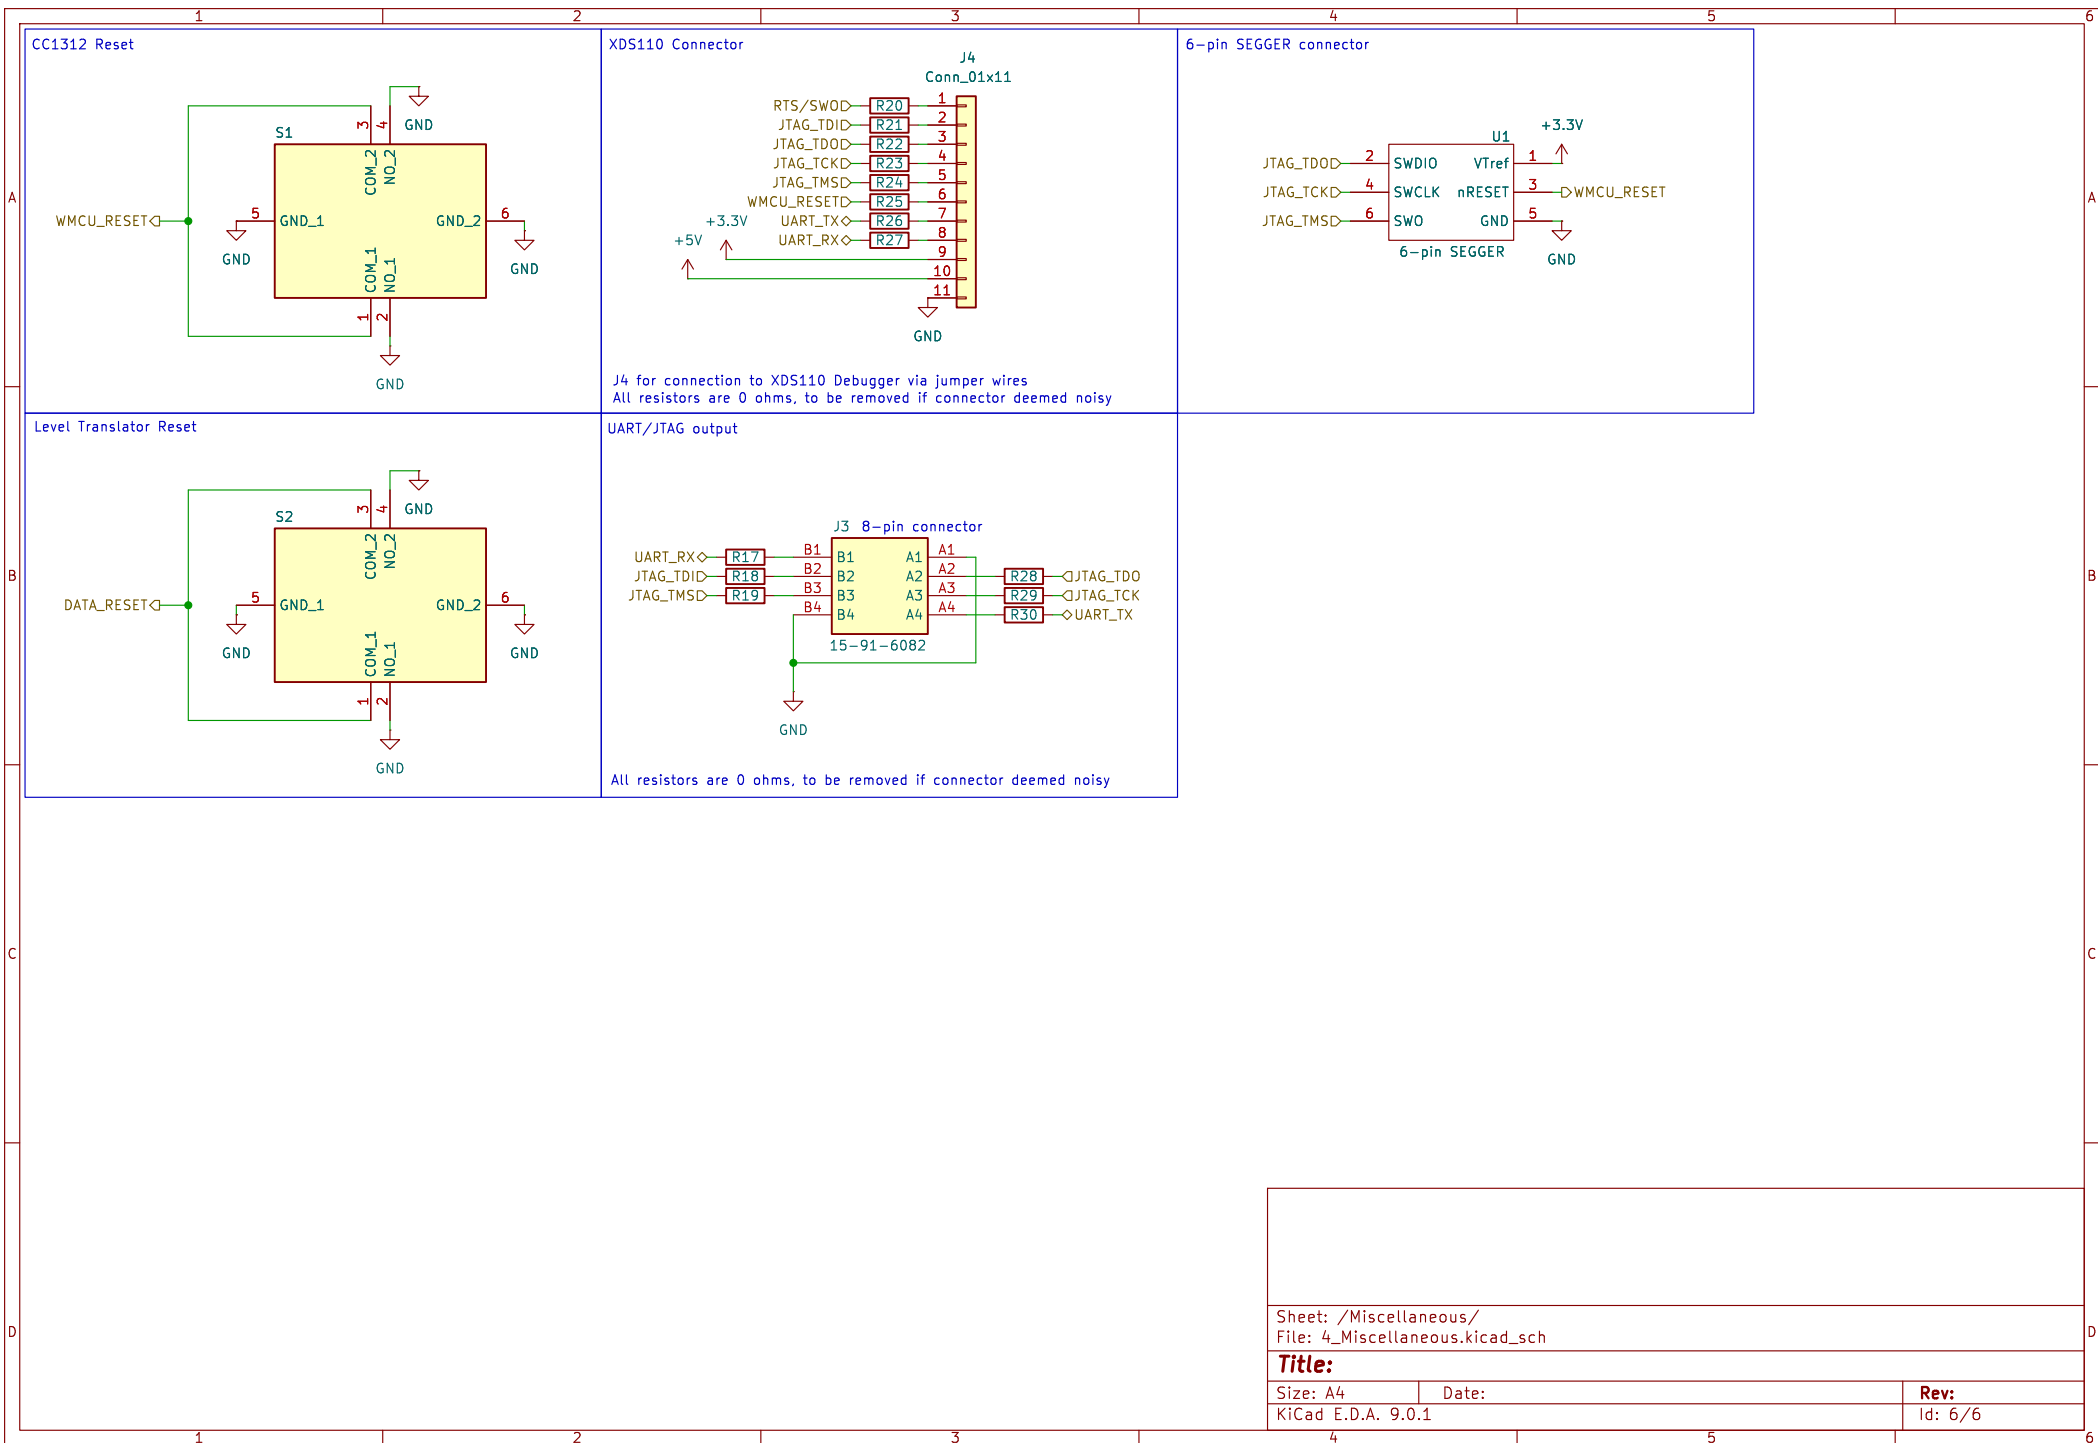

Sheet: /Miscellaneous/
File: 4_Miscellaneous.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.1

Rev:

Id: 6/6