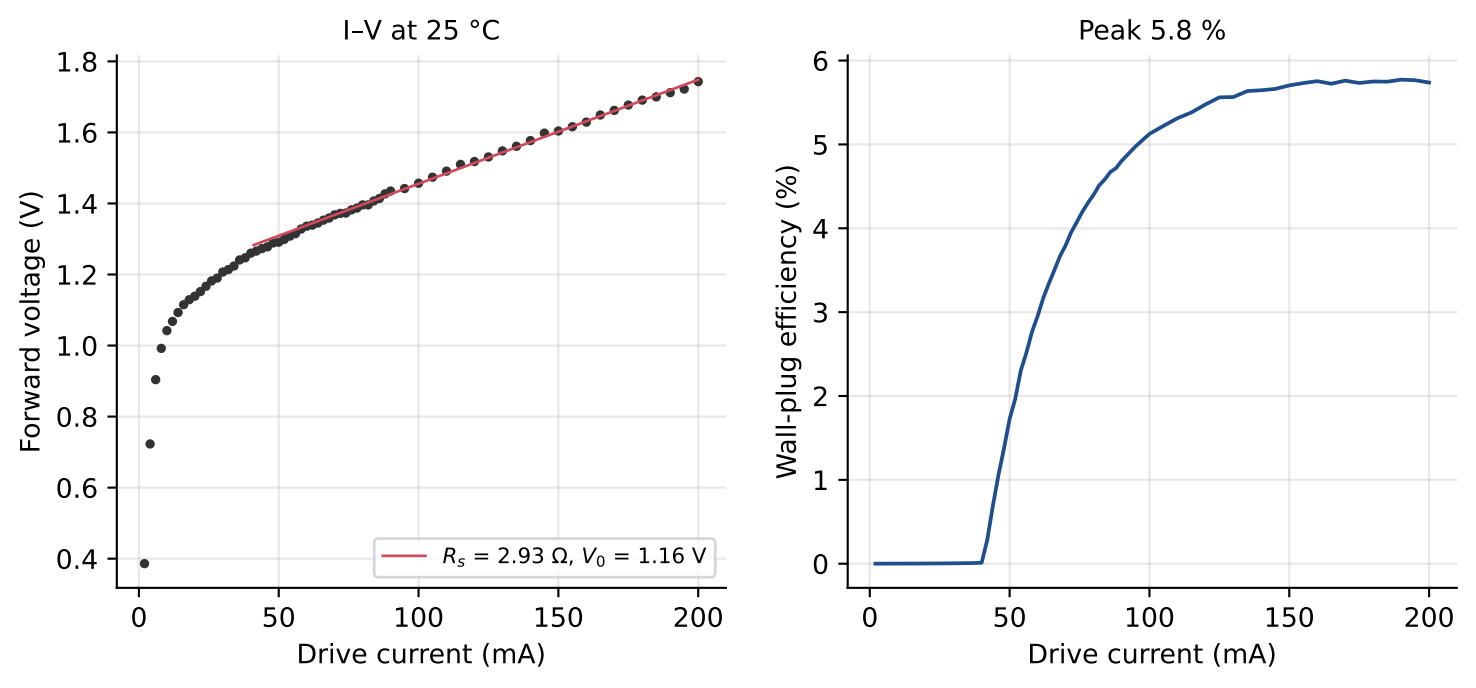
I–V at 25 °C
Forward voltage (V)
Drive current (mA)
R_s = 2.93 Ω, V_0 = 1.16 V
Peak 5.8 %
Wall-plug efficiency (%)
Drive current (mA)