TRADE MARK
SEIKO

TE / TF SERIES

SINGLE NEEDLE, OSCILLATING SHUTTLE HOOK, CYLINDER BED, DROP FEED, LOCKSTITCH MACHINES

TE-6

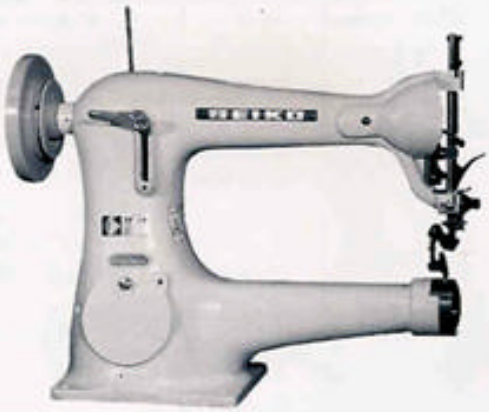

TF-6B

- Variety -

TE SERIES (RIGHT SIDE PULLEY)

TE-6

TE-6-1

For heavy duty

TE-6B

Reverse feed

Standard presser foot : Flat type
(Roller type available)

TF SERIES (LEFT SIDE PULLEY)

TF-6

TF-6B

Reverse feed

Standard presser foot : Roller type

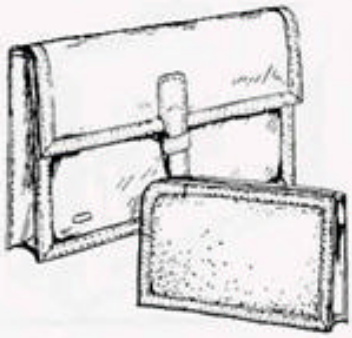

APPLICATIONS:

For sewing light to medium heavy weight materials such as leather, vinyl bags, pouches, various sports equipments and other curved work, etc.

TE / TF SERIES

■ FEATURES

- Long beak oscillating shuttle hook
- Cam take-up
- Cylinder bed
- Reverse stitch (TE-6B & TF-6B)
- Cloth plate for flat work available at extra charge (Part no. 8136C)

■ SPECIFICATIONS

Variety	Max. speed (s.p.m.)	Max. stitch length	Clearance under presser foot (by knee)	Clearance under presser foot (by hand)	Needle bar stroke	Needle (standard)
TE-6	1,400	15/64" (6 mm)	25/64" (10 mm)	9/32" (7 mm)	1-27/64" (36 mm)	DBx1 (#19) 16x231 (#120)
TE-6-1						DBx1 (#21) 16x231 (#130)
TE-6B		13/64" (5 mm)				DBx1 (#19) 16x231 (#120)
TF-6						TFx2 (#11) 34 LL (#75)
TF-6B		5/32" (4 mm)				

Variety	Presser foot type: Standard	Presser foot type: Accessories	Cylinder size	Working space
TE-6	flat	roller	2-27/64" (61.5 mm) dia.	11-1/32" x 5-5/16" (280 x 135 mm)
TE-6-1	roller	flat		
TE-6B	flat	roller		
TF-6	roller	flat	2-1/2" (63.5 mm) dia.	11-1/32" x 5-33/64" (280 x 140 mm)
TF-6B				

NOTE
(1) Speed depends on threads, materials and type of operation
(2) Specifications subject to change without notice

SEIKO
SEWING MACHINE CO., LTD.

Copyright SEIKO SEWING MACHINE CO., LTD. 1001 Printed in Japan