



Beau Connectors

Beau terminal strips and connectors are designed and manufactured in the USA.

Single or double row barrier terminal strips are moulded in thermoplastic or phenolic materials, with a choice of terminal styles, for current applications from 10A to 45A.

The compact and economical Eurostyle® and Euromate® PC mounting terminal blocks are available on 3.81mm (0.15") to 10.16mm (0.40") spacing, in fixed and pluggable styles with current ratings from 8A at 150V to 60A at 600V.

The rugged and durable flat bladed plugs and sockets are produced in a range of cable and chassis options, with currents up to 15A at 250V.

Full product catalogues are available detailing the complete Beau ranges.

Type	Page
3300/5400 Series	100
86 & 87 Series	100
70 & 72 Series	101
77 & 28 Series	101
97 Series	101
93, 94, 90 & 86 Series	101




- Plug or Socket Versions
- Plug - Flat Blade Connections
- Socket - Double Wipe Contacts
- Fixing Brackets or Snap-Fit Versions
- Cable Mounting Backshell Variations
- UL & CSA Approvals

3300 Series


- 10A, 250V
- 2-33 Poles
- Pre-Grounding Option
3-33 Poles (inc Grounding Contact)

5400 Series

- 15A, 250V
- 4-16 Poles
- Pre-Grounding Option
5-13 Poles (inc Grounding Contact)

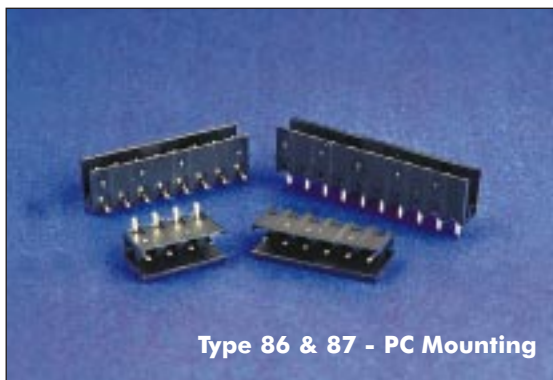

- Horizontal & Vertical PCB Headers
- 15A, 300V
- Open or Closed Ends
- 2-24 Poles
- UL94V-0 Insulator - Black
- With or Without Threaded Retention Inserts
- 86 Series - 5.08mm spacing
- 87 Series - 5.00mm spacing
- UL & CSA Approvals

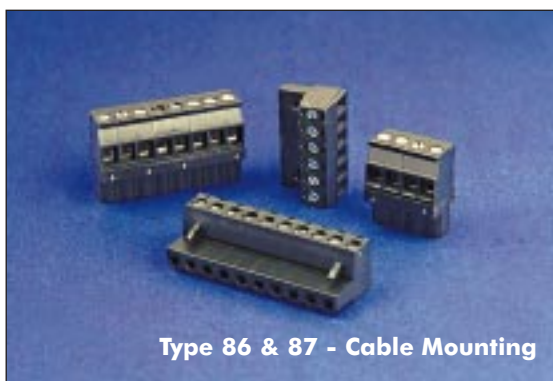


- Eurostyle® Pluggable PCB Terminal Blocks
- 15A, 300V
- In-Line or Side Entry Versions
- 2-24 Poles
- UL94V-0 Insulator - Black
- 86 Series - 5.08mm spacing
- 87 Series - 5.00mm spacing
- UL & CSA Approvals

70 Series

- 0.325" (8.3mm) Spacing
- Single Row
- 20A, 300V
- Thermoplastic
- UL94V-0 Insulator
- 2-30 Poles
- Rear Terminal Options
- Also available as Tri-barrier with closed rear wall
- UL & CSA Approvals

72 Series

- 0.375" (9.5mm) Spacing
- Single Row
- 25A, 300V
- Thermoplastic
- UL94V-0 Insulator
- 2-26 Poles
- Rear Terminal Options
- Also available as Tri-barrier with closed rear wall
- UL & CSA Approvals

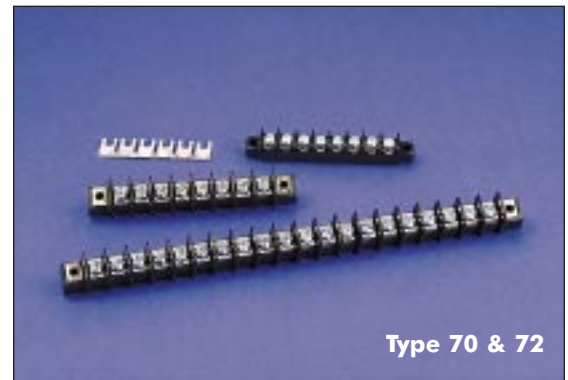


Type 70 & 72

77 Series

- 0.375" (9.5mm) Spacing
- Double Row
- 20A, 300V
- Thermoplastic
- UL94V-0 Insulator
- 2-30 Poles
- Rear Terminal Options
- UL & CSA Approvals

28 Series

- 0.688" (17.5mm) Spacing
- Double Row
- 50A, 300V
- High Temperature Phenolic
- UL94V-0 Insulator
- 2-12 Poles
- Rear Terminal Options
- UL & CSA Approvals

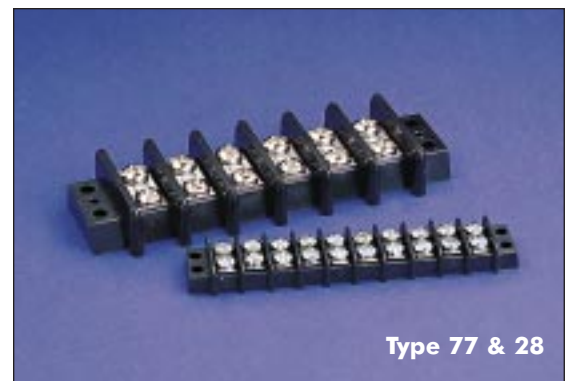

Type 77 & 28

97 Series

- 0.40" (10.16mm) Spacing
- Single Row
- 60A, 600V
- Polyamide - Colour: Black
- UL94V-0 Insulator
- 2-12 Poles
- UL & CSA Approvals



Type 97

- Euromate® Pluggable PCB Terminal Blocks
- 93 Series 3.81mm Spacing, 12A, 300V
Mates with 90 Header Series
- 94 Series 5.08mm Spacing, 15A, 300V
Mates with 86 Header Series
- 90 Series PCB Header 3.81mm Spacing,
Vertical or Horizontal Mounting
- 86 Series PCB Header 5.08mm Spacing,
Vertical or Horizontal Mounting, Open or Closed Ends
- UL & CSA Approvals



Type 93, 94, 90 & 86



- **Plug and Socket Connectors**
- Rugged Flat Bladed Connectors
- 2 to 33 way
- 10-15A at 250V a.c.



- **Barrier Terminal Strips**
- Single or Double row
- Thermoplastic or Phenolic materials
- Current ratings from 10A up to 45A
- 1 to 30 way
- **Eurostyle PCB Connectors**
- Fixed and Pluggable PCB Mounting Terminal Blocks
- 5mm or 5.08mm spacing
- UL94V-0 material