
APPLICATION · PACKAGING AND PAPER

A SHARED SETUP REFERENCE ACROSS SIZE CHANGES

Packaging and paper lines run a wide variety of sizes, and every changeover means resetting the position of guides and process elements. ServoMotion reads those positions from the recipe: when the size changes, the operator selects the recipe and the laser reference lines rebuild within the same reference frame.

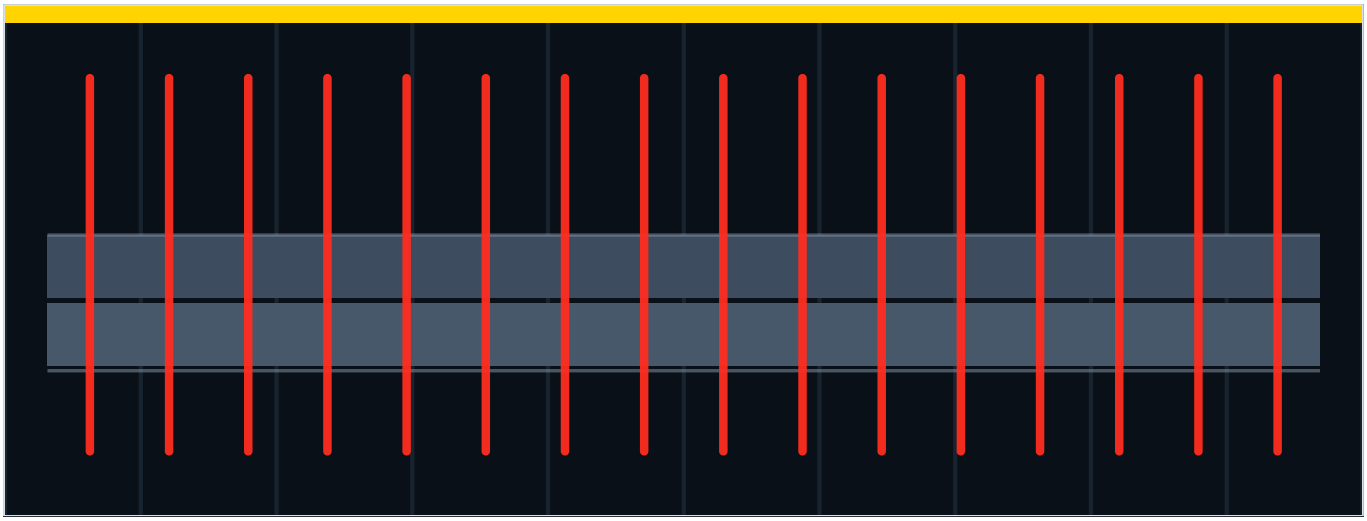

Shuttle SYSTEM USED IN THE EXAMPLE INSTALLATION	**16** lasers CARRIAGE COUNT	**1,800** mm TRAVEL

ON THE LINE — DO YOU RECOGNISE THESE SYMPTOMS?

The same product, different shifts

The same size is set slightly differently by different operators; these setup variations increase material waste.

No common reference between sizes

Every changeover starts from scratch because there is no shared position reference across sizes.

Setup measurement takes time

Tape measures and templates are slow on wide lines and difficult to repeat.

Start-up scrap is routine

The first metres after each changeover are written off as standard practice.

WHAT WE MEASURE DURING THE SITE SURVEY

Size range	The difference between the narrowest and widest size determines travel range and rail assembly length.
Number of simultaneous reference lines	The number of guide or process positions that must be visible at once determines the architecture.
Changeover frequency	The number of changeovers per day forms the basis of the payback calculation.
Working distance	The vertical distance between the laser and the surface determines line width and angular tolerance.
Surface and ambient light	Paper colour and overhead lighting affect line legibility.
Automation interface	Whether recipe data can be read from the line controller defines the integration scope.

WHICH ARCHITECTURE FITS THIS SEGMENT?

MOST APPLICATIONS

SHUTTLE PRECISOR

When many positions must be visible at once, a single servo axis carries the laser carriages to their recipe positions in sequence. Changing size then means selecting a recipe rather than re-measuring the line.

IF THE NUMBER OF PROJECTED LASER LINES IS LOW

CORE PRECISOR

If only a few positions need to be visible at the same time, an enclosed industrial profile may be sufficient at a lower investment.

EXAMPLE INSTALLATION

SHUTTLE PRECISOR · 16 LASERS · 1,800 MM TRAVEL

Sixteen laser carriages move to the positions defined in the recipe. When the size changes, the operator simply selects the recipe and the positions are rebuilt within the same reference frame. These figures come from one example installation; the dimensions for your line are determined during the site survey.

This note summarises the typical requirements of the segment and one example installation. The final system architecture, housing size and scope of connection are established during the site survey. The lasers provide an alignment reference; material and machine elements are set by the operator. Values may change without notice as the products are developed.

LET US REVIEW YOUR LINE TOGETHER servomotion.com.tr/en/contact.html