




Table of Contents	Part Reference	Details of Revision

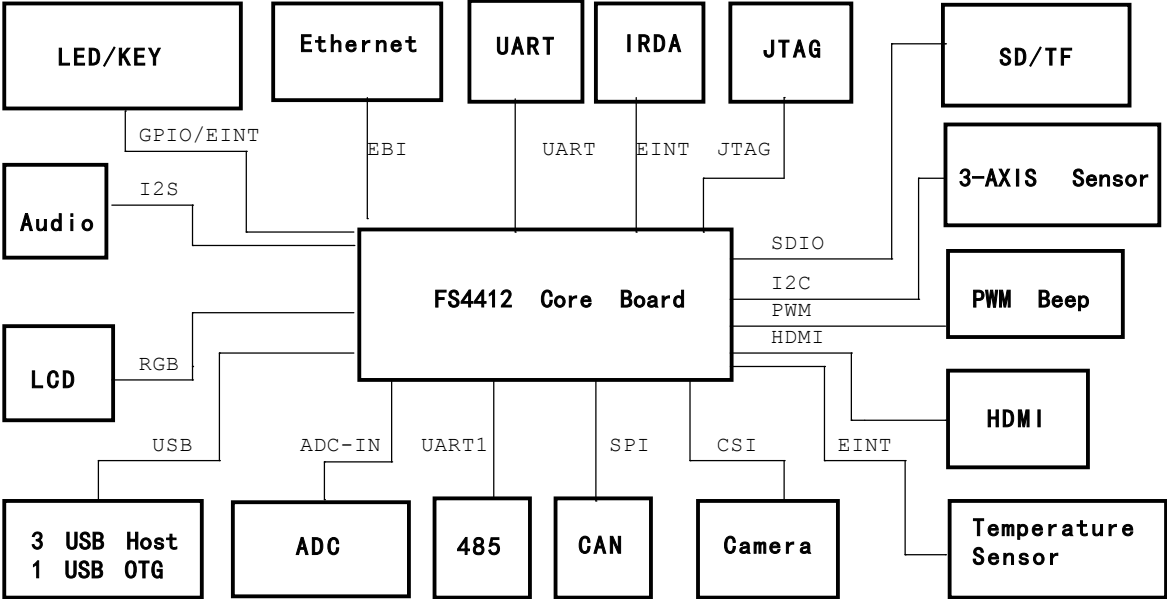

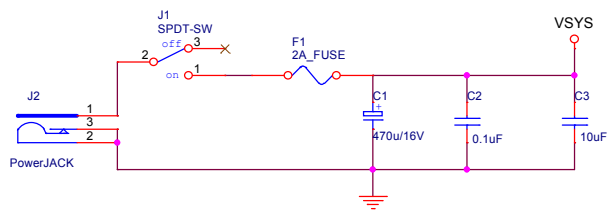


5V DC JACK

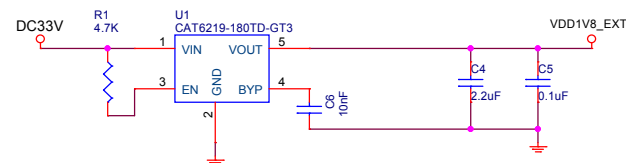

3.3V --> 1.8V

H1 H2 H3 H4


Mounting holes

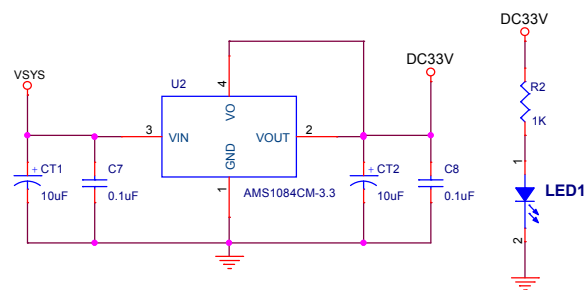

5V --> 3.3V



RESET

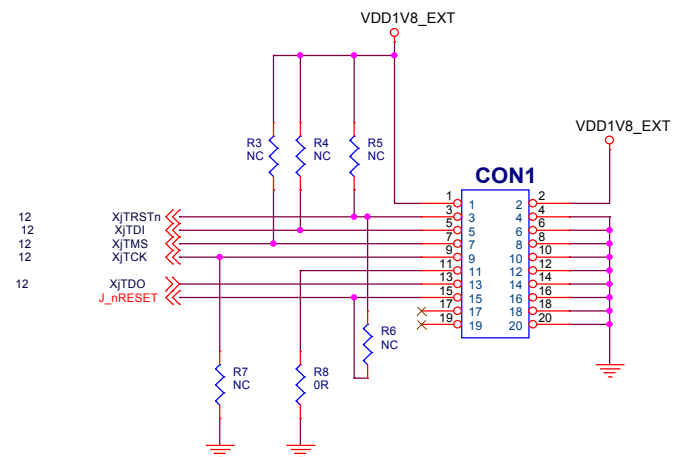





JTAG





D

C


B






A



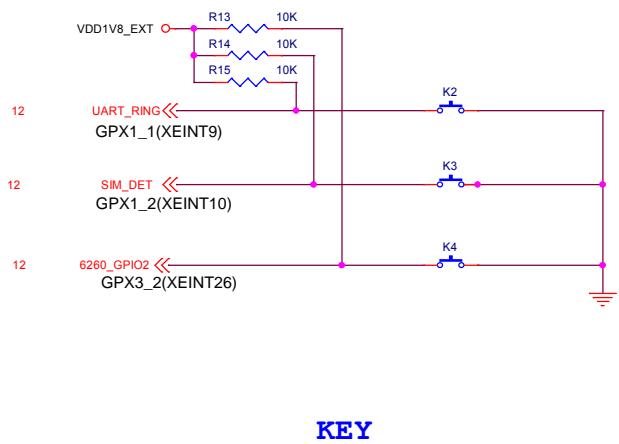
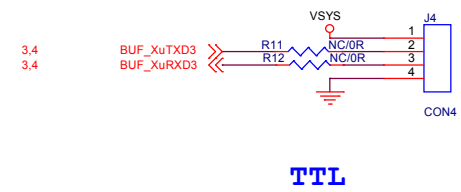
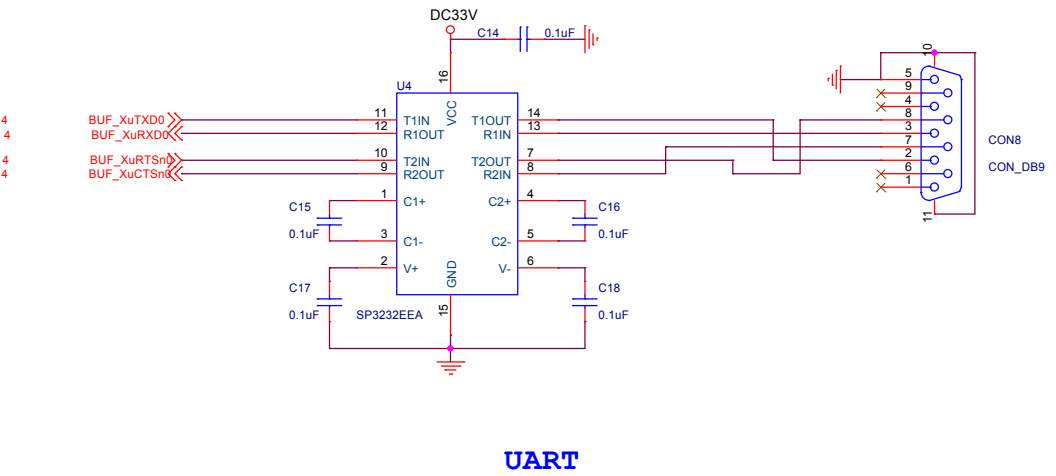
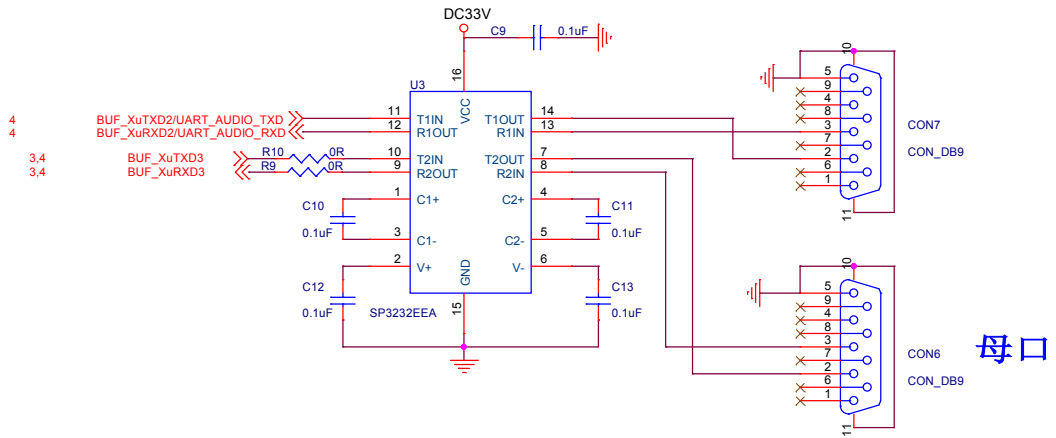


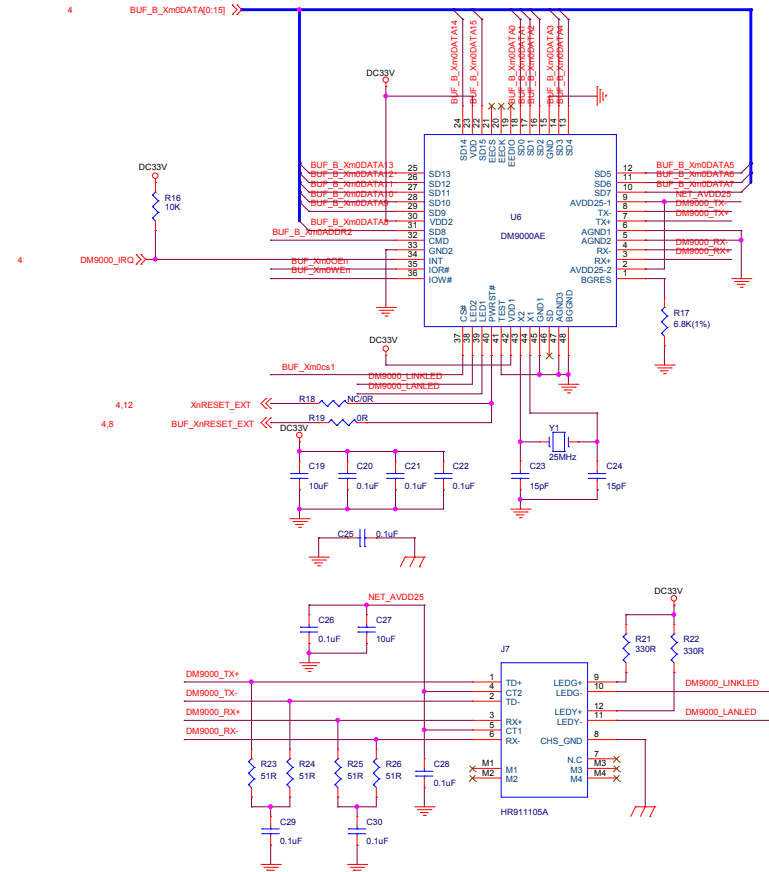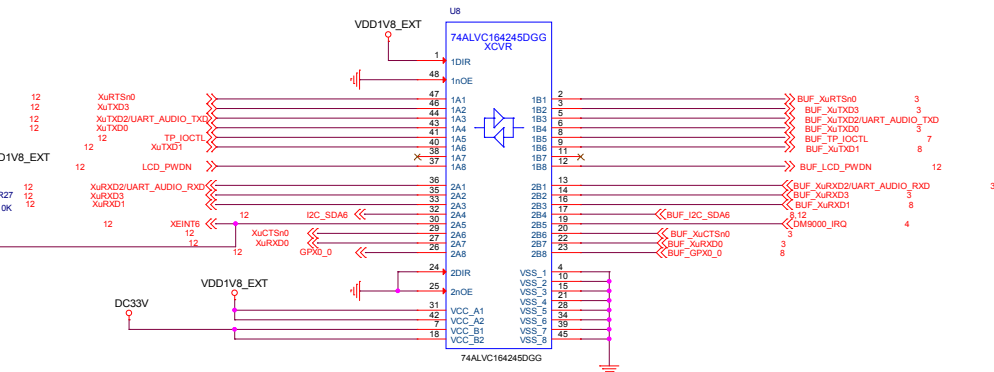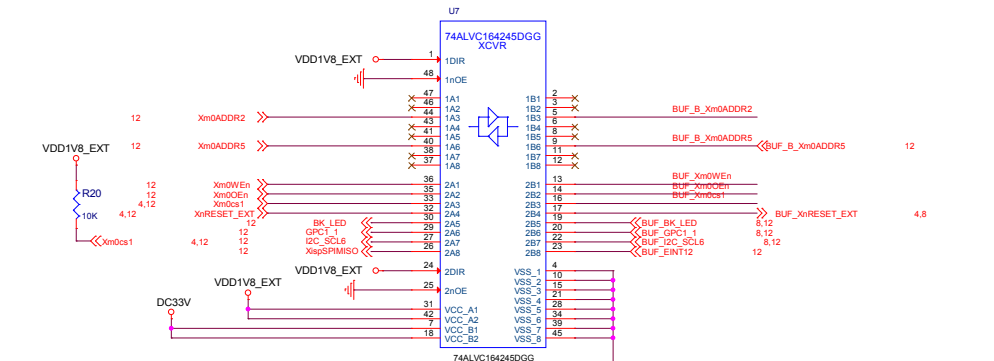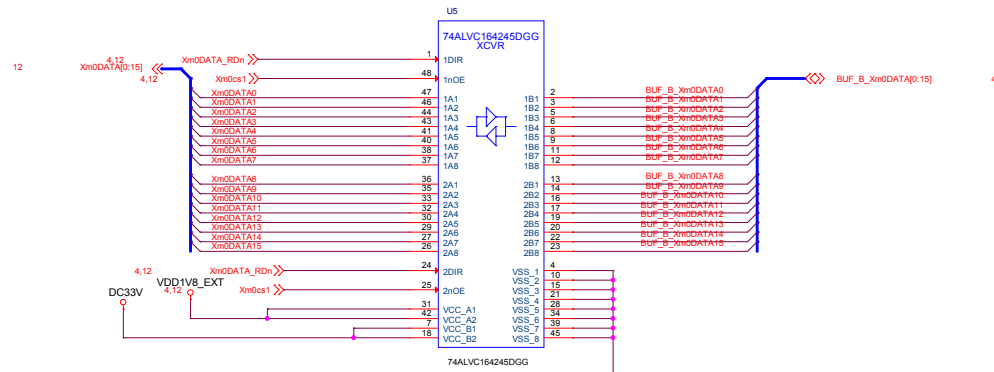


100M ETHERNET

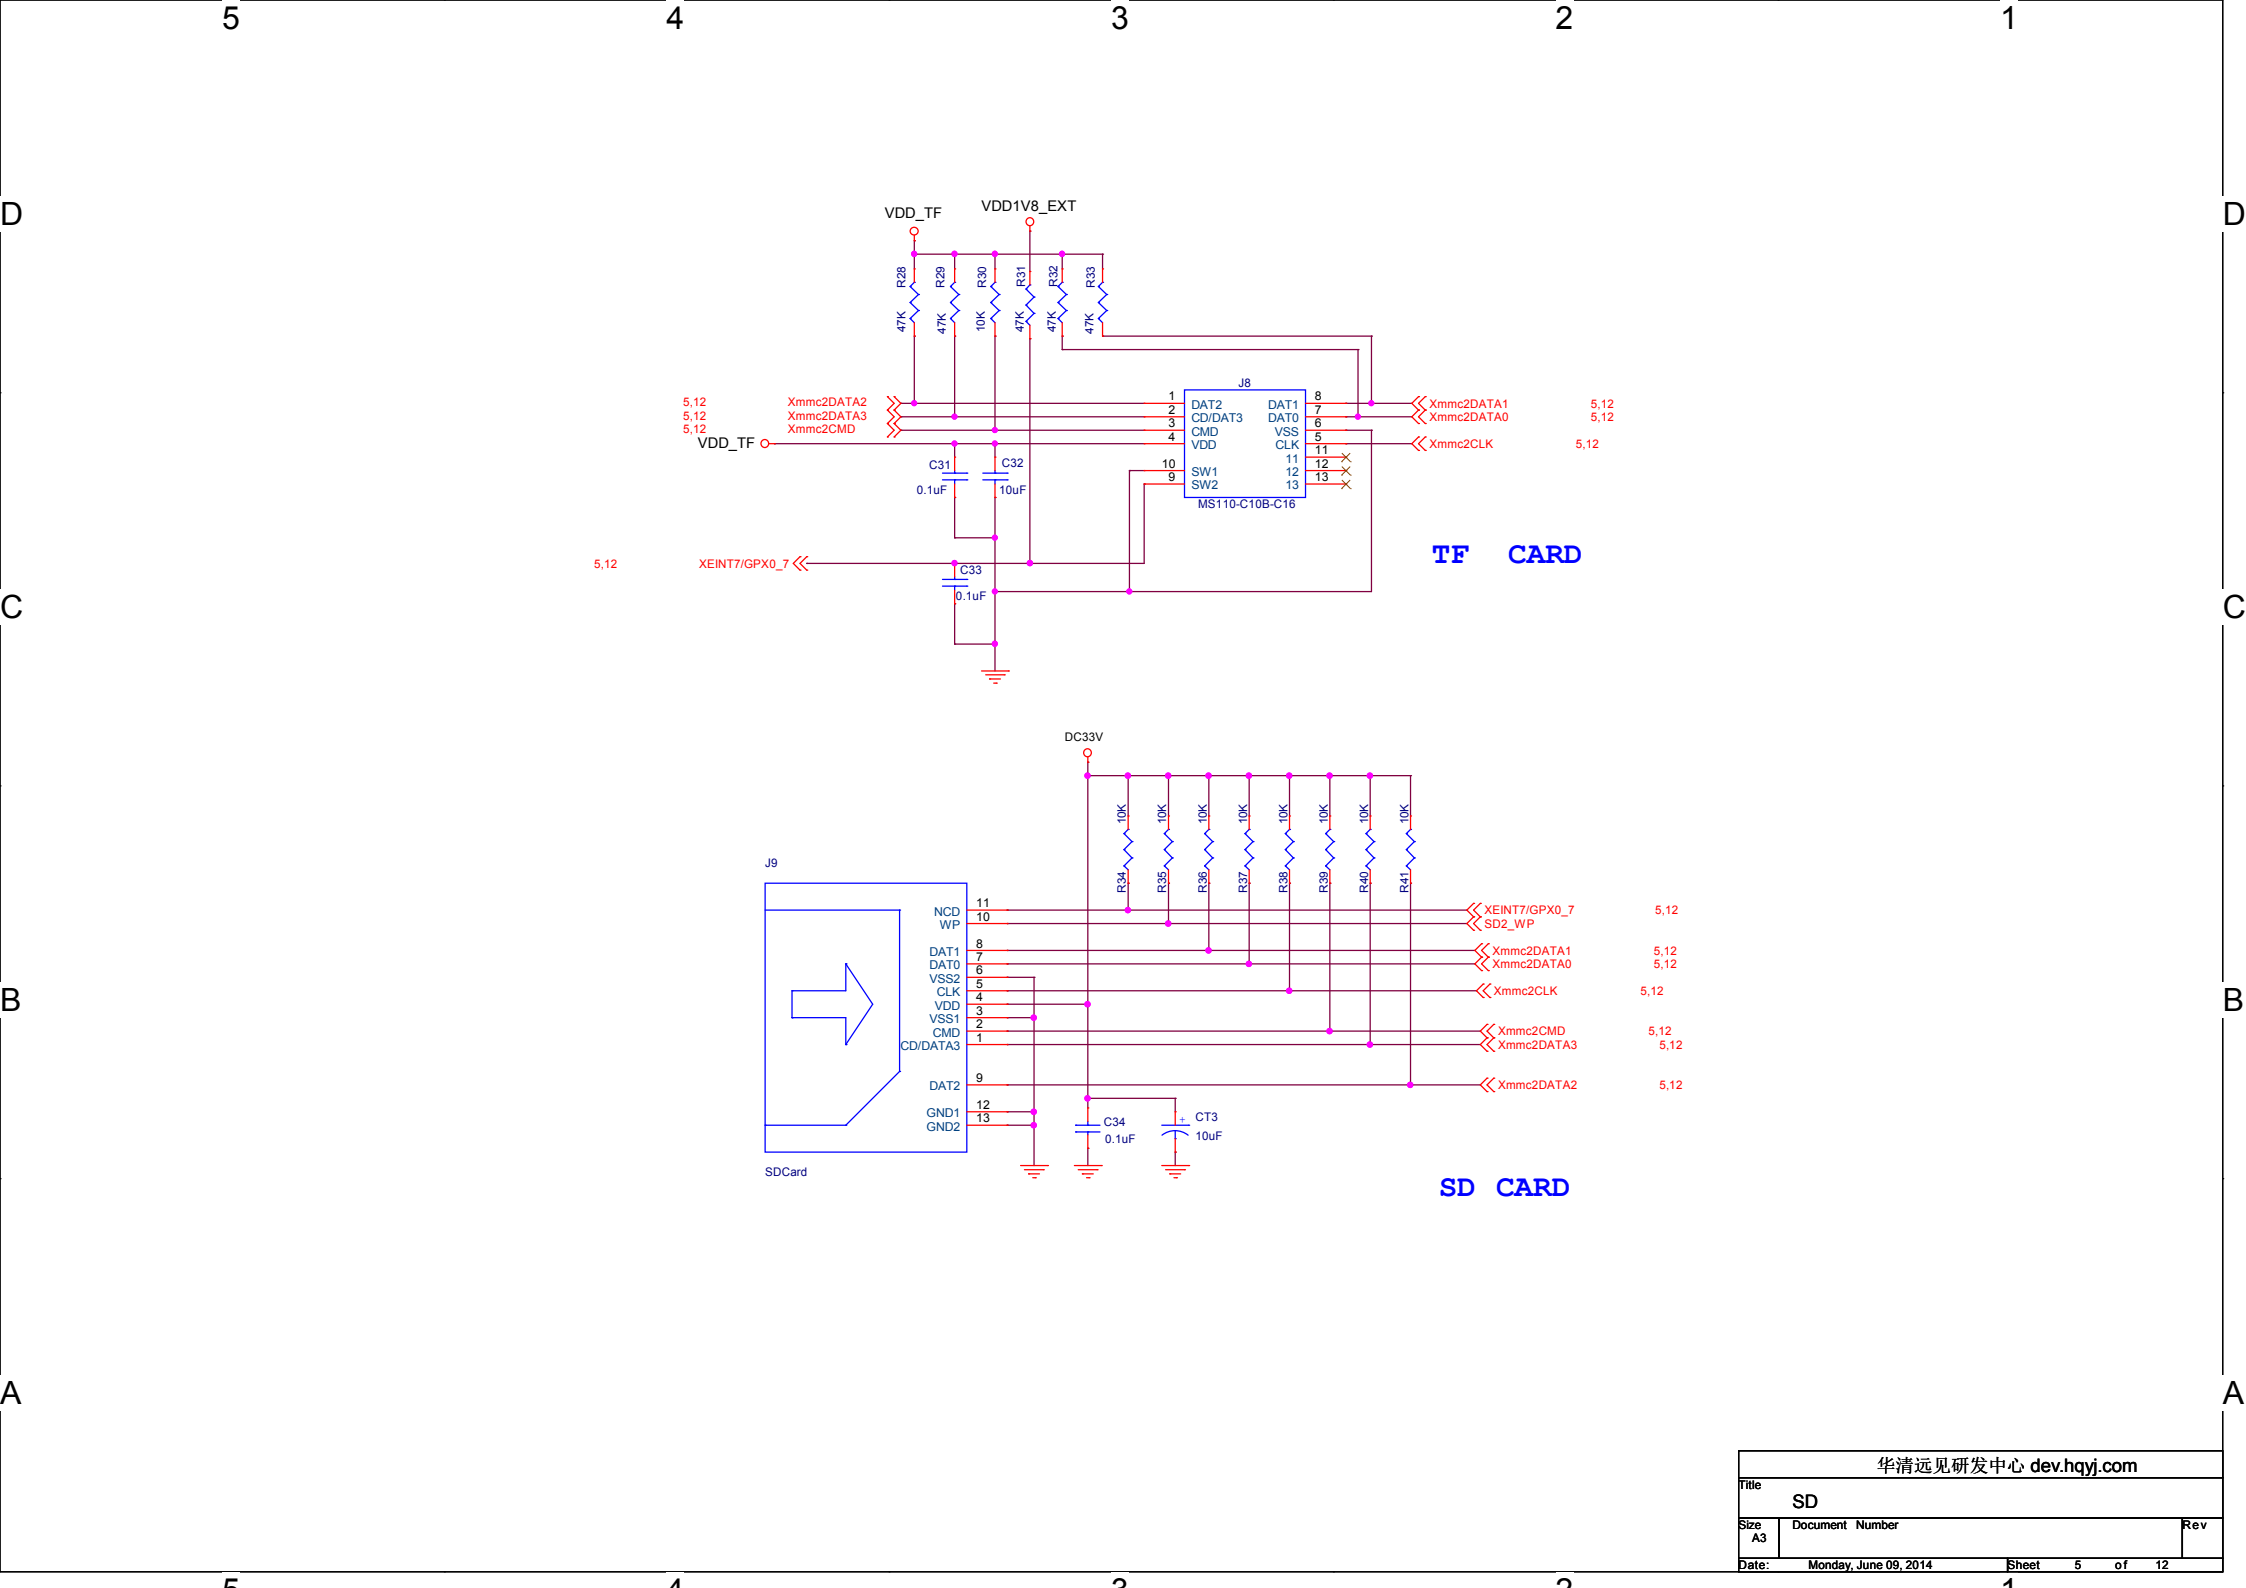

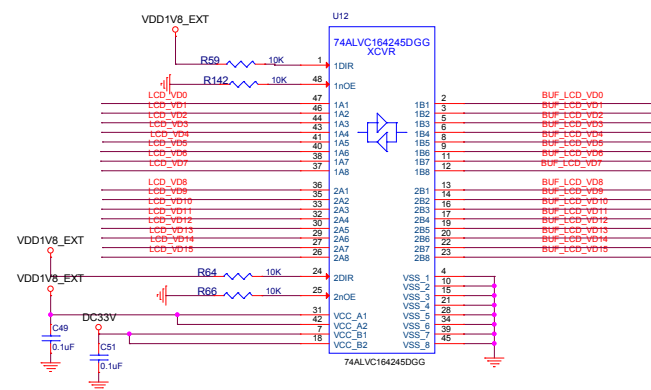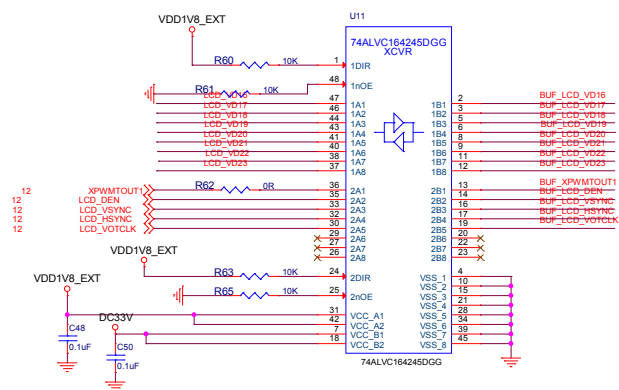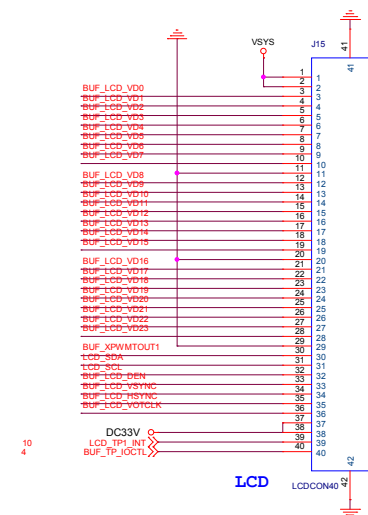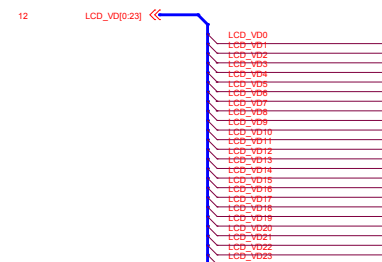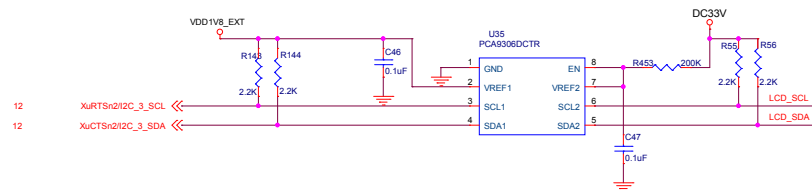


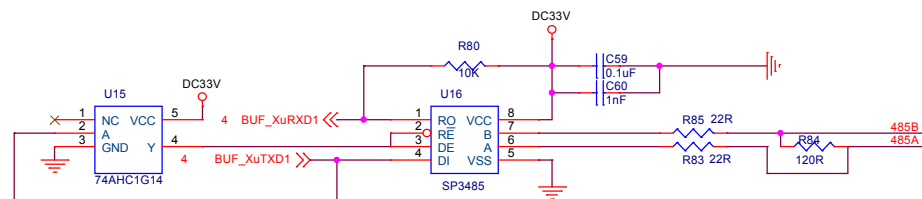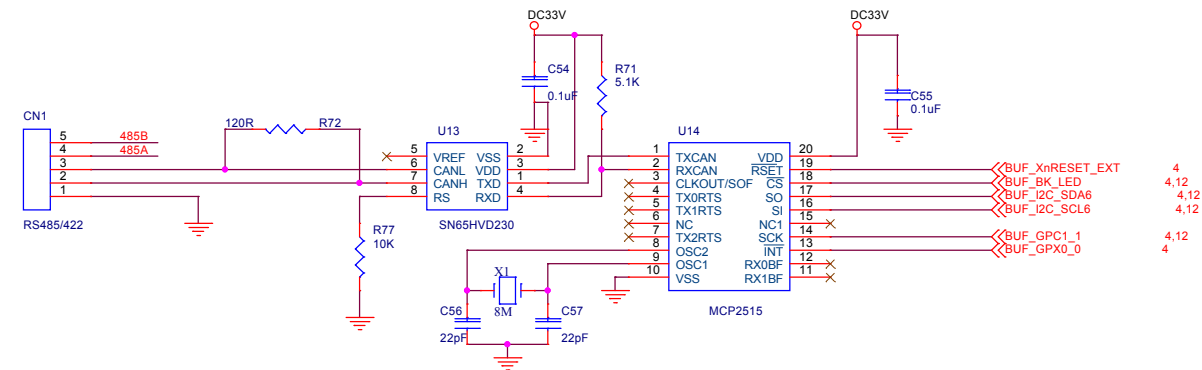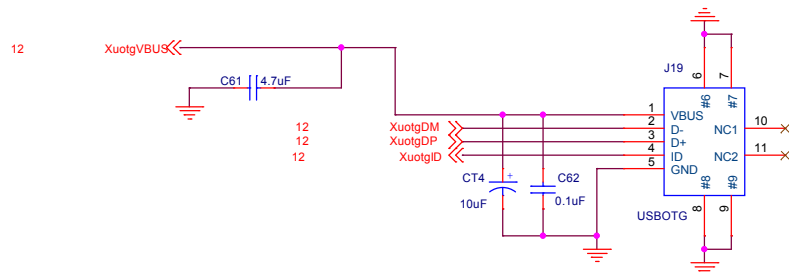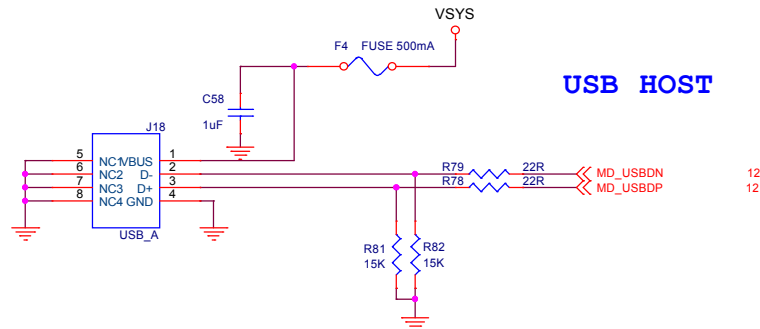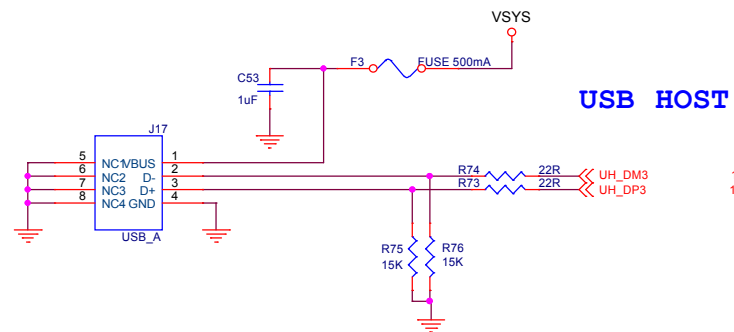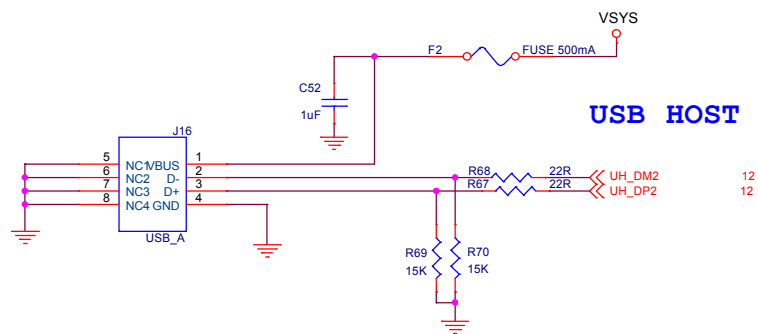


华清远见研发中心 dev.hqyj.com			
Title	USB/485/CAN		
Size	Document	Number	Rev
Date:	Monday, June 09, 2014	Sheet	8 of 12

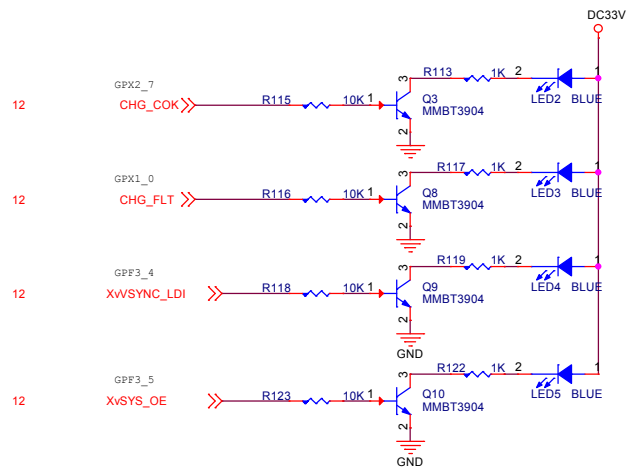


LED

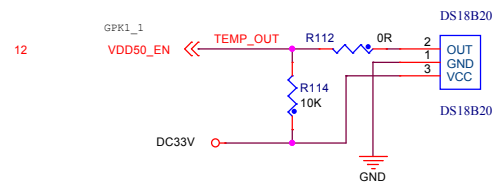


Temperature Sensor

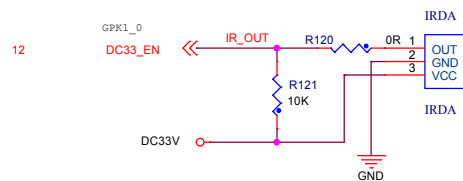


IRDA

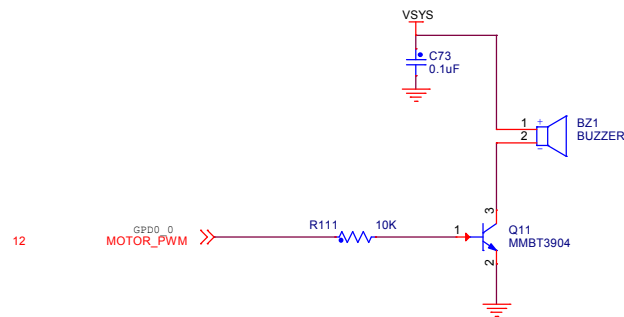

PWM BEEP



ADC

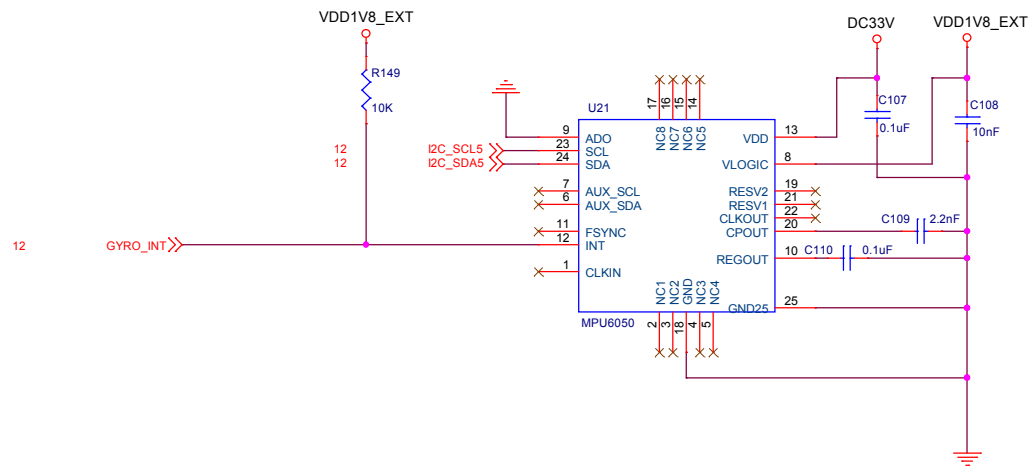

Gyroscope 3-AXIS Acceleration Sensor

板对板连接器定义

