
DESIGN & SUPPLY
DOOR SPECIALISTS

MERTHYR TYDFIL · ESTABLISHED 1986

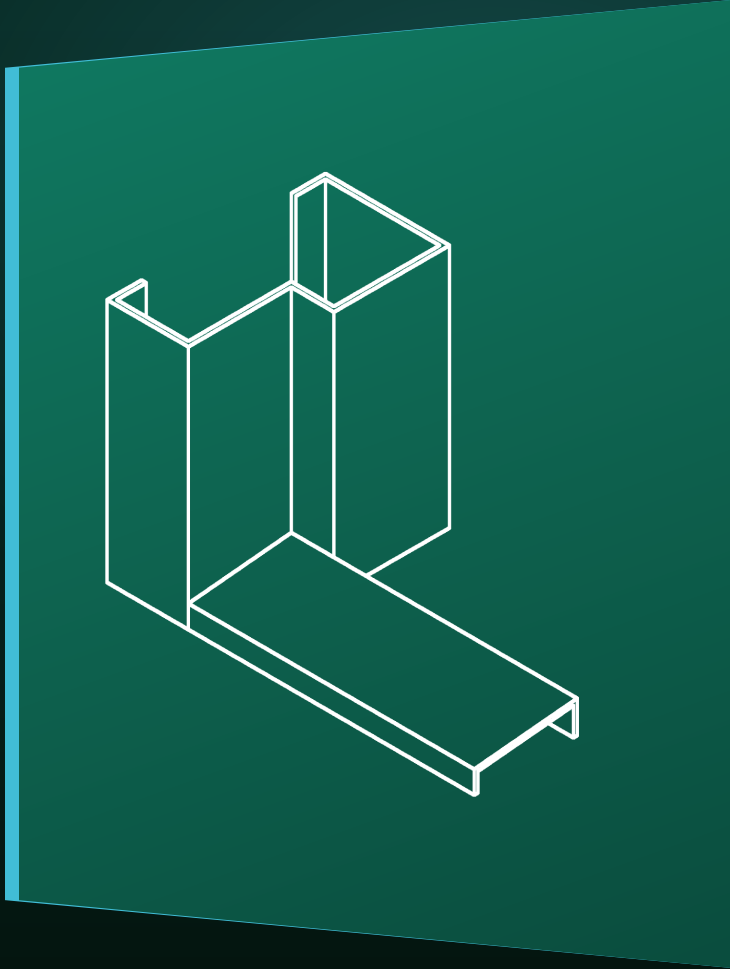

TECHNICAL INFORMATION

CILL TYPES.

DS-TEC-CILL · VERSION 2.0 · OCTOBER 2026

The standard cill profiles for Design & Supply steel doorsets — what each type is for, when to choose it, and its section dimensions. Types A to J.

ORDERING

Please quote the cill type when ordering. Handings and sizes must be confirmed when ordering. If you do not specify a cill, the H type is supplied as standard.

CONTENTS

Cill type A	page 2	Cill type B	page 2
Cill type C	page 3	Cill type D	page 3
Cill type E non-standard · chargeable	page 4	Cill type F	page 4
Cill type G non-standard · chargeable	page 5	Cill type H supplied as standard	page 5
Cill type J	page 6		

QUESTIONS ABOUT YOUR ORDER?

Contact us to discuss your cill requirements.


01685 350 114


sales@designandsupply.co.uk · designandsupply.co.uk

A

CILL TYPE A

This type of cill is used when perhaps the floor outside is raised. Using this cill will allow the door to swing freely open without being obstructed by the outside floor.

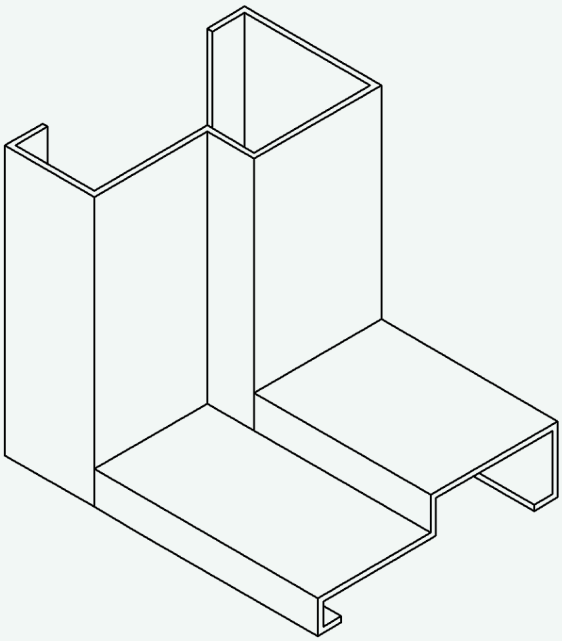


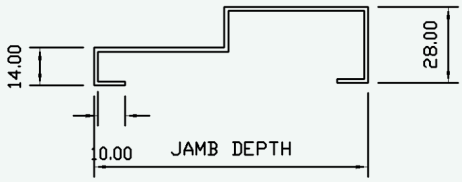


B

CILL TYPE B

This type of cill is only ever used on an inward opening door. The cill is fitted in the rebate of the frame, with the slope running down towards the outside. Thus if any rain runs down the door onto the cill it will then run down the slope of the cill and onto the outside floor.

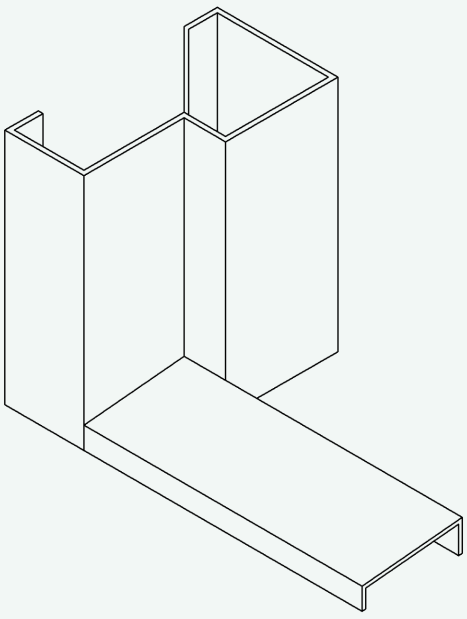





C

CILL TYPE C

This type of cill is commonly used on doors where perhaps wheelchairs, trolleys, etc are common traffic through the doors.

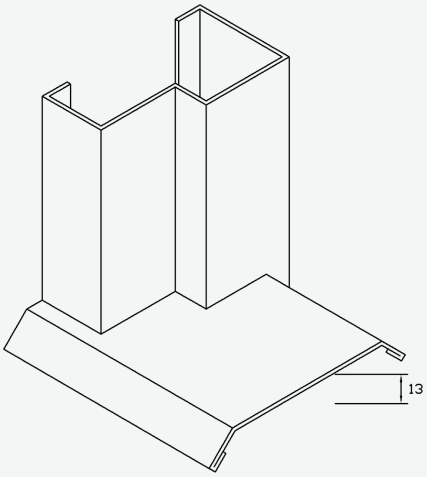




D

CILL TYPE D

This type of cill is commonly used on doors where perhaps wheelchairs, trolleys, etc are common traffic through the doors.

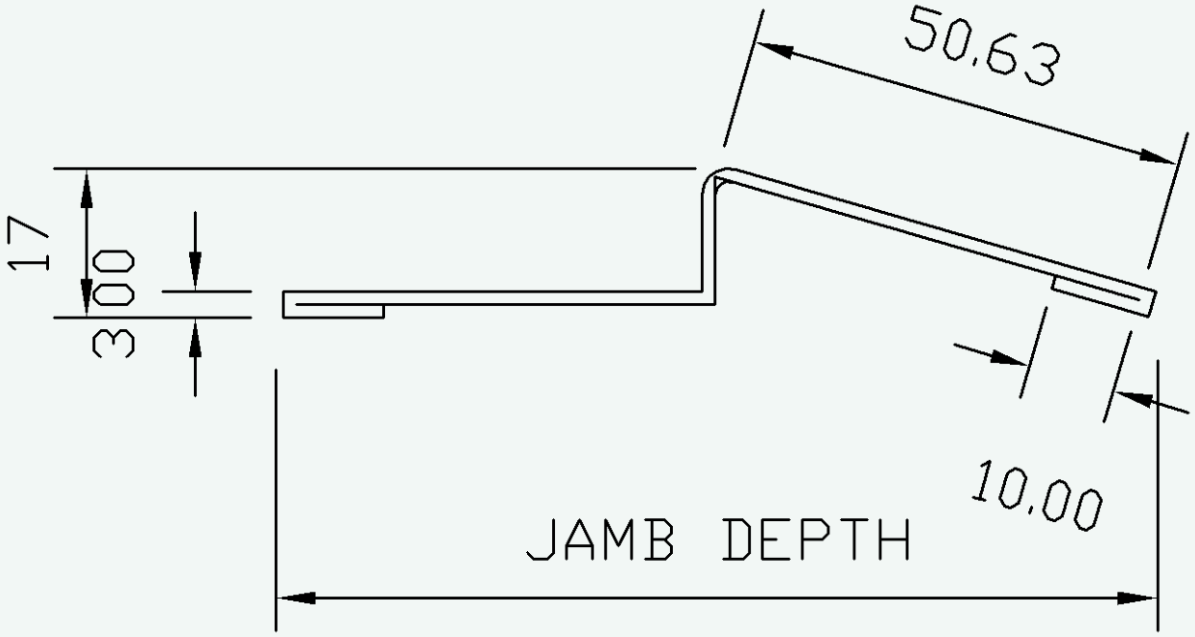



E

CILL TYPE E

NON-STANDARD · CHARGEABLE

This type of cill is a 6mm flat bar cill which sits directly under the frame. This cill is particularly good when the floor isn't finished or is uneven or crumbly. Please note that this cill is not standard and is chargeable.

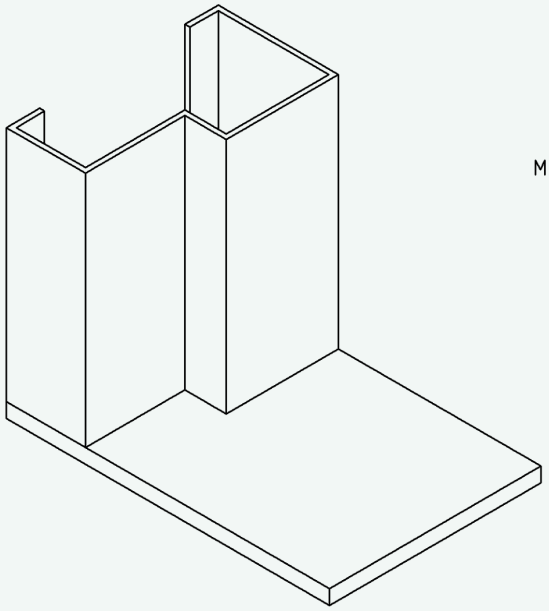


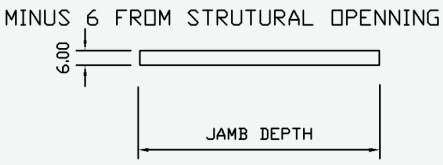


F

CILL TYPE F

This type of cill sits at the back of the frame. A good cill to choose if a flat low-level cill is required, also if a panic bolt is being used on the door.

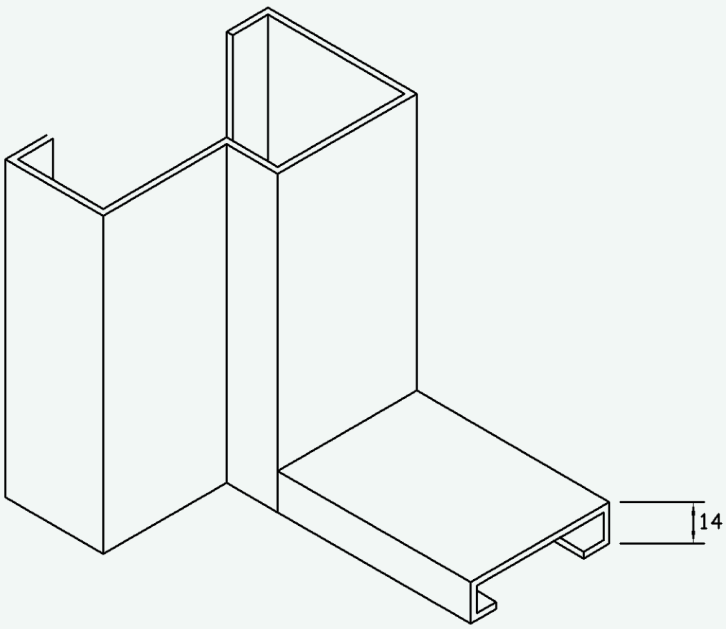




G CILL TYPE G

NON-STANDARD · CHARGEABLE


This type of cill is an aluminium cill with a neoprene seal; it is not a standard cill and is therefore chargeable. It is commonly used on doors where wheelchairs, trolleys, etc are common traffic through the doors.

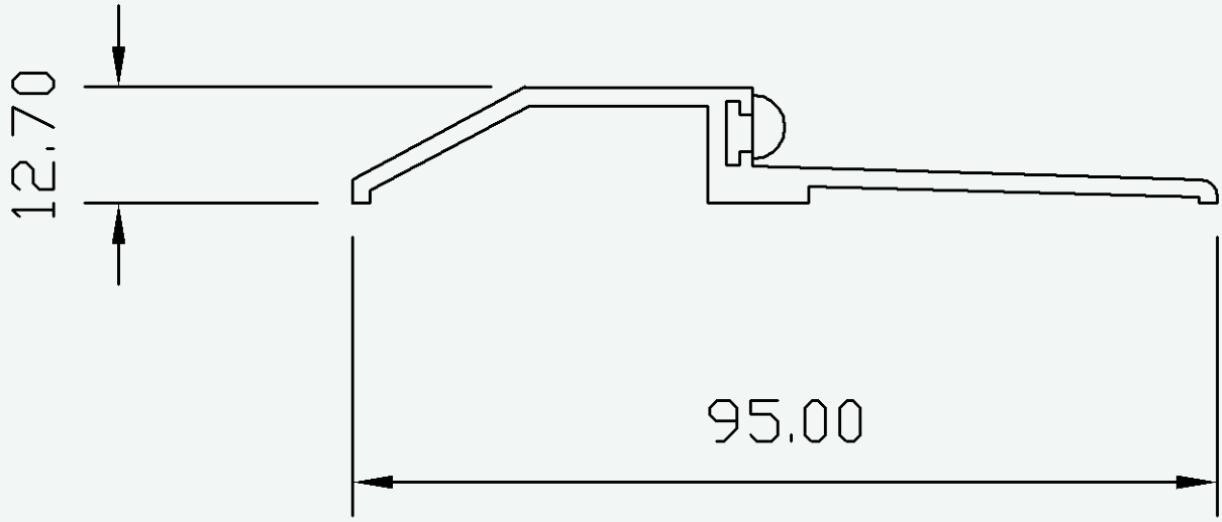

H CILL TYPE H

SUPPLIED AS STANDARD


This type of cill is our most popular of all the cills. It is similar to the 'F' type but it has a leading face which fits under the door. Good for every kind of purpose, particularly panic bolts. If you do not specify a different cill, this will come as standard.

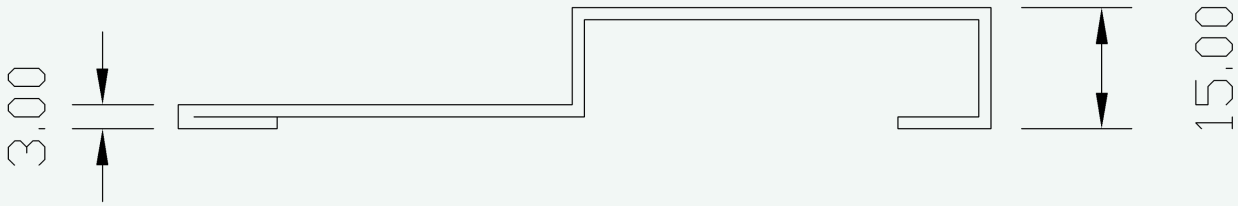

J

CILL TYPE J

This type of cill has a sloping leading face which fits under the door.

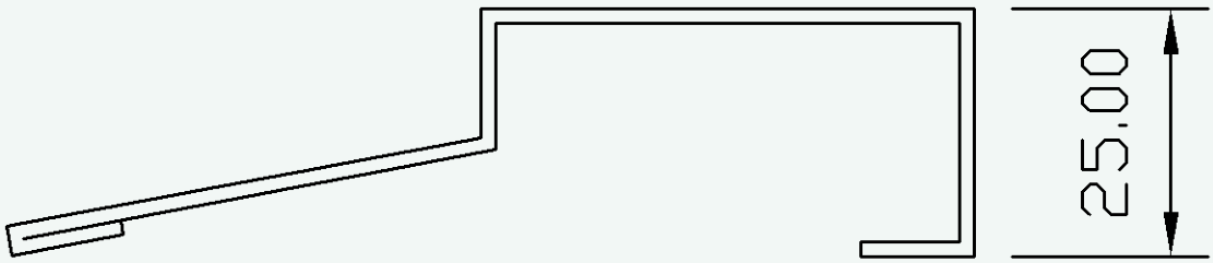

CILLS AT A GLANCE

TYPE	BEST FOR	
A	Raised floor outside — lets the door swing clear	
B	Inward-opening doors only — slope sheds rain to the outside	
C	Wheelchair and trolley traffic	
D	Wheelchair and trolley traffic	
E	6mm flat bar under the frame — unfinished or uneven floors	CHARGEABLE
F	Flat, low-level cill at the back of the frame — suits panic bolts	
G	Aluminium with neoprene seal — wheelchair and trolley traffic	CHARGEABLE
H	Our most popular cill — every purpose, particularly panic bolts	STANDARD
J	Sloping leading face that fits under the door	