




Wall time vs dt — $O(1/dt)$ scaling expected

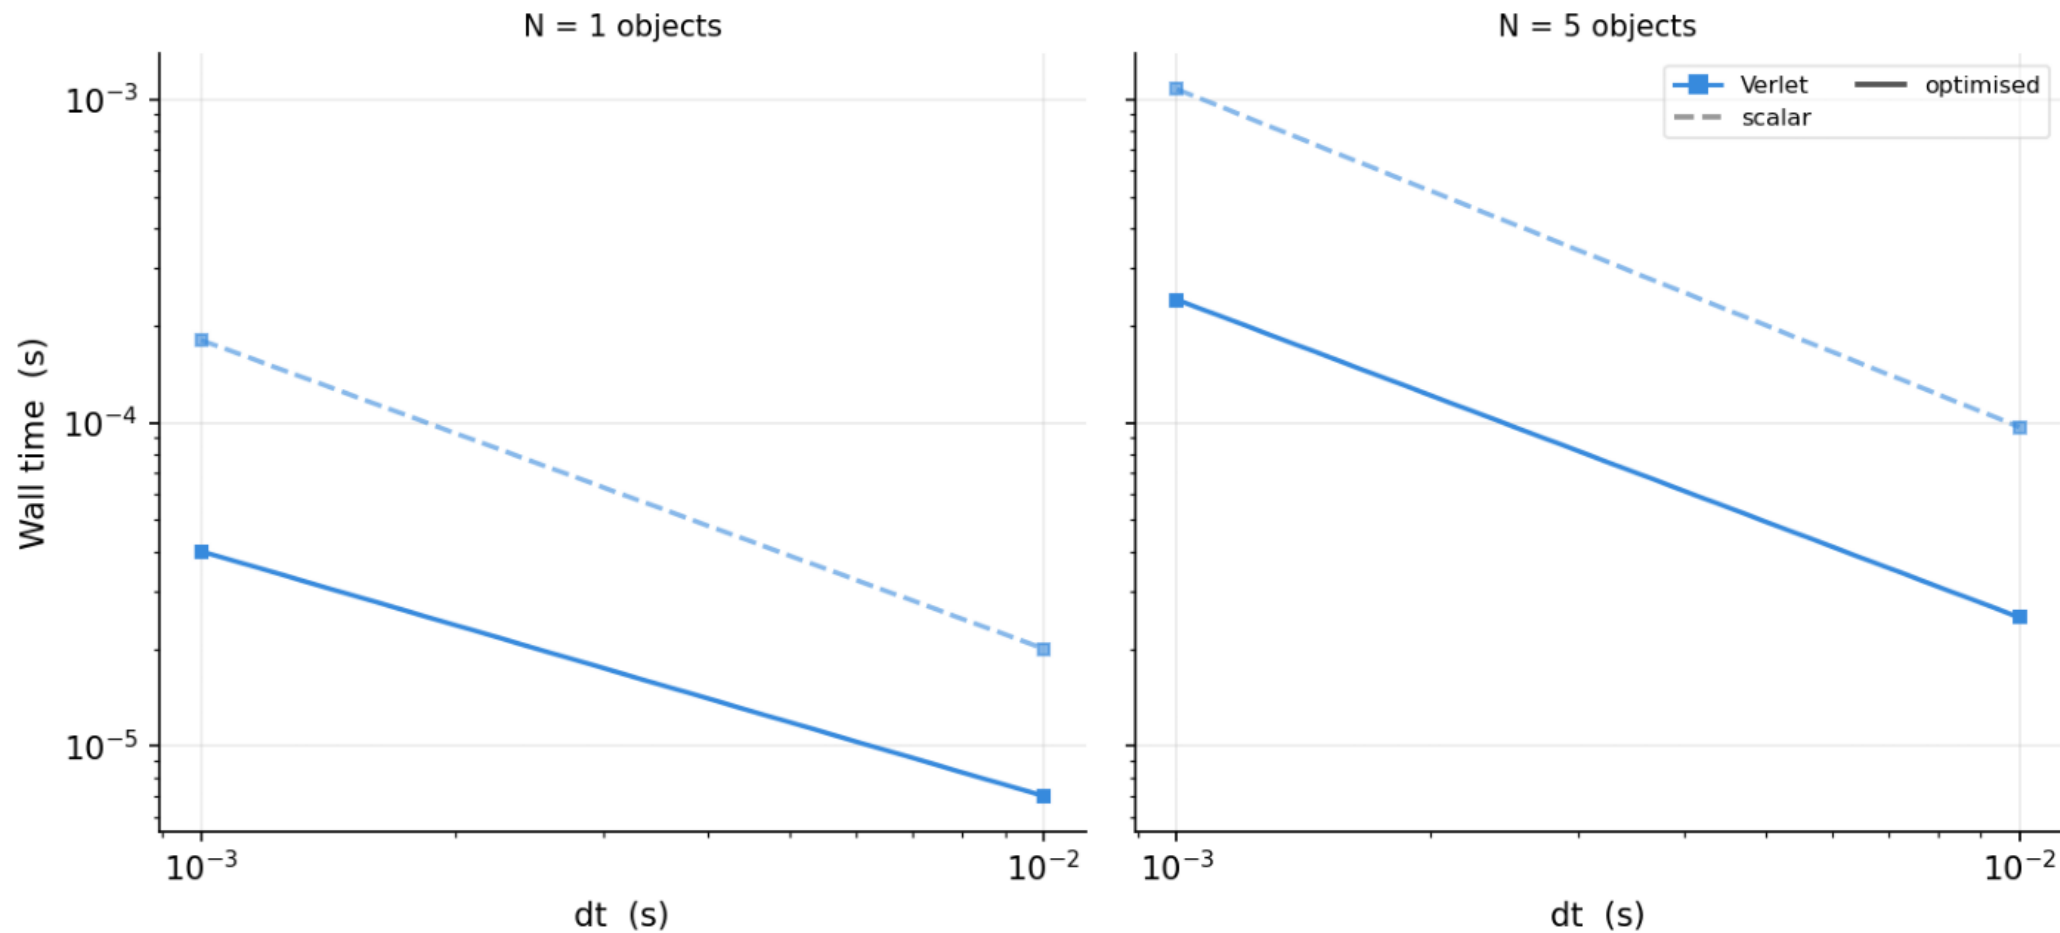


Wall-time scaling with object count — $O(N^2)$ collision expected
($dt = 1.00e-03$ s)

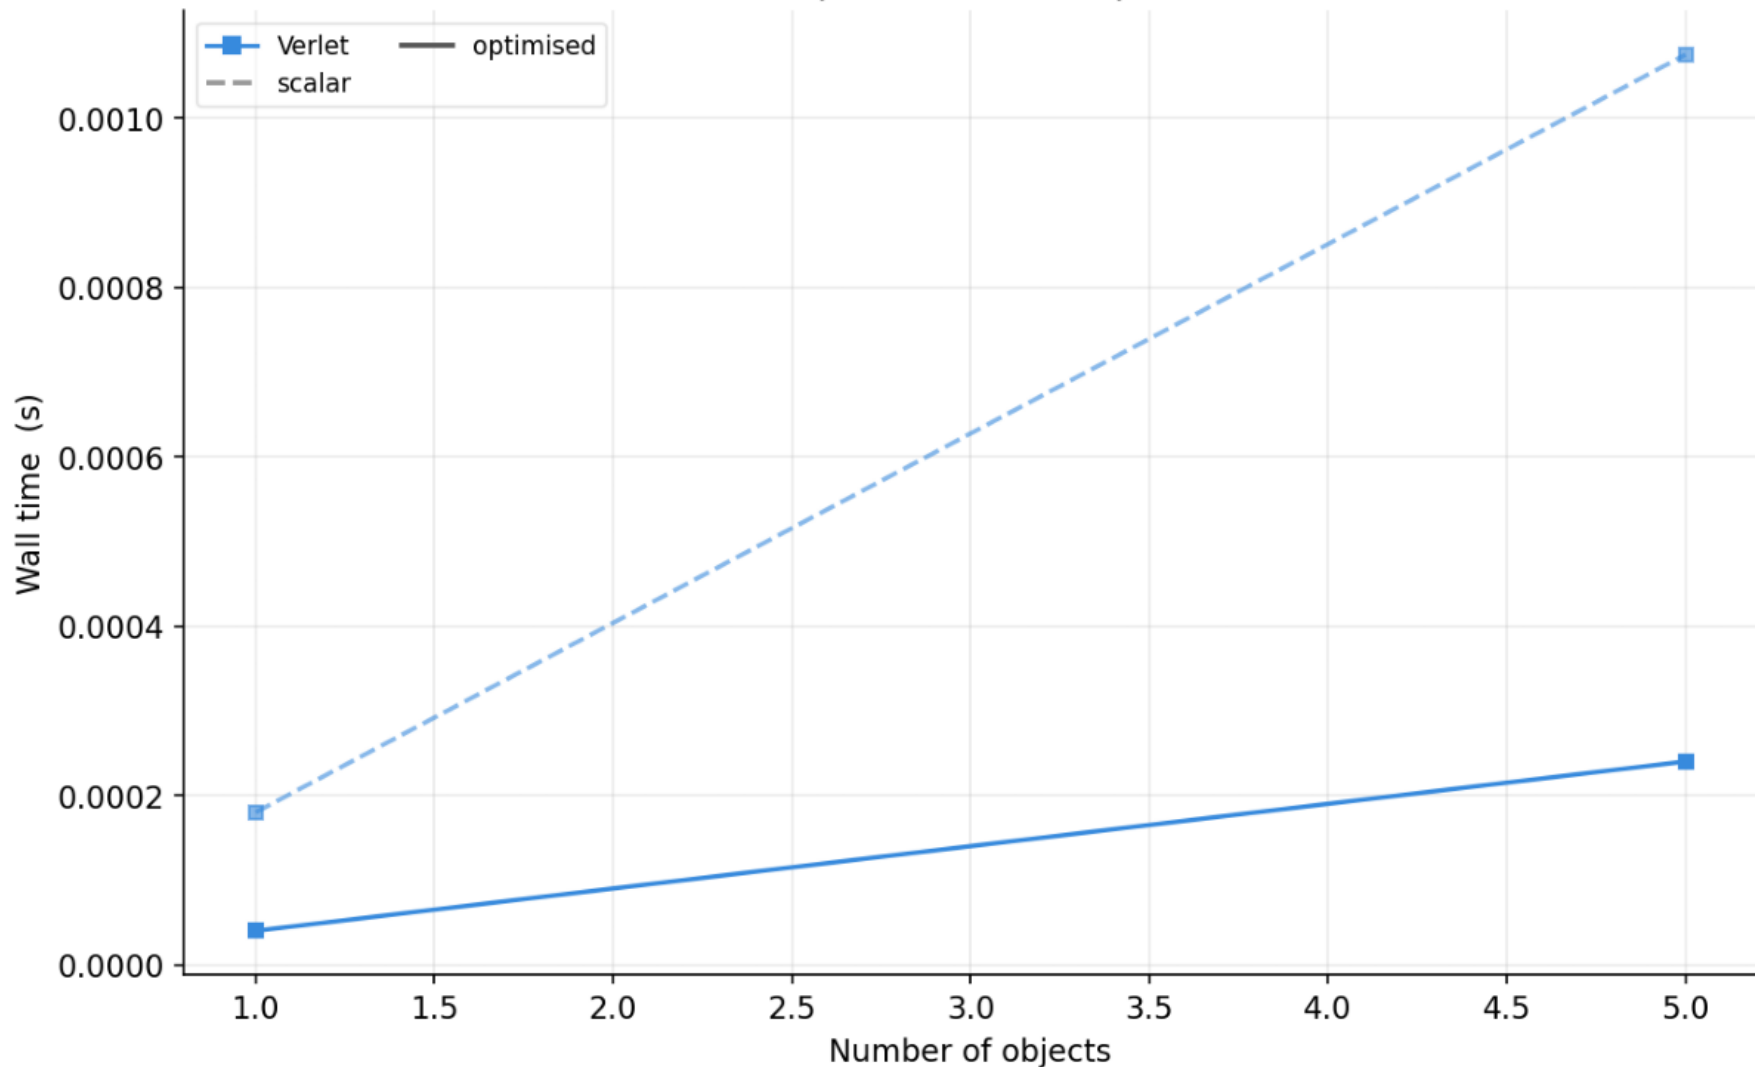


Step time vs dt (plateau at fine dt = true per-step cost)

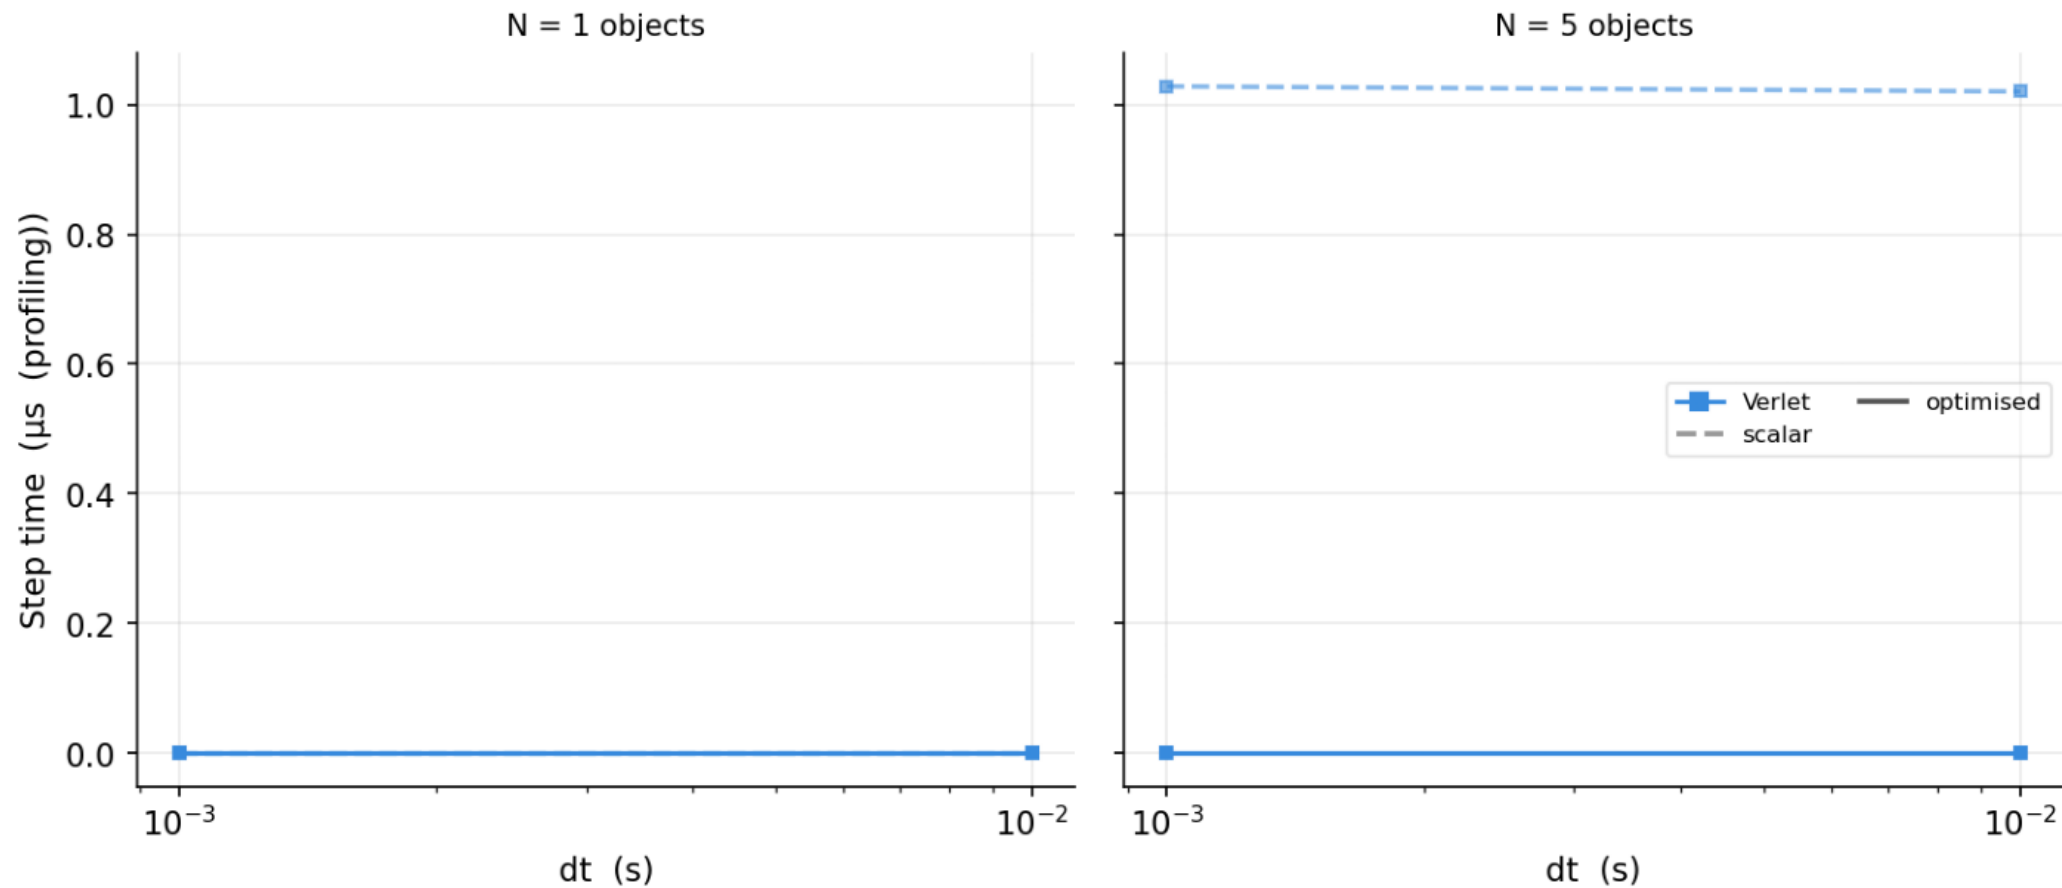


Step-time scaling with object count
($dt = 1.00e-03$ s)

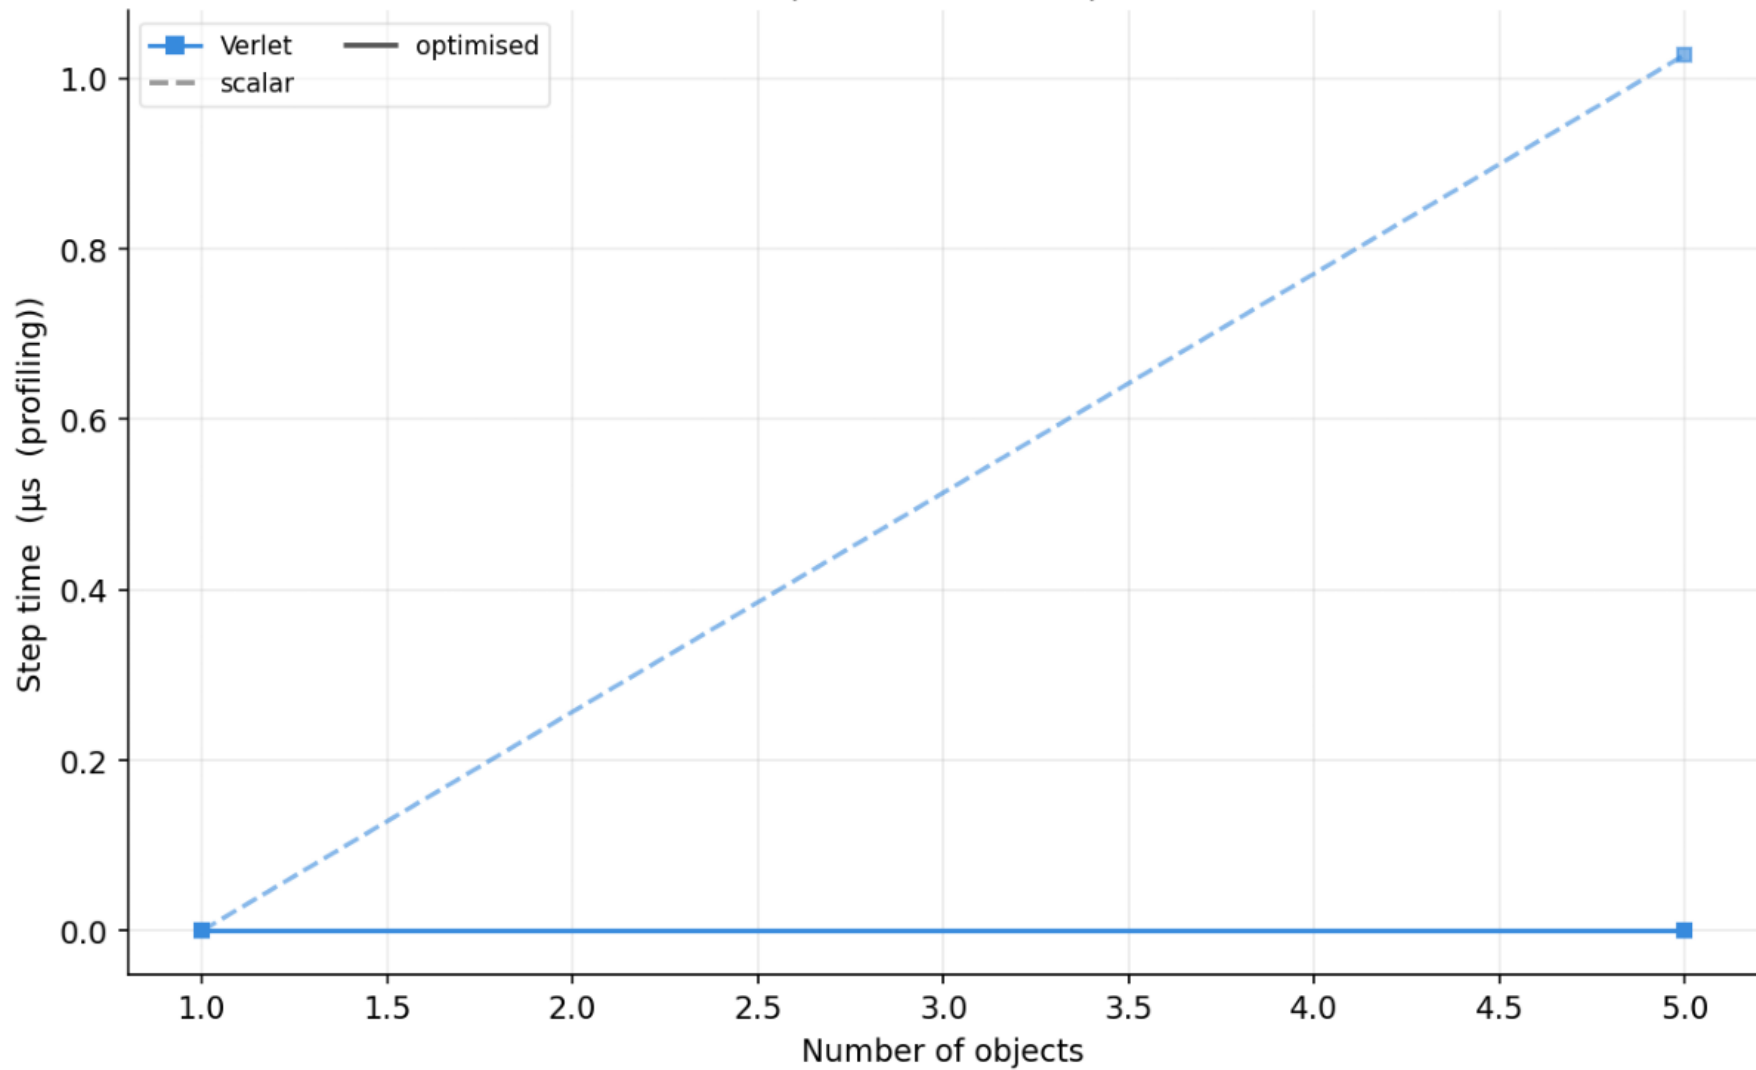



Per-step jitter vs dt (low CV → regular cost)

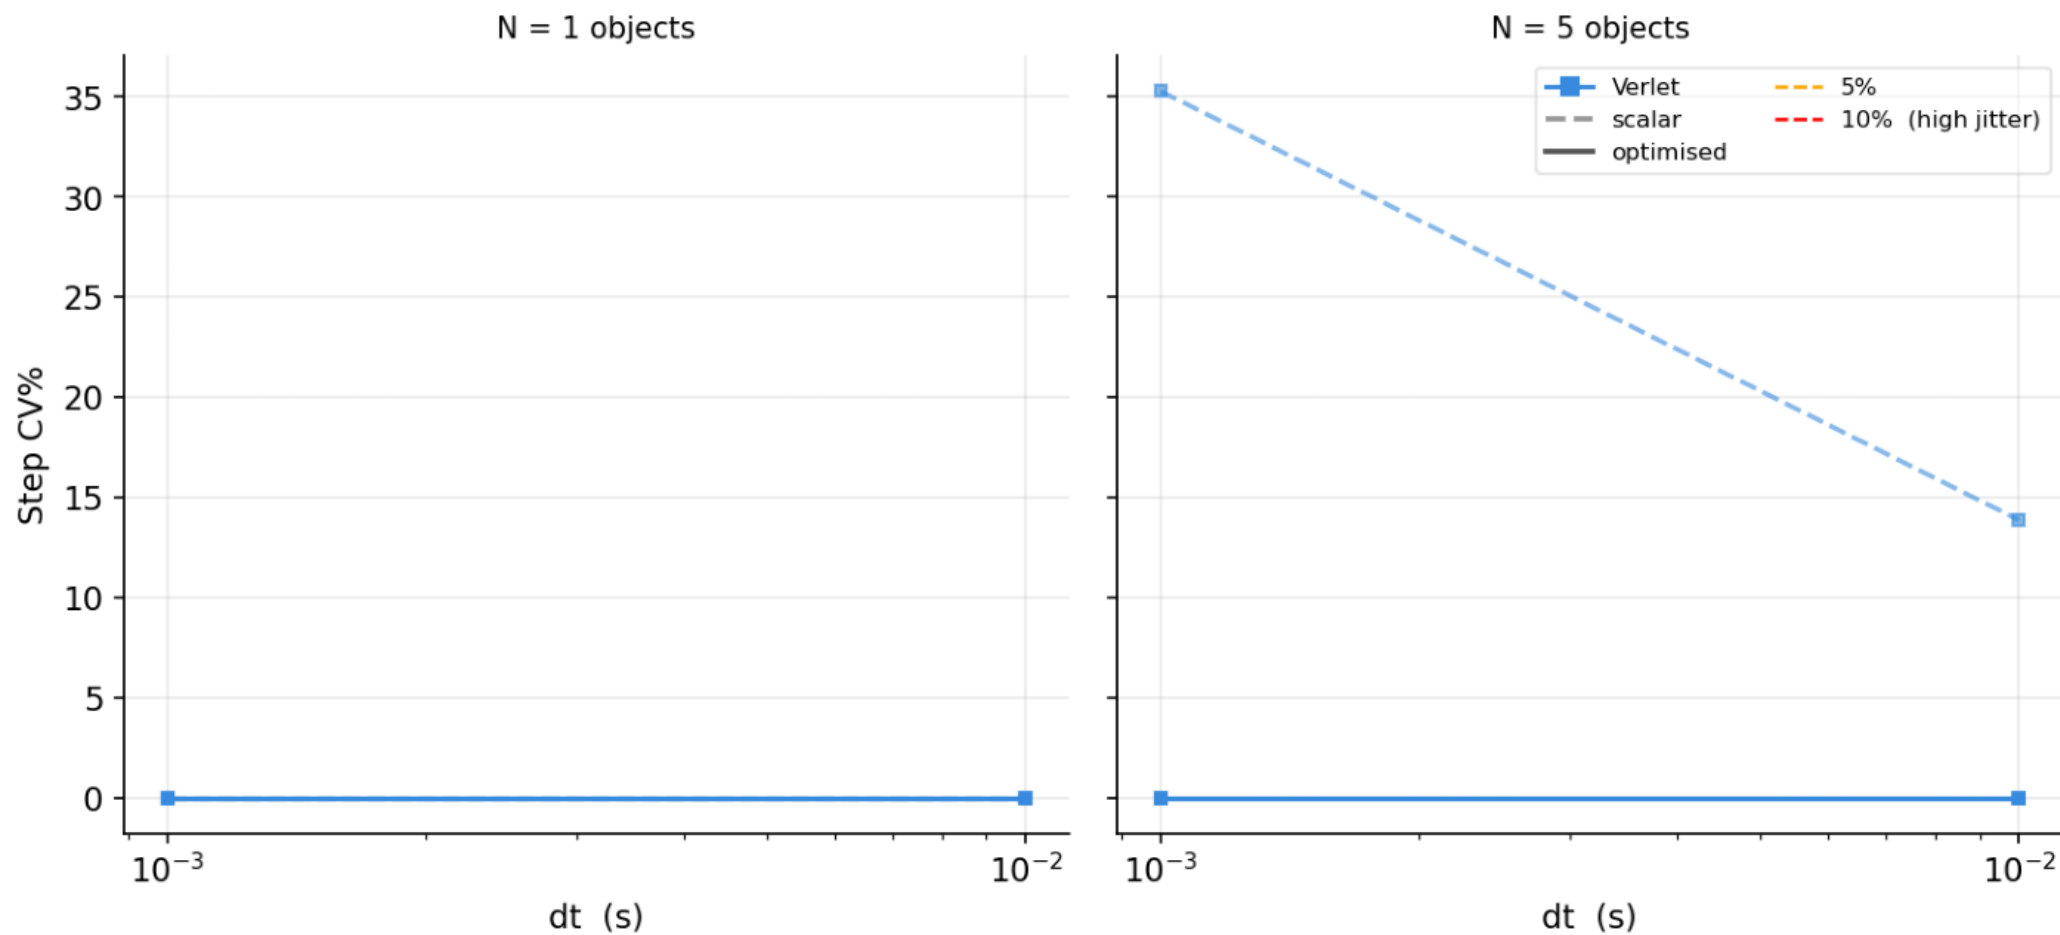

Per-step jitter vs object count
(dt = 1.00e-03 s)

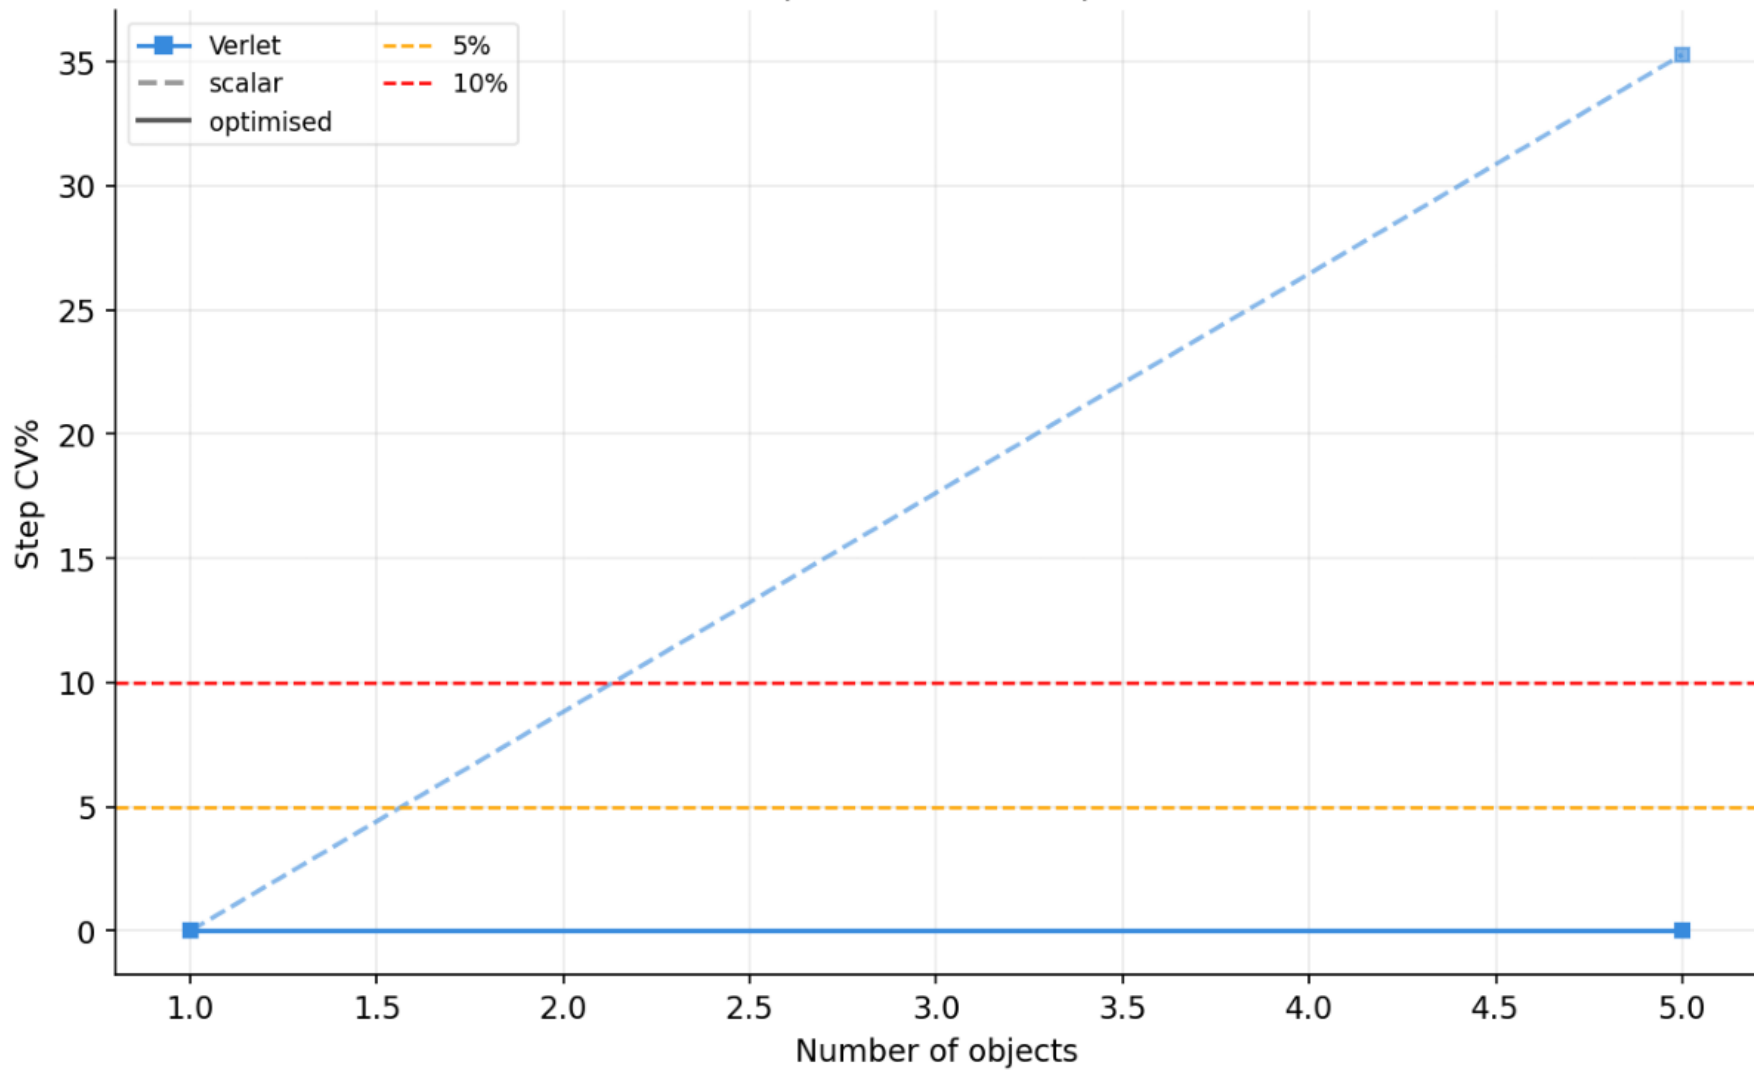

Scalar → Optimised wall-time speedup vs dt (> 1 = optimised wins)

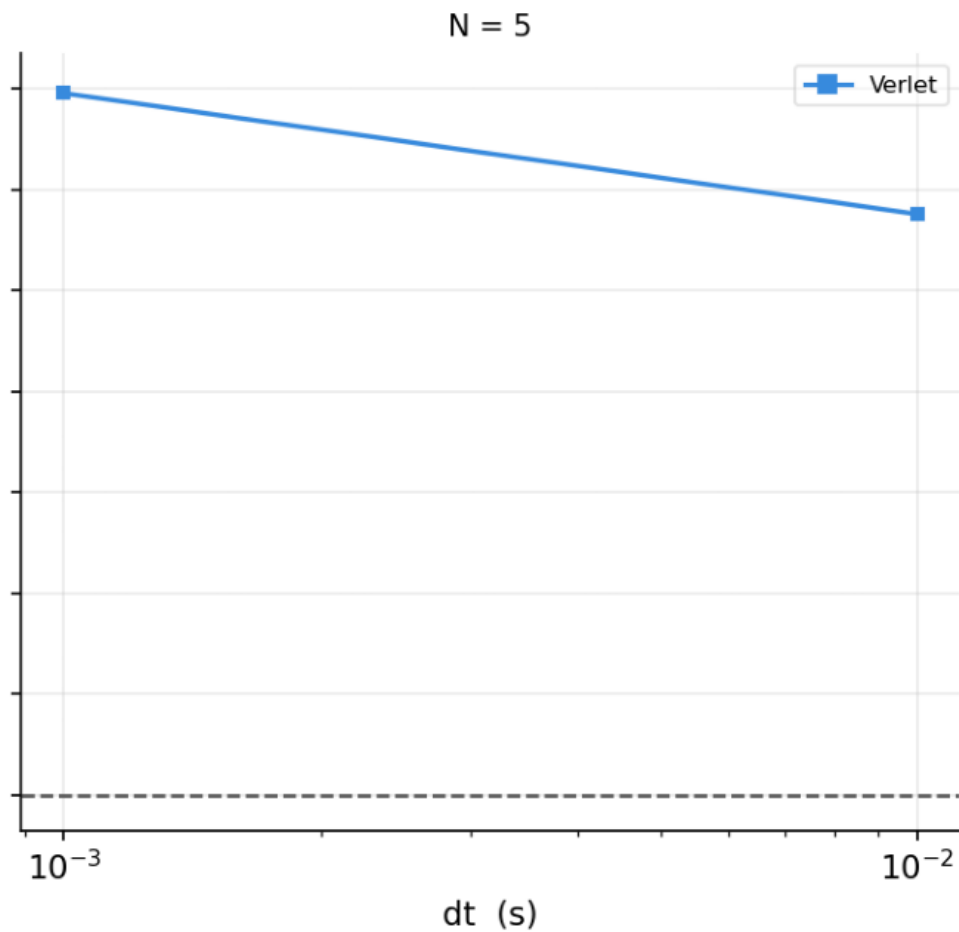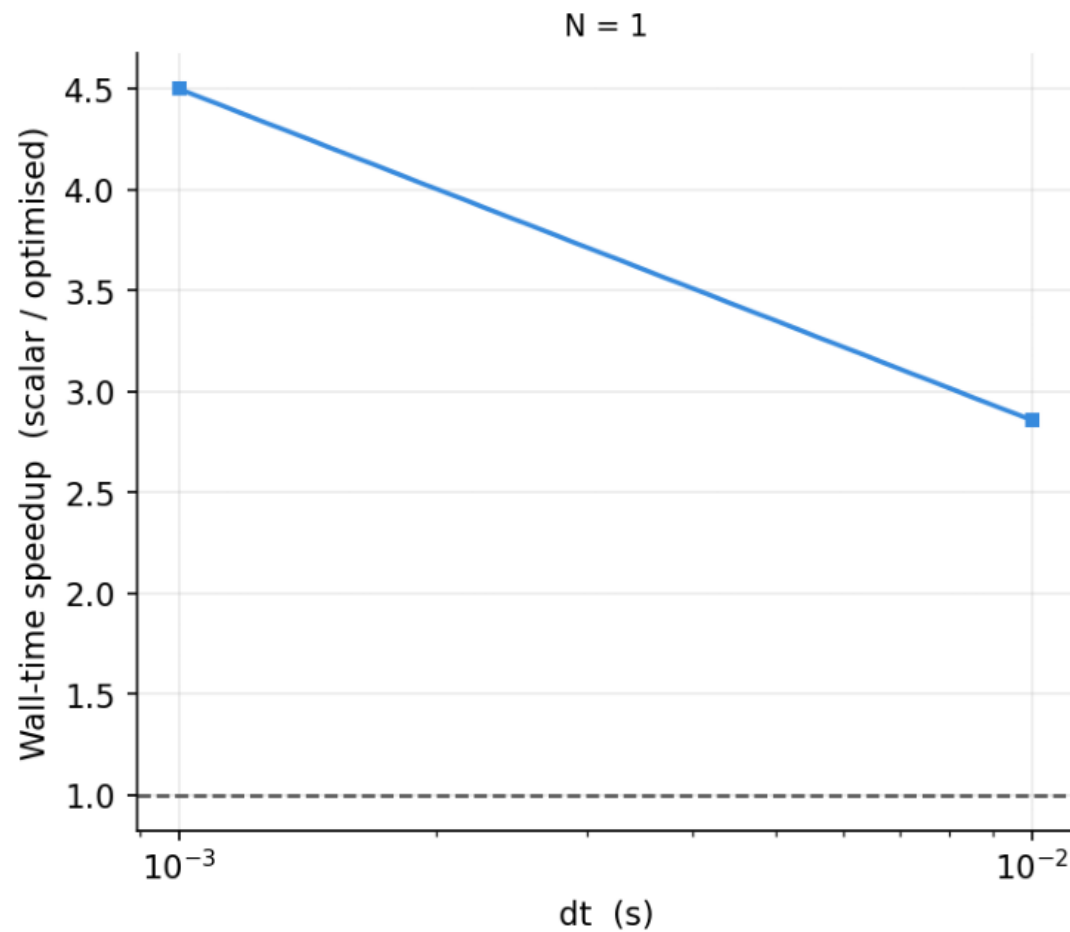

Speedup vs object count (dt = 1.00e-03 s)

solid = wall-time · dashed = step-time

