




TECHNICAL DATA SHEET

Konica Chrome Centuria 200 SRM Film

FEATURES

Konica Chrome CENTURIA 200 is an ISO 200/24° color slide film balanced for daylight. It is easy to use and suitable for all kinds of shooting applications. The Konica Chrome CENTURIA series utilizes Konica's latest emulsion technologies such as PDF (Precisely Divided Function) Crystal technology, and a new yellow coupler. Combined with the other technologies introduced with Centuria series films, these new technologies allow Konica Chrome Centuria 200 to achieve a completely new level of image quality, with superior granularity, gradations, and color reproduction, and. Additionally, the film has extremely high raw film storage stability. These features make this a highly versatile color slide film suitable for many purposes, including nature photos, snapshots, portraits, and commercial work.

LAYER STRUCTURE

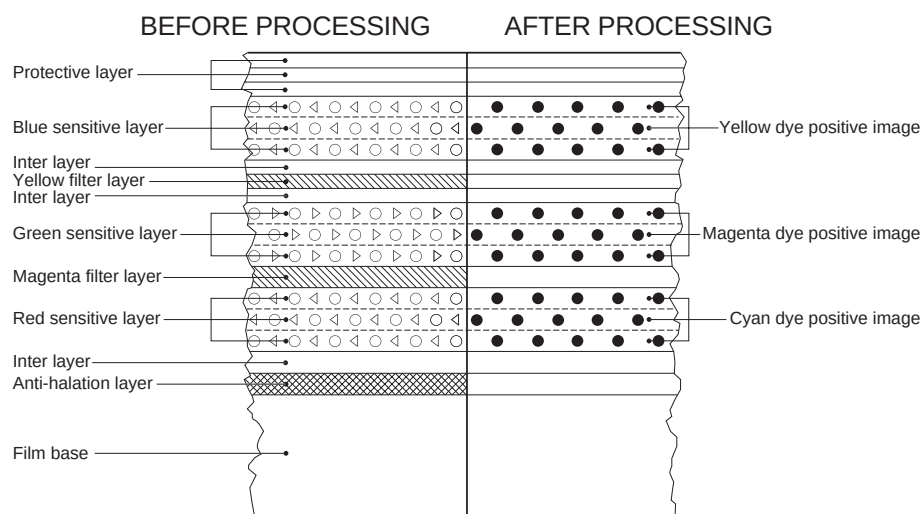

FILM BASE

Triacetate base

FILM SIZES AVAILABLE

135 size: 24 • 36 exp.

FILM SPEED

EXPOSURE CONDITIONS

Konica Chrome CENTURIA 200 is designed for use with daylight and electronic flash.

While color-balanced for daylight, this film is designed to retain optimum spectral sensitivity and yield satisfactory results when exposed under tungsten or fluorescent light, as well. For best results with these light sources, however, the use of appropriate filters is recommended.

Light Source		ISO Speed	Light Balancing Filter
Daylight or Electronic Flash		200/24°	None
Tungsten (3200K)		50/18°*	Wratten No. 80A
Fluorescent Lamp	Daylight (D)	100/21°*	CC10M+CC30R
	White (W)	120/22°*	CC30M

*Includes the exposure factor to obtain best color results without special printing.

RECIPROCITY CHARACTERISTICS

A wide range of shutter speeds (i.e. 1/10000—4 sec.) can be used without loss of film speed and tone reproduction.
To compensate for reciprocity failure, use the following data as a guide:

RECIPROCITY FAILURE COMPENSATION GUIDE

Exposure time (in seconds)	1/10000—4	16	32	64
Exposure Compensation	None	stop+1/3	+2/3	+1
Color Compensating Filters	None	CC05C	CC05C	CC10C

DAYLIGHT EXPOSURE

EXPOSURE GUIDE TABLE: Outdoors under daylight.

Conditions	Bright sunlight (Seascape, Snow scene)	Bright sunlight	Hazy sunlight	Cloudy bright	Cloudy dull, Open shade
Lens opening	f/22	f/16	f/11	f/8	f/5.6
Shutter speed	1/250 sec.	1/250 sec.	1/250 sec.	1/250 sec.	1/250 sec.

EXPOSURE

This table is applicable for exposures from 2 hours after sunrise to 2 hours before sunset.

The use of an exposure meter is highly recommended in cloudy weather or in open shade since light intensity differentials are in continual flux.

Apertures increased by one or two stops are usually suitable for back-lighted, close-up subjects.

ELECTRONIC FLASH EXPOSURE

No filter required.


To determine the lens opening, divide the guide number by the flash-to-subject distance.

Lens Aperture (f-number) =
$$\frac{\text{ISO 200 Electronic Flash Guide Number}}{\text{Electronic Flash-to-Subject Distance (meters or feet)}}$$


STANDARD PROCESSING Konica Color Chrome Film Process CRK-2 or Process E-6

SPECTRAL SENSITIVITY • CHARACTERISTIC CURVES

SPECTRAL SENSITIVITY

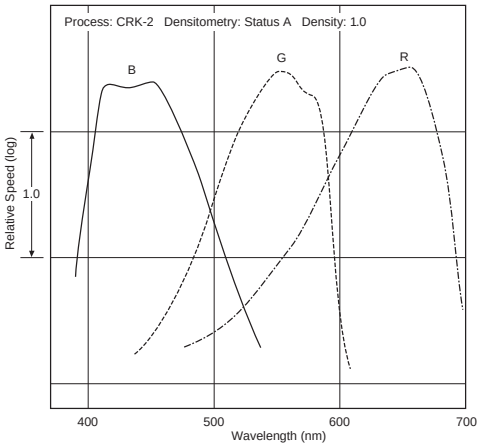



CHARACTERISTIC CURVES

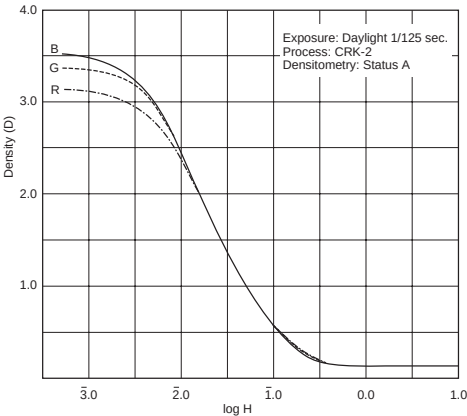

GRANULARITY

DIFFUSE R.M.S. GRANULARITY: 11
Aperture diameter: 48mm
Diffuse transmission density (NET): 1.0

SPECTRAL DYE DENSITY CURVES • SHARPNESS

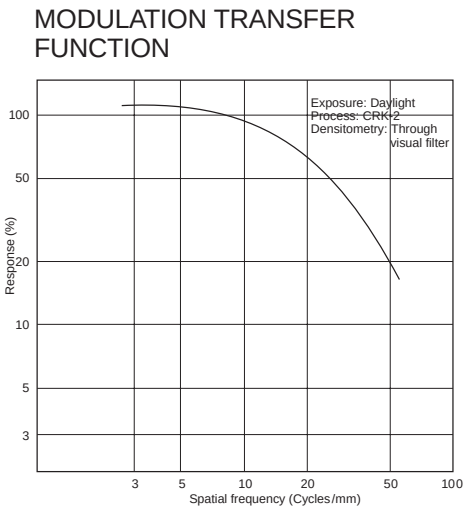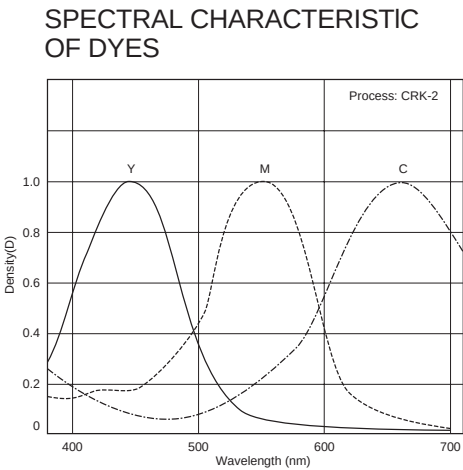

RESOLVING POWER

Test-Object Contrast 1.6:1 — 50 lines/mm
Test-Object Contrast 1000:1 — 125 lines/mm

PRECAUTIONS

Konica Chrome CENTURIA 200 film features enhanced raw stock and latent image stability, and resistance to harmful gases. However, the following precautions must be observed in handling color slide films:

1. HANDLING OF FILM: Avoid direct sunlight or other strong light when loading or unloading camera.
2. PROCESSING: Process promptly after exposure to minimize effects of latent image change.
3. STORAGE OF FILM: Keep unused film in a cool, dry place such as a refrigerator. (Storage at below 10°C or 50°F is recommended.)
Avoid the following conditions:
 - i) High temperature and high humidity.
 - ii) Exposure to harmful gases such as formaldehyde.
 - iii) Leaving film in camera for extended periods.
4. EXPIRATION DATE OF FILM: For best results, process before expiration date stamped on package.
5. STORAGE OF PROCESSED FILM: Keep processed film in a cool, dry and dark place to minimize fading of dyes.

NOTICE: The characteristic curves and data in this publication represent test results obtained under the specified conditions of exposure and processing. The manufacturer reserves the right to modify product characteristics at any time.