
# Customer Information Sheet

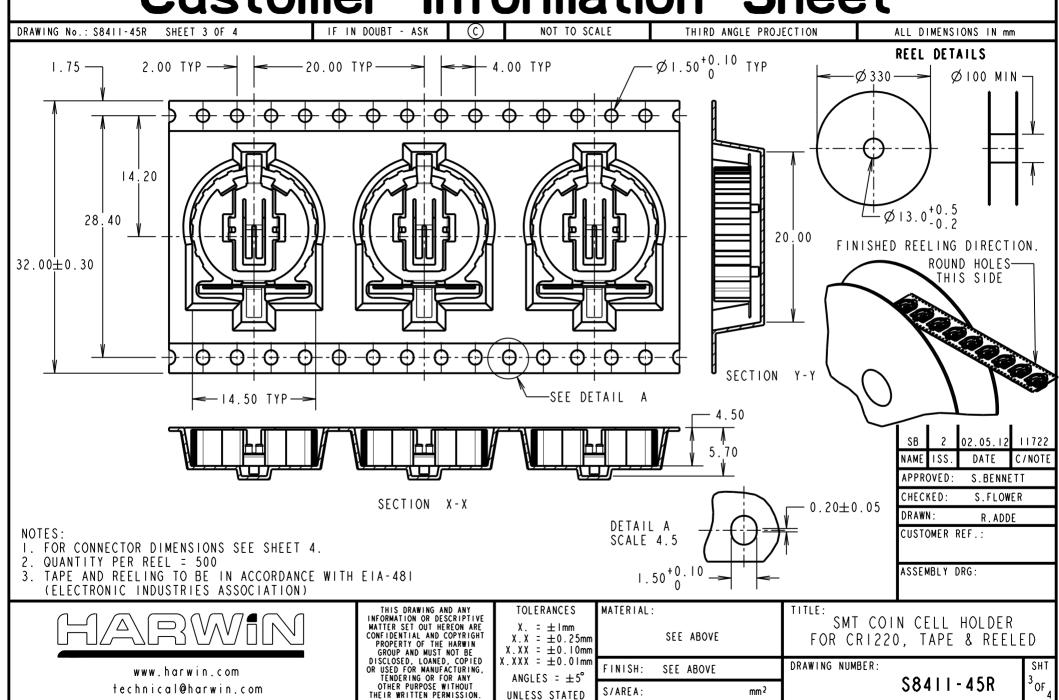

## Customer Information Sheet

DRAWING No.: \$8411-45R IF IN DOUBT - ASK NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm SHEET 4 OF 4

#### SPECIFICATIONS:

MATERIAL:

MOULDING: PPS. UL94V-0. BROWN

CONTACT: PHOSPHOR BRONZE

FINISH:

CONTACTS = GOLD FLASH OVER NICKEL

ELECTRICAL:


CONTACT RESISTANCE =  $12 \text{m}\Omega$ 


INSULATION RESISTANCE = 500MO


DIELECTRIC VOLTAGE = 500V AC FOR I MINUTE


FNVIRONMENTAL .

OPERATING TEMPERATURE = -40°C TO + 105°C



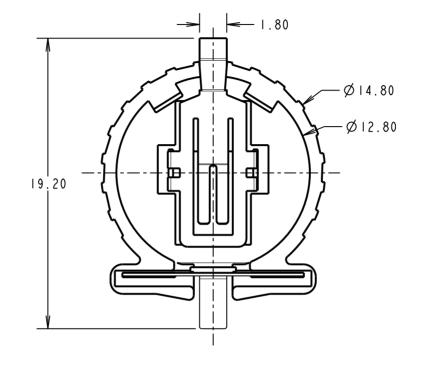







mm<sup>2</sup>

SB	2	02.05.12	11722		
NAME	188.	DATE	C/NOTE		
APPROVED: S.BENNETT					
CHEC	KED:	S.FLOWER			
DRAW	١:	R.ADDE			
CUSTOMER REF.:					
ASSEN	MBLY (	ORG:			

#### NOTES:

- I. SUITABLE FOR THE FOLLOWING COIN CELL CRI220
- 2. ALL TOLERANCES ARE  $\pm 0.20$  UNLESS OTHERWISE STATED.



www.harwin.com technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING. TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION

TOL	ERA	NC	ES /
		± Ir	
X . X X . XX			. 25mm . 10mm
X.XXX			. 0 I mm
ANG	LES	=	₹5°
			•

UNLESS STATED

MATERIAL: SEE ABOVE

FINISH: SEE ABOVE

S/AREA:

TITLE: SMT COIN CELL HOLDER FOR CR1220, TAPE & REELED

DRAWING NUMBER:

SHT

4 OF

S8411-45R

### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Harwin:</u> S8411-45R