



## technical data type **TUBE EM**

**Base:** Impact proof PC housing. IK10

- Free fix mounting bracket.
- Connection: Wieland, Stucchi connector.
- Silicone gasket.

**Diffuser:** Special frosted polycarbonate for a smooth uniform lighting.


- *Optional* : - Frosted PMMA diffuser

**Gear tray:** Aluminium




### Specifications:

- Non-maintained (only EMergency).
- Multi-watt version : 8W / 825 lm - 13W / 1350 lm
- Available in 3000K, 4000K, 5000K
- Ta: +5° till 30°C.

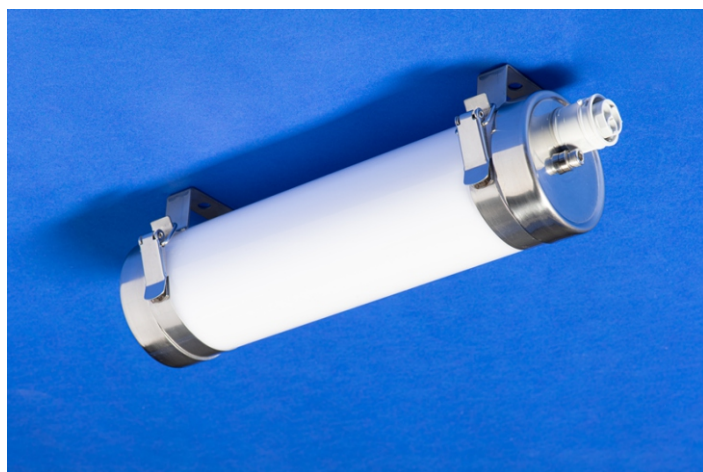

Housing	L	W	H	Lf(mm)	Kg
301	310	80	102	280 - 290	1,0
601	600	80	102	300 - 500	1,7

**Impact strength data:** Tube in PC (IK10)



16/02/2024

**VLUX**

Industrieweg Roosveld  
3400 LANDEN BELGIUM

Tel + 32 11 88 09 00

website [www.vlux.com](http://www.vlux.com)  
ISO 9001 certified company

