

technical data type **BUBALED+**

+ bracket

Body: standard; injected white polycarbonate.

Diffuser : standard; injected opal PMMA or opal polycarbonate.

Impact strenght data of the diffusor :

- Diffuser in PC : > 6Nm (IK08).
- Diffuser in PMMA : > 0.7Nm (IK05).

Bracket : injected polycarbonate.



Buba+ has a pre-mounting installation bracket for quick & easy electrical connection.

Electrical specifications :

- Motion detector.


2 Versions:

Power	Flux
13 W	1275 lm
21 W	2125 lm

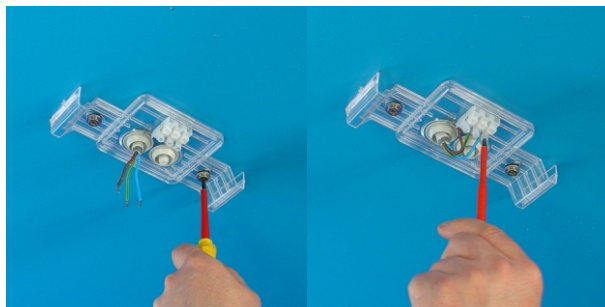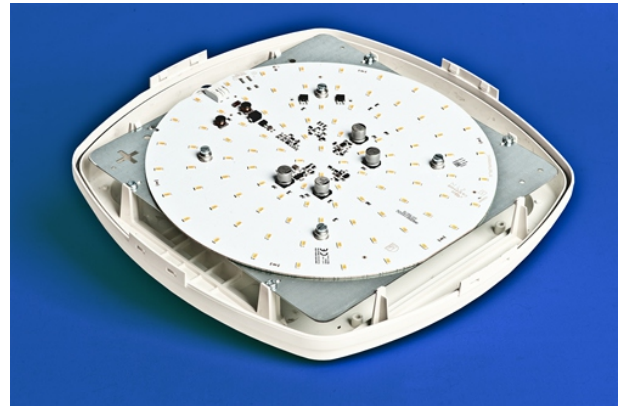

1. Bracket is fixed

2. wires attached to connector.

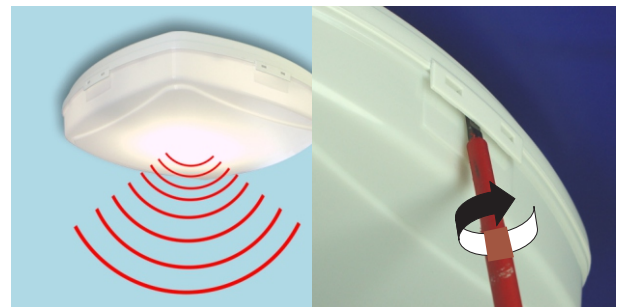


High frequency motion detector.
(Optional)

Easy opening of the diffuser



3. Buba+ is clicked on the bracket.

Two "clicks" for bracket mounting.

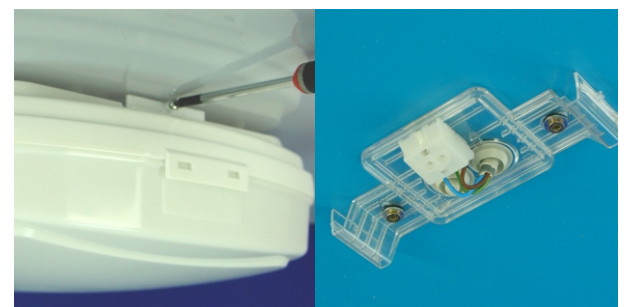



vandal-proof screw
(Optional)

3 poles connector protection cap
(Optional)





V08.09.2017





technical data type **BUBALED+**

+ bracket

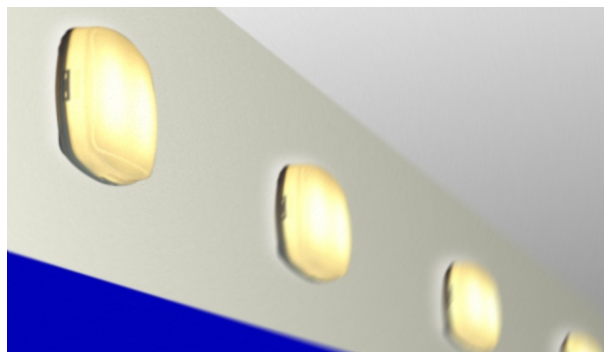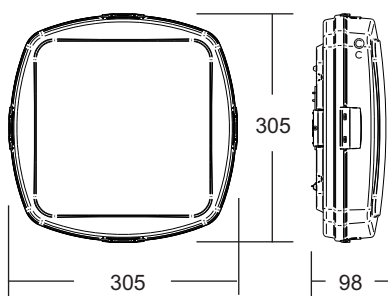

VLUX
Industrieweg Roosveld
3400 LANDEN BELGIUM

Tel + 32 11 88 09 00
Fax + 32 11 83 22 22

The liabilities are bound to the
published informations, which might
be modified without notice.

website www.vlux.com
ISO 9001 certified company.

