



תיקונים ל-PMI



BOARD V2-3

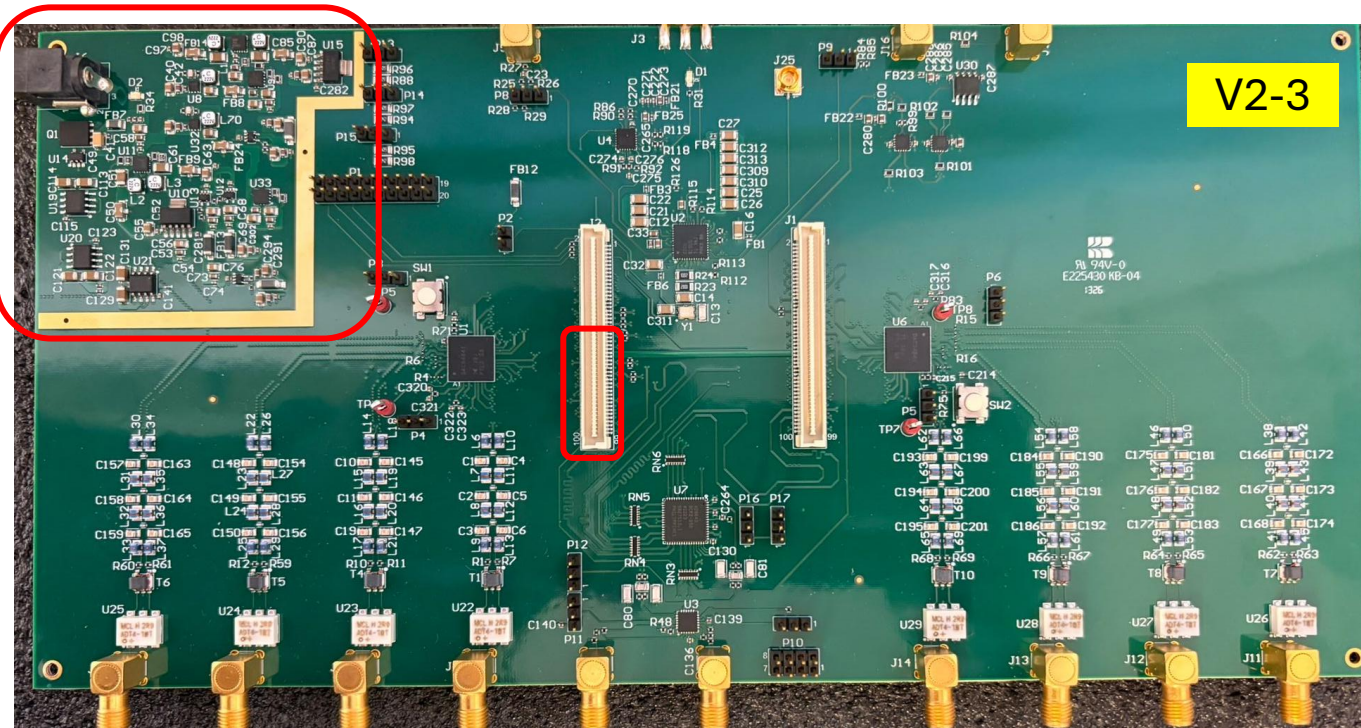



ADC DATAPATH

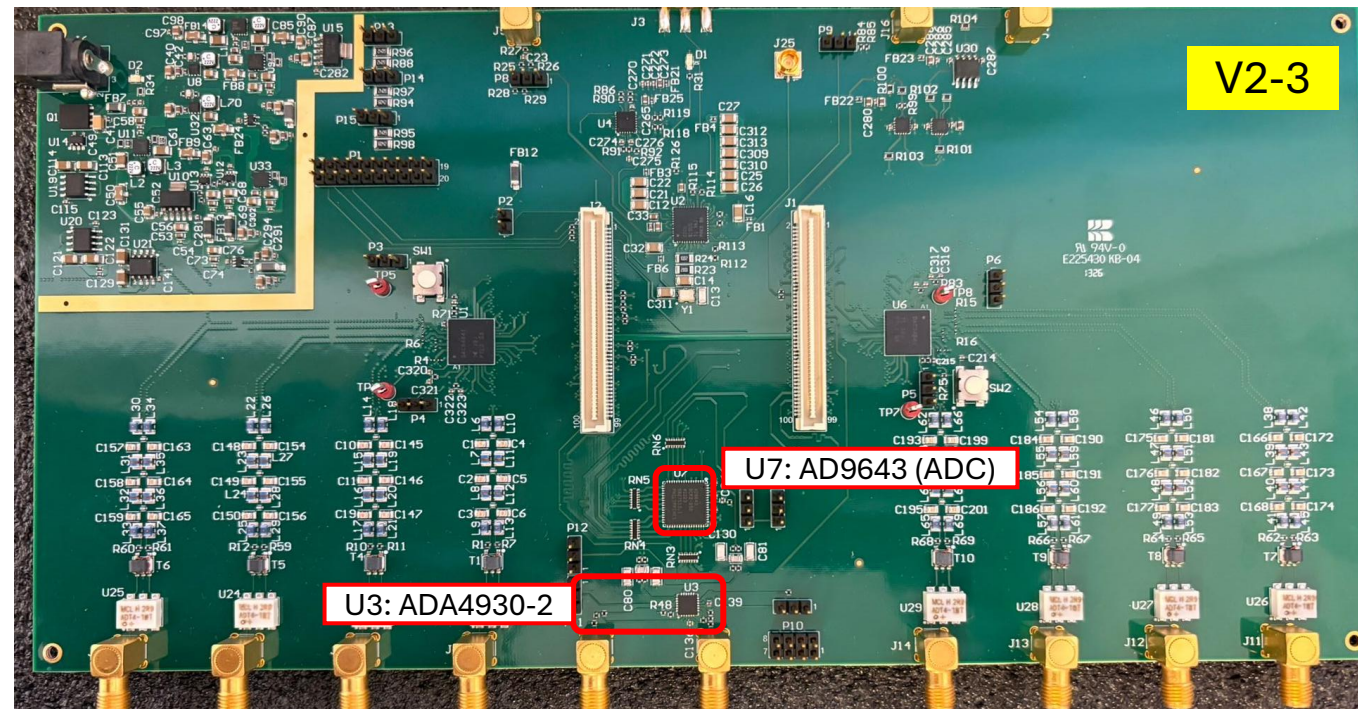


DCK Package
5-Pin SC70
Top View

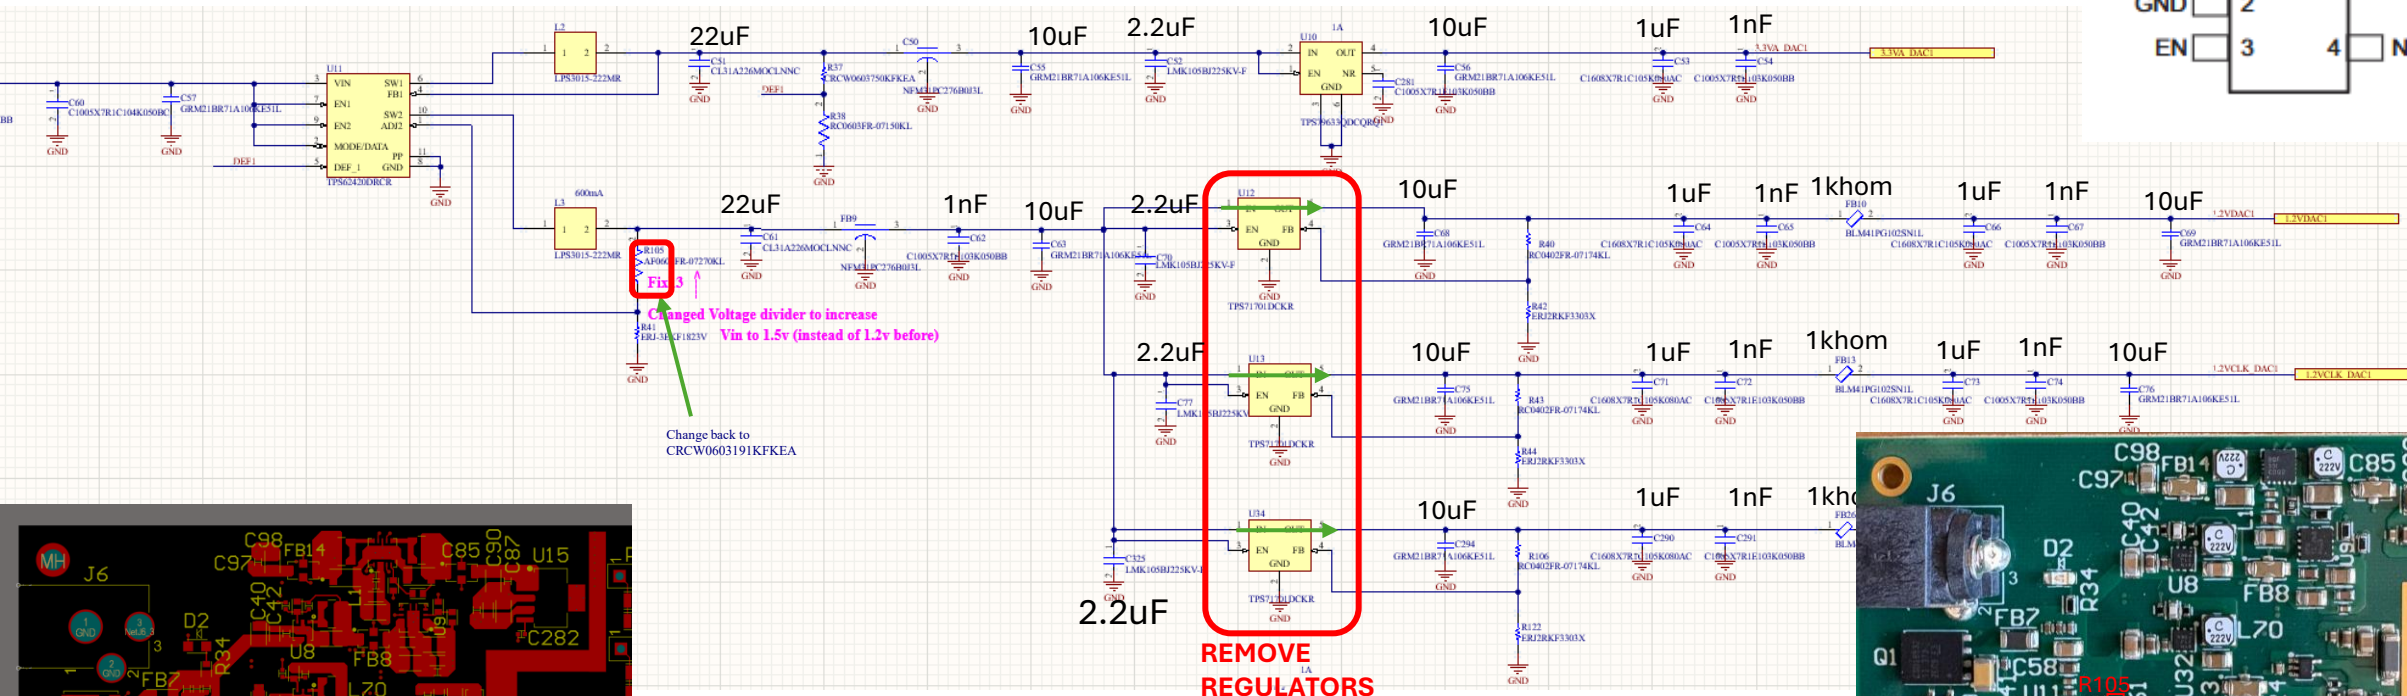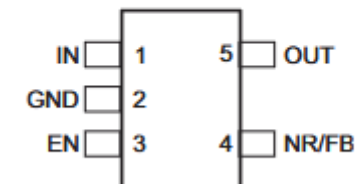

SHORT REGULATOR 1 TO 5 LEG
REPLACE RESISTOR R105

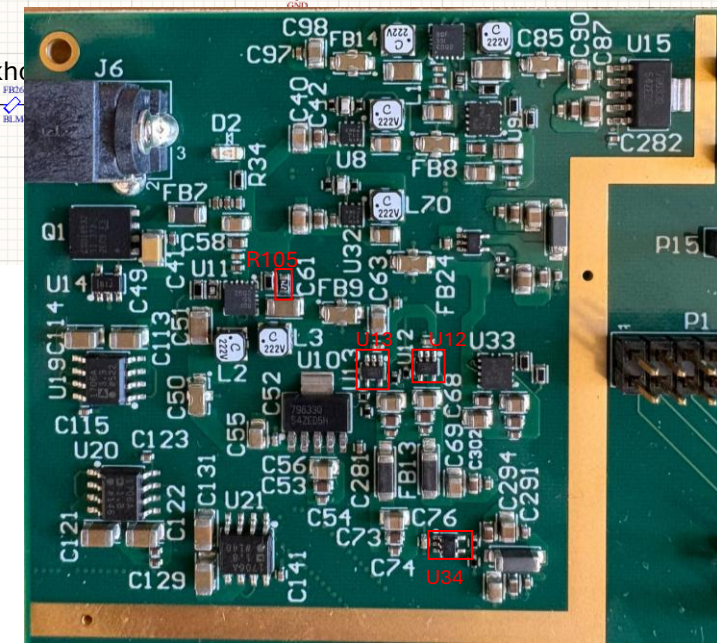
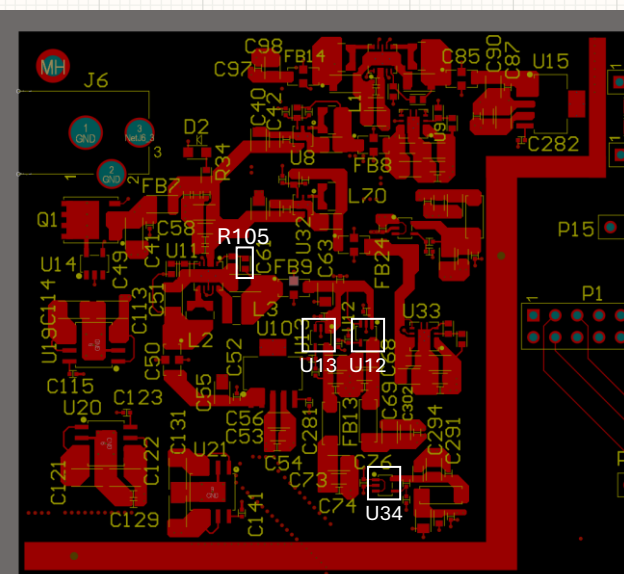


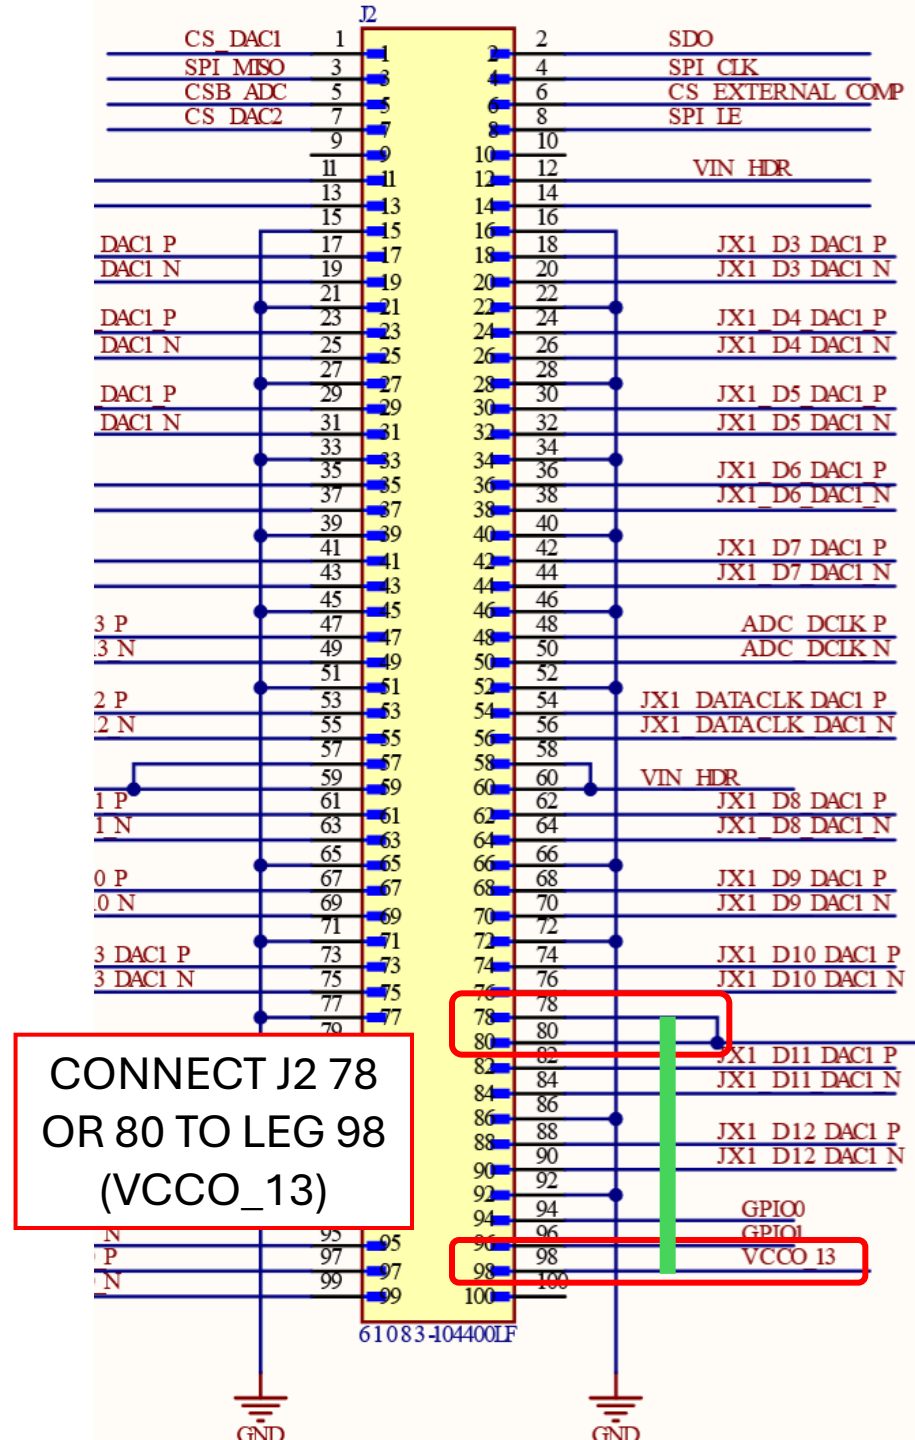

REPLACE R109
WITH 21.3k Ω

Table 1. Sample 1% Resistor Values for Common Output Voltages

V _{OUT}	R ₁	R ₂
0.8 V	0 Ω (Short)	Do not populate
1 V	2.49 k Ω	10 k Ω
1.2 V	4.99 k Ω	10 k Ω
1.5 V	8.87 k Ω	10 k Ω
1.8 V	12.5 k Ω	10 k Ω
2.5 V	21 k Ω	10 k Ω
3.3 V	30.9 k Ω	10 k Ω
5 V	52.3 k Ω	10 k Ω

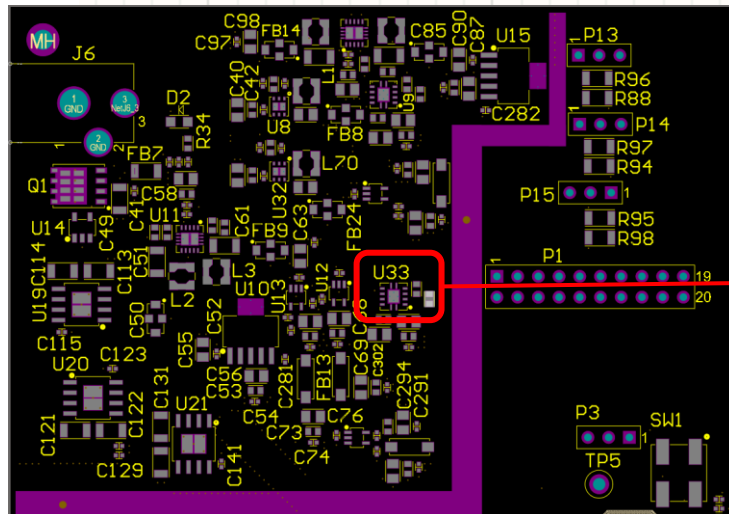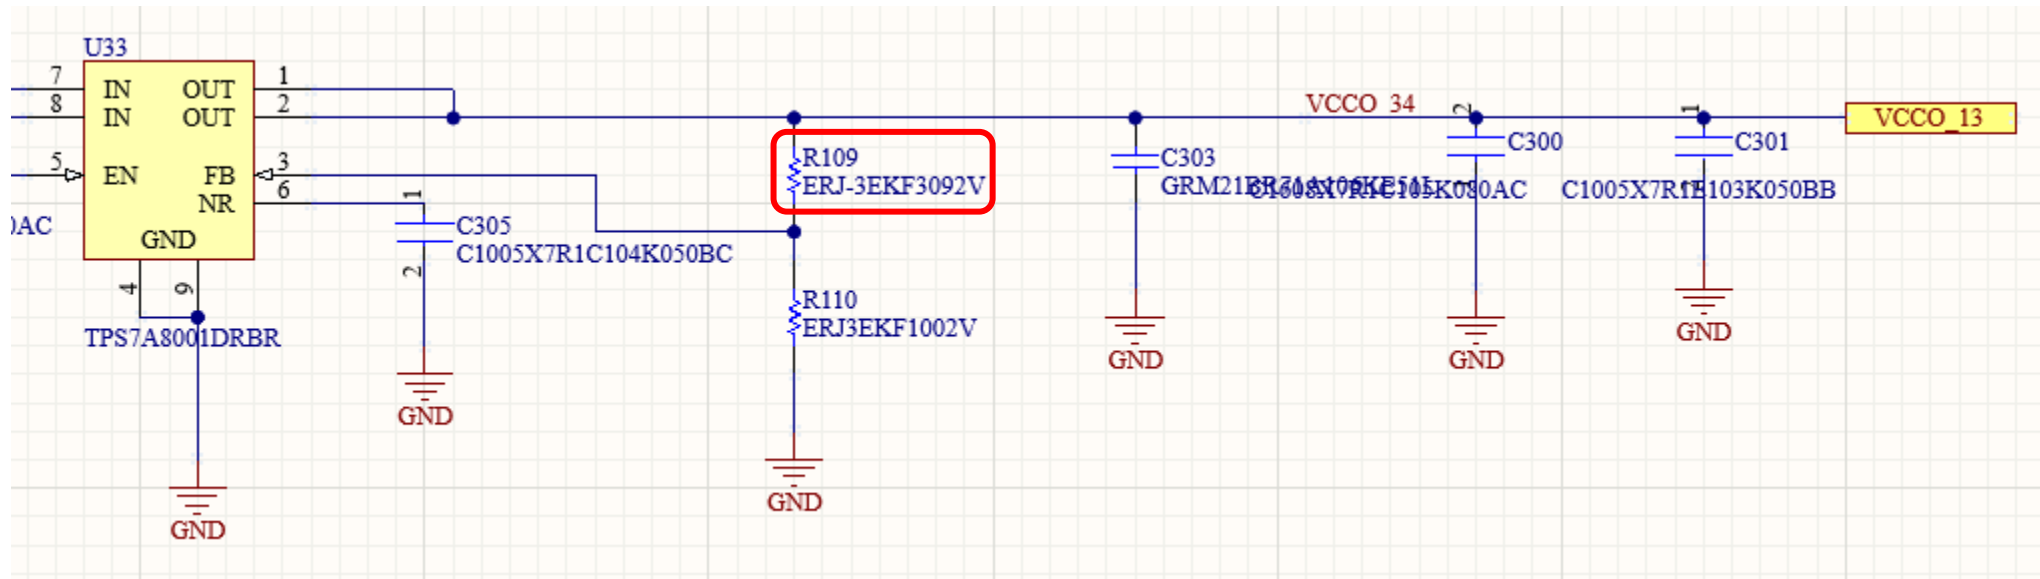

ADC DATA PATH

ADA4930-2

MOVE R81 TO TO BE IN THIS POSITION (SHOULD BE CONNECTED TO LOWER LINE). IN1+ CONNECTED THROUGH 200 OHM TO FB1-

The diagram shows a PCB layout with red traces and yellow component footprints. A large yellow footprint labeled 'R48' is in the center. To its right is a large red footprint labeled 'U3'. Various other components are labeled, including 'R81' (a small footprint on the left), 'R50' (a small footprint near the bottom center), and 'NEW R81 LOC' (a small footprint near the bottom center). The text boxes provide instructions on moving these components and their connections. The background is black, and the traces are red and yellow.

MOVE R50 TO TO BE IN THIS POSITION (SHOULD BE CONNECTED TO LOWER LINE). IN1- CONNECTED THROUGH 200 OHM TO FB1+

