


Notes:

1. All 0.1uF capacitors must be Low-ESR
2. R7, R11, R3 are 1% tolerance
3. L2 must be placed near CPU
4. D0, D1 inputs in TPS2115 have internal pull-ups

Block diagram

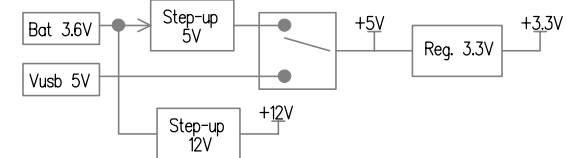

Title: DuinoBot		Part: Power
Page: 4/4	Version: 2.3	Date: 06/2012