





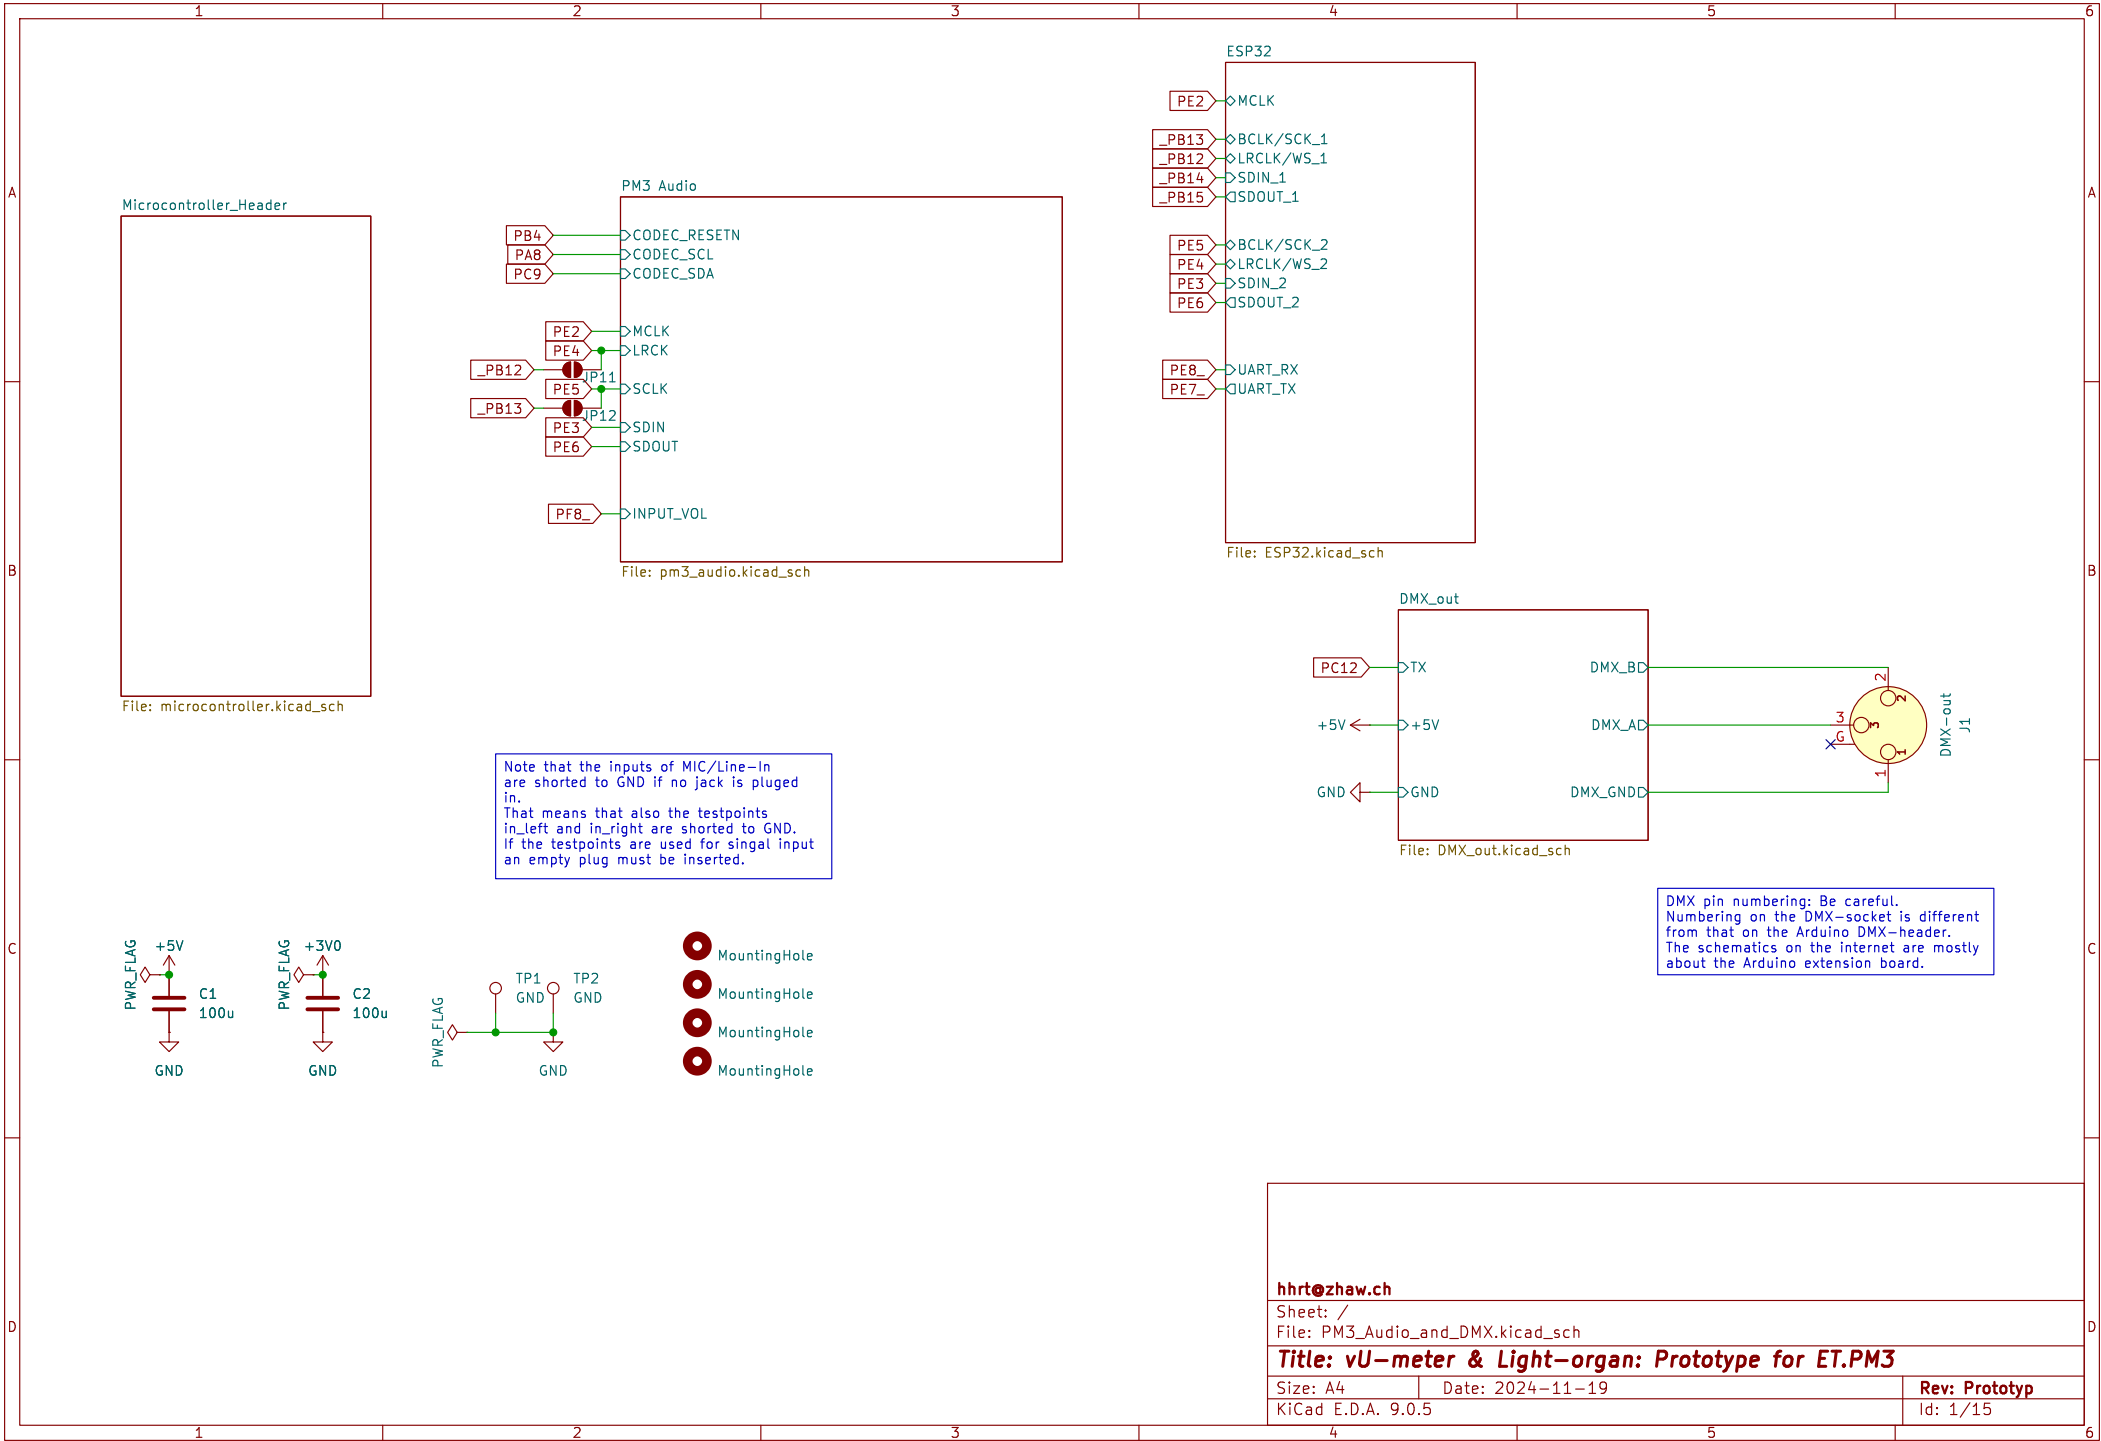



D

Size: A4	Date: 2024-11-19	Rev: Prototyp
KiCad E.D.A. 9.0.5		Id: 2/15

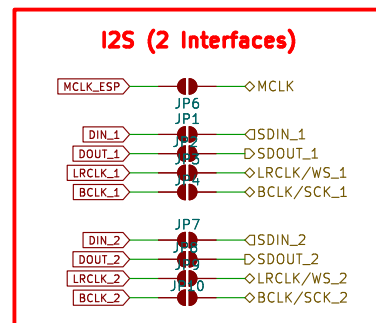

Id: 3/15

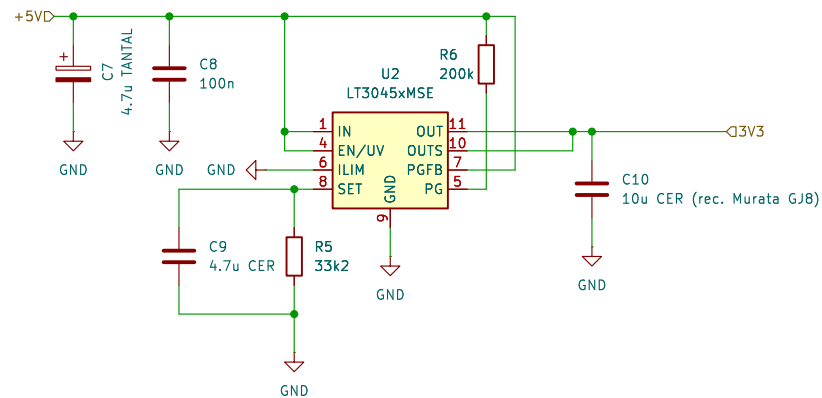

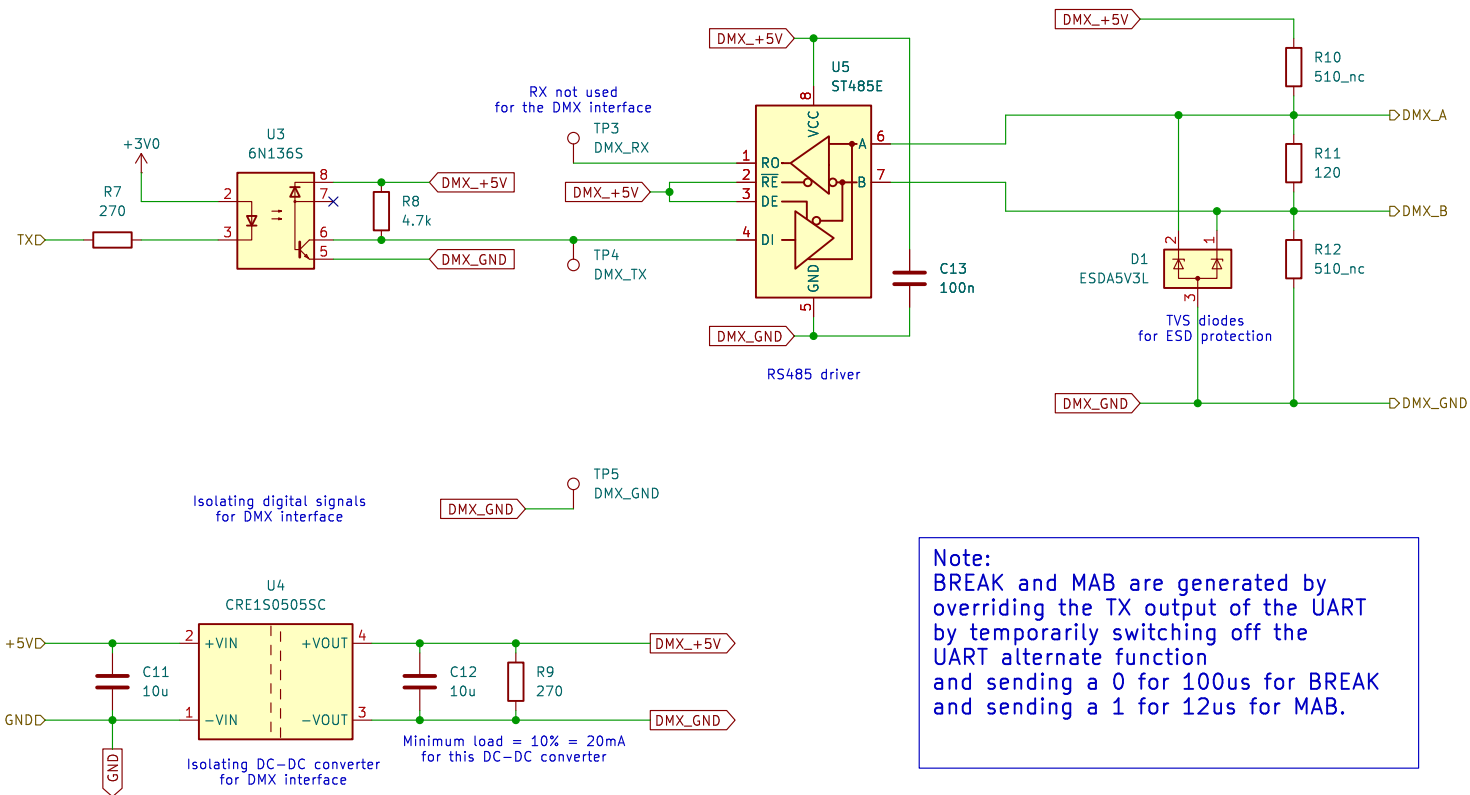

Note:
BREAK and MAB are generated by overriding the TX output of the UART by temporarily switching off the UART alternate function and sending a 0 for 100us for BREAK and sending a 1 for 12us for MAB.


hhrt@zhaw.ch

Sheet: /DMX_out/
File: DMX_out.kicad_sch

Title: DMX output to LED party panel

Size: A4 Date: 2024-11-19
KiCad E.D.A. 9.0.5

Rev: Prototyp
Id: 5/15

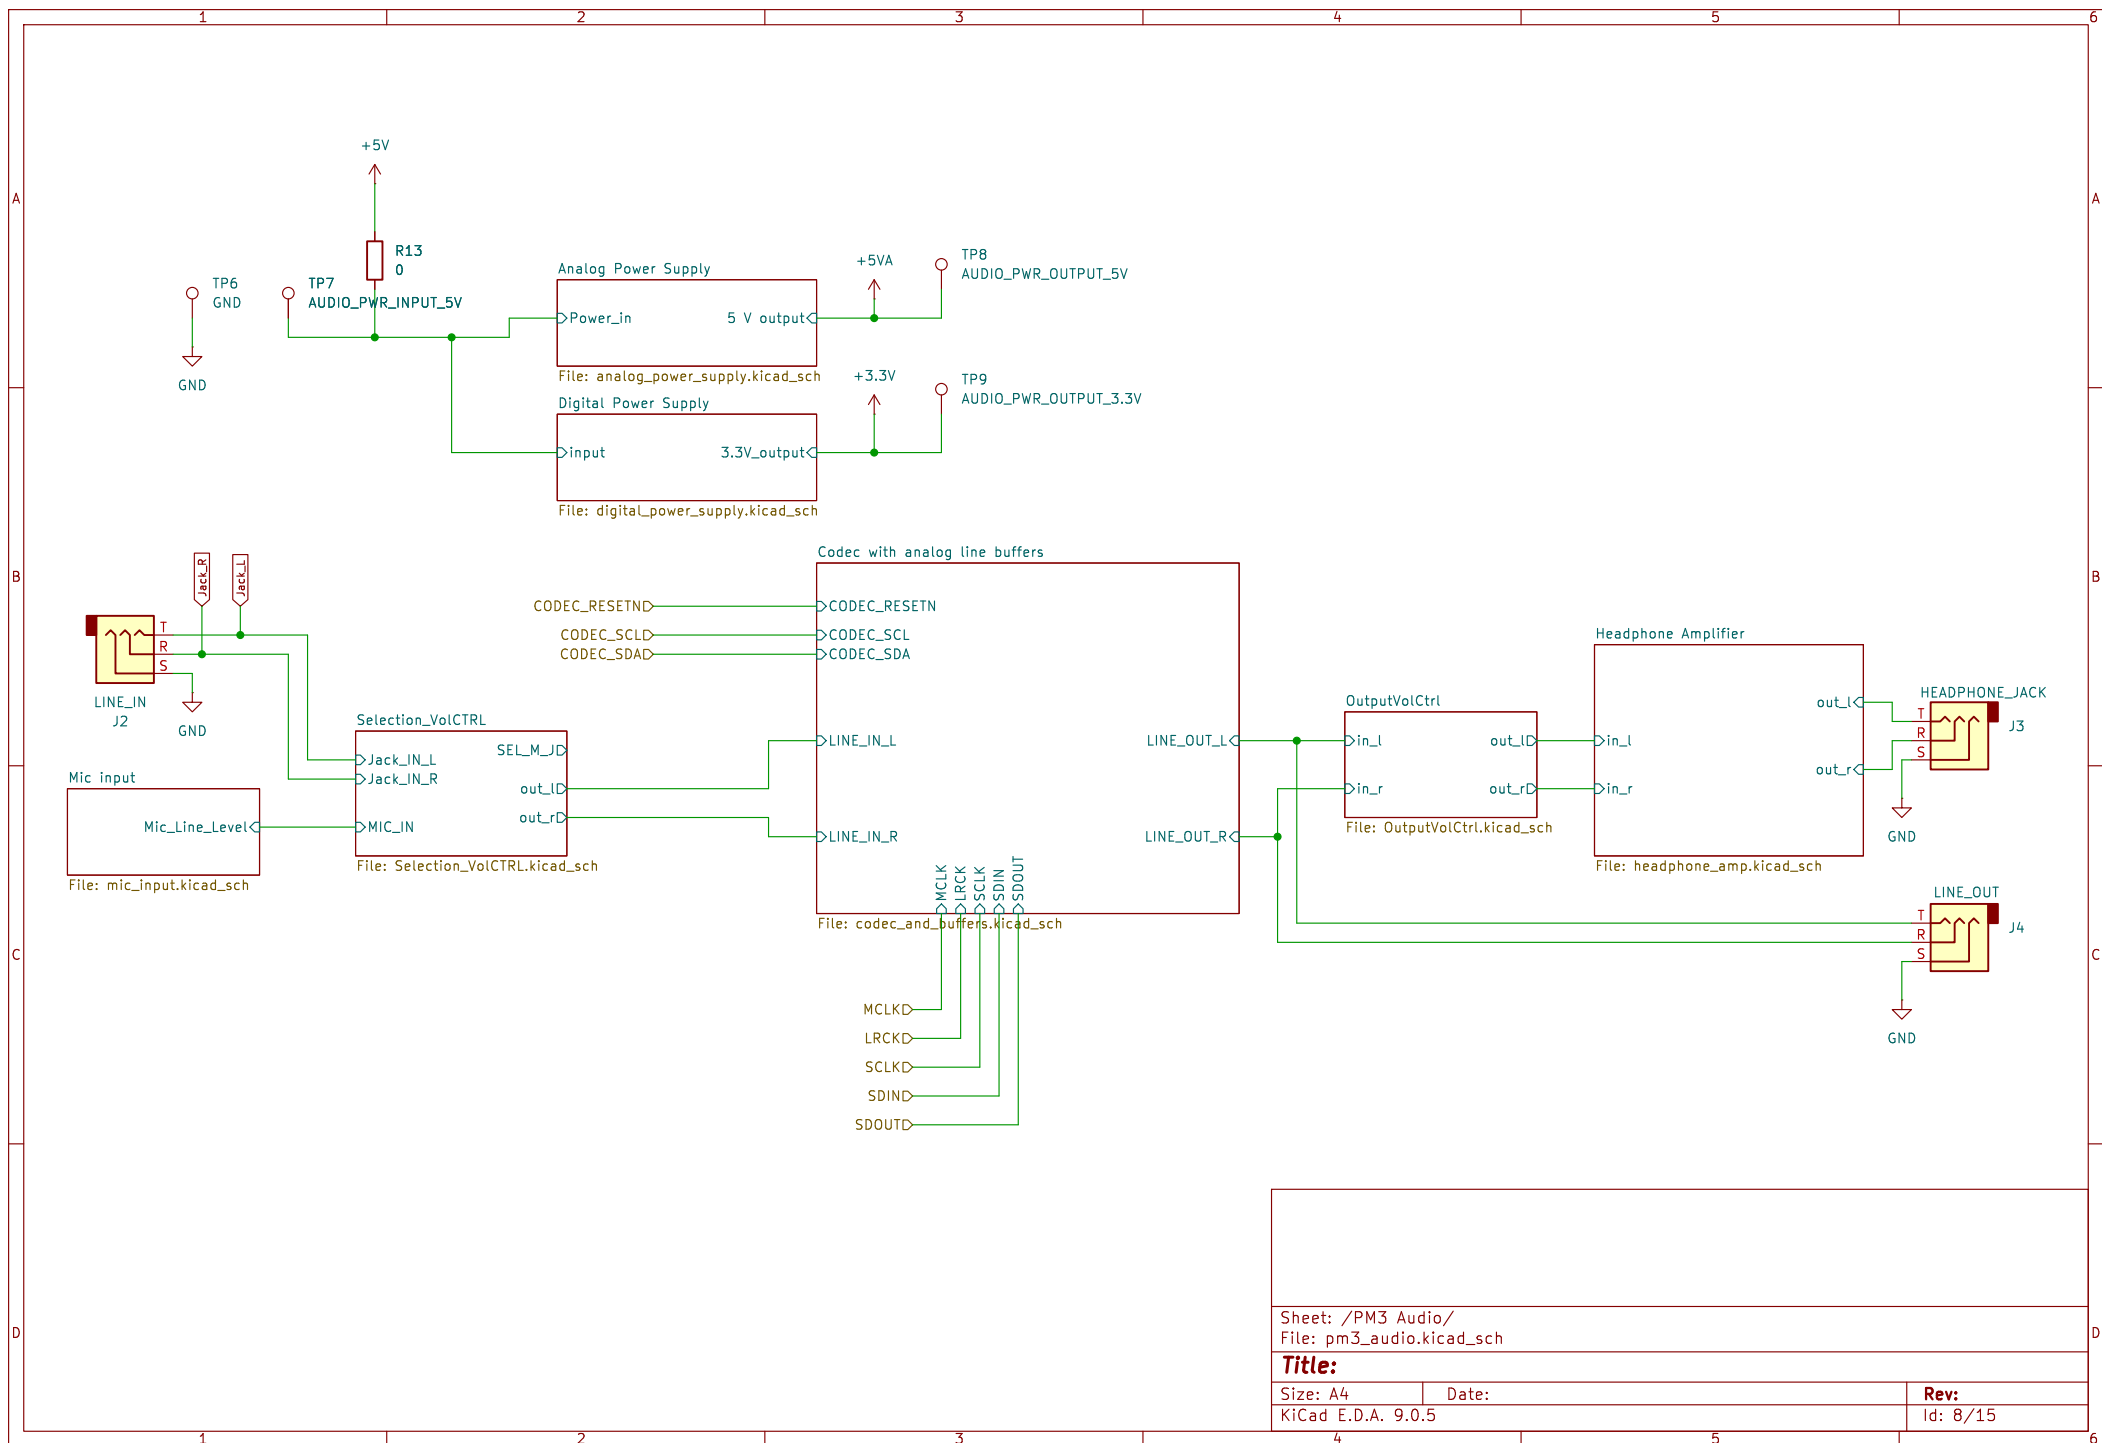

Sheet: /PM3 Audio/
File: pm3_audio.kicad_sch

Title:

Size: A4


Date:

KiCad E.D.A. 9.0.5

Rev:

Id: 8/15

switches select which audio source is chosen
Firmware knows which one is chosen by reading out the logic level
for pin SEL_M_J if its always 0V then it knows its the microphone.

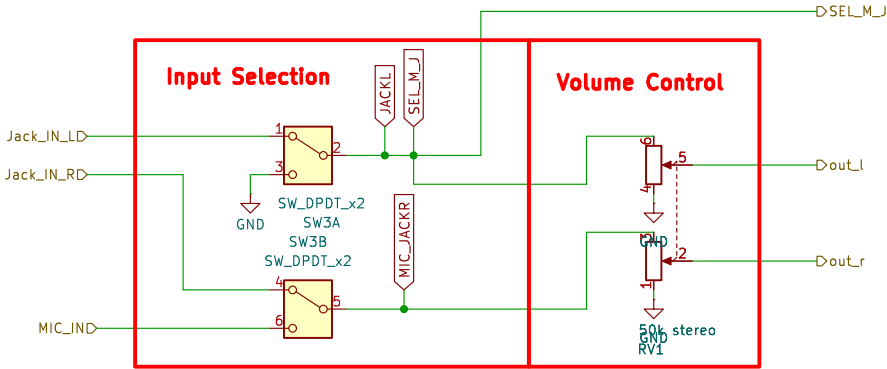

perritho • ZHAW SOE

Sheet: /PM3 Audio/Selection_VolCTRL/
File: Selection_VolCTRL.kicad_sch

Title: Selection & Volume Control


Size: A4


Date: 2025-09-22

Rev: 1

KiCad E.D.A. 9.0.5

Id: 12/15

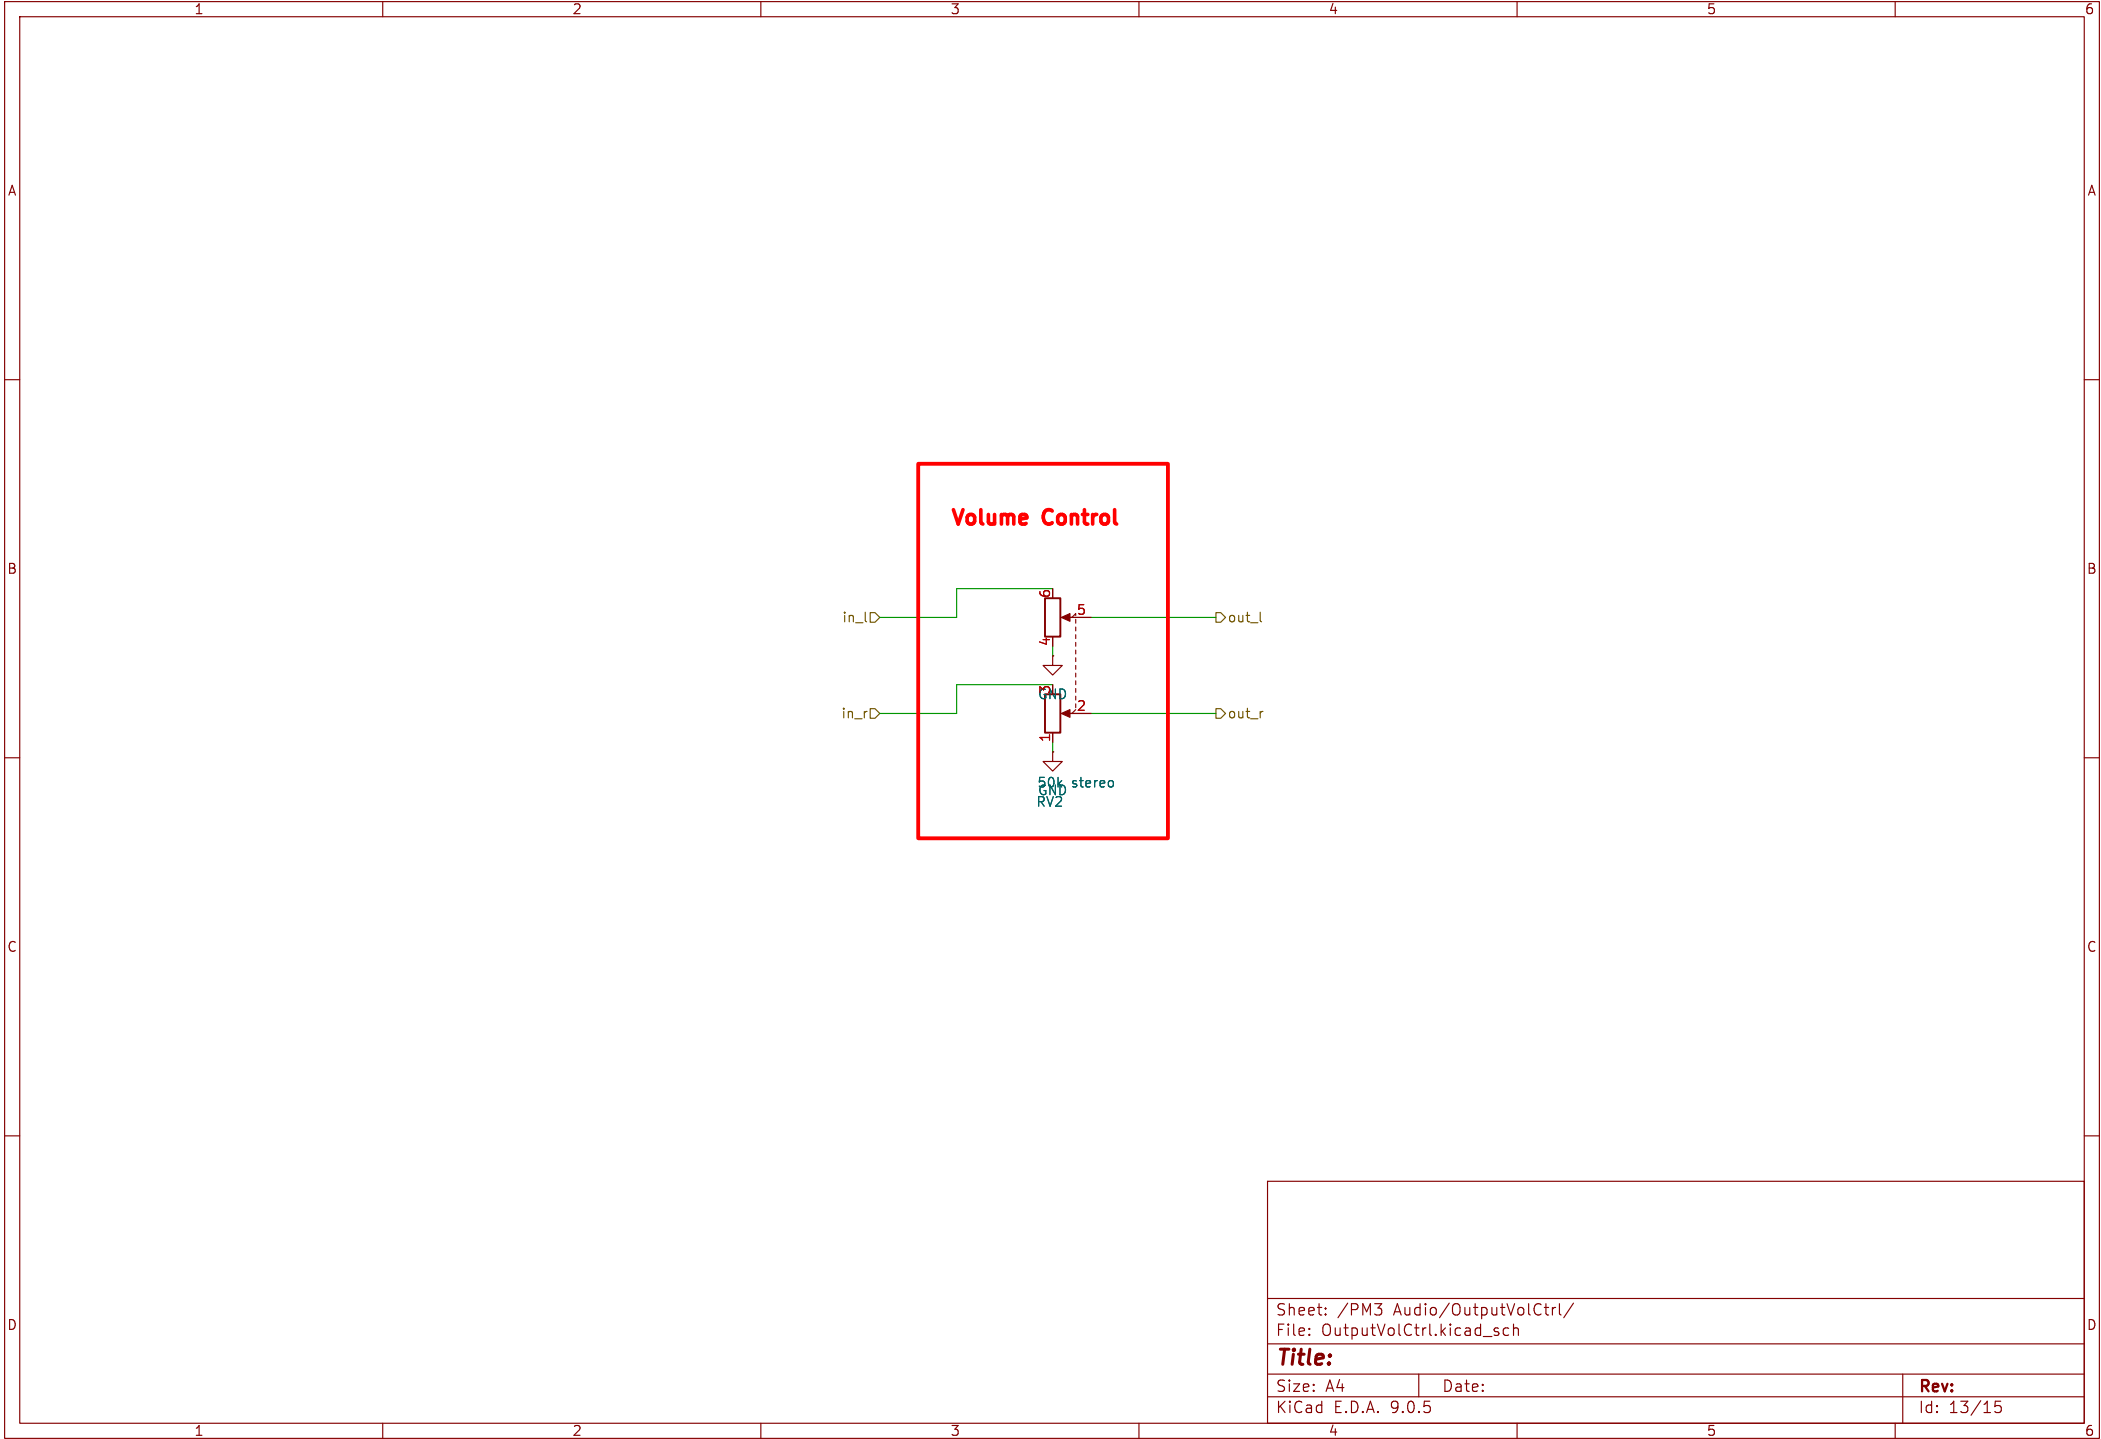

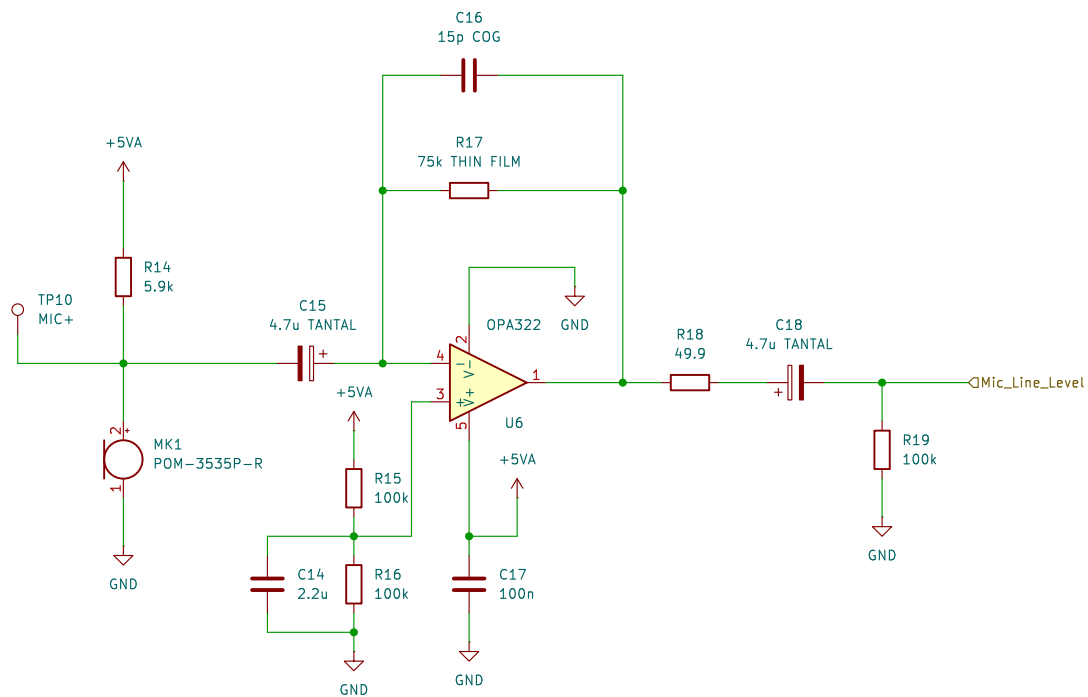

Sheet: /PM3 Audio/Mic input/
File: mic_input.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.5

Rev:

Id: 9/15

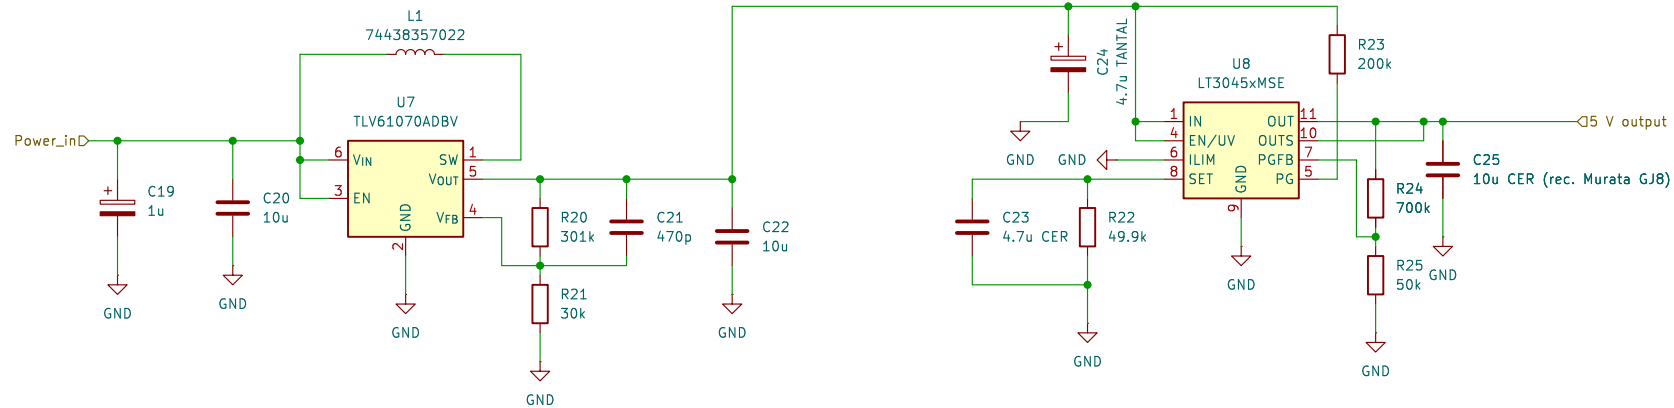

Sheet: /PM3 Audio/Analog Power Supply/
File: analog_power_supply.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.5

Rev:


Id: 10/15


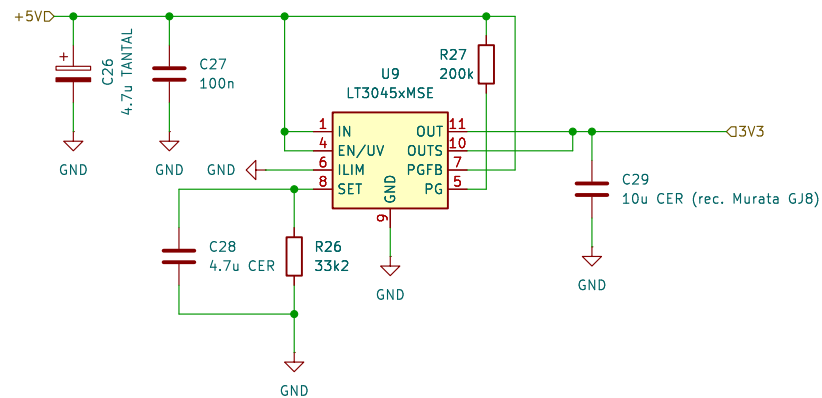


Sheet: /PM3 Audio/Digital Power Supply/
File: digital_power_supply.kicad_sch

Title:

Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.5		Id: 11/15

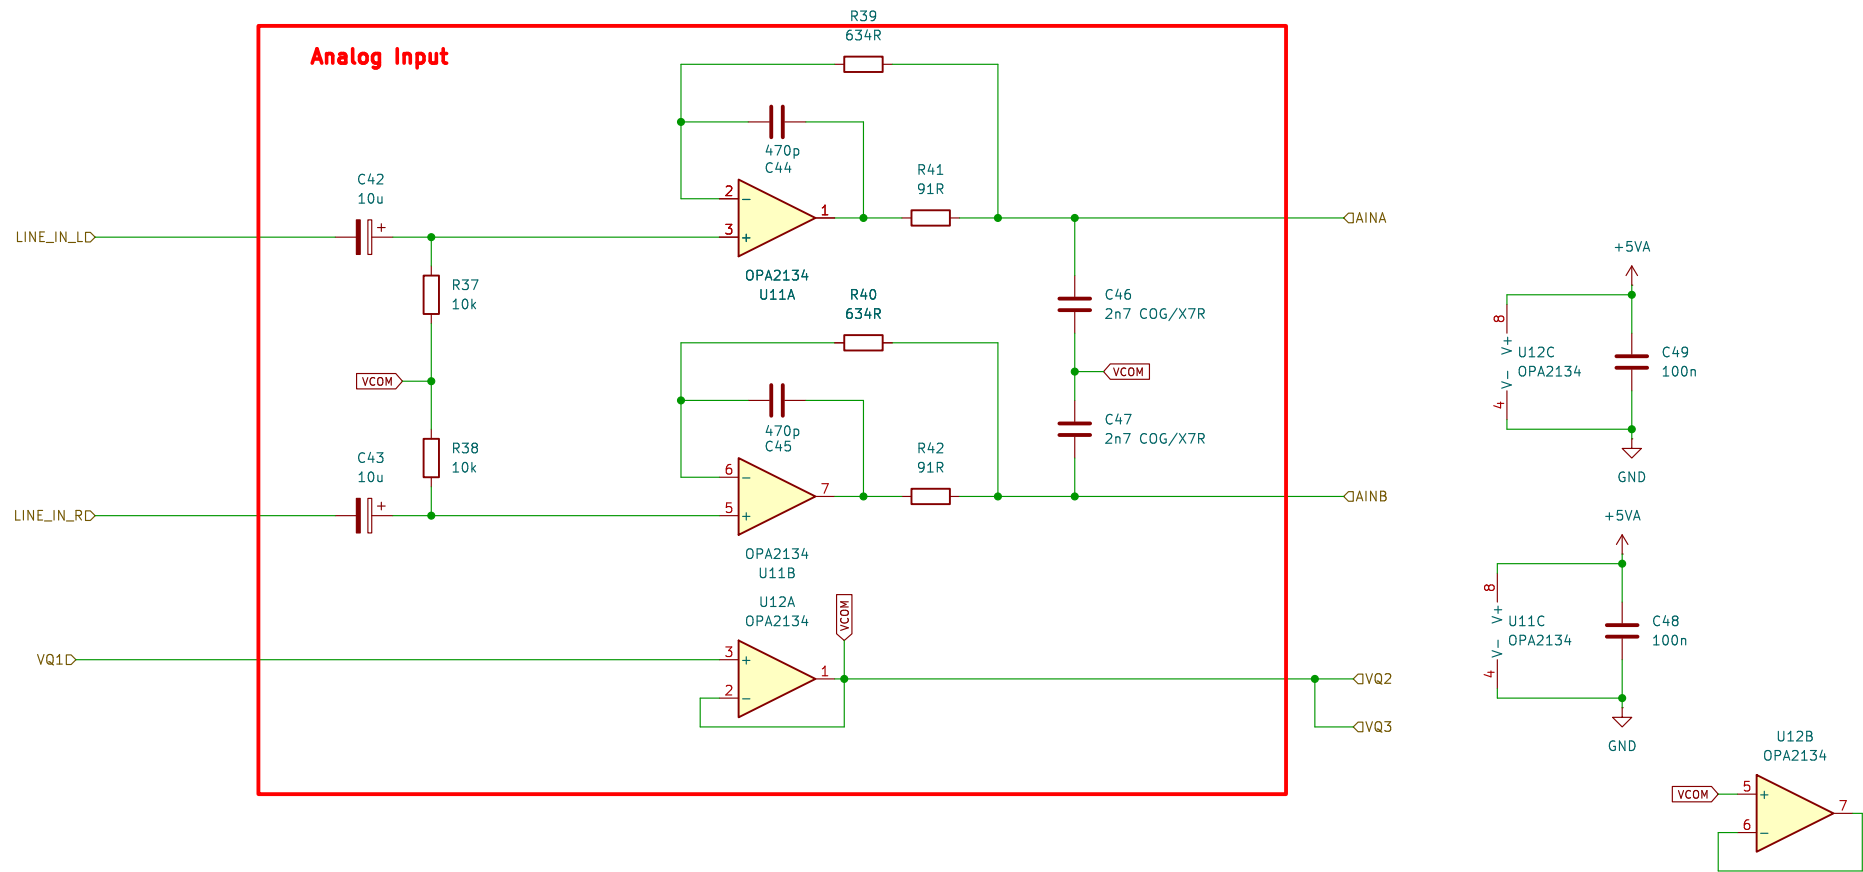

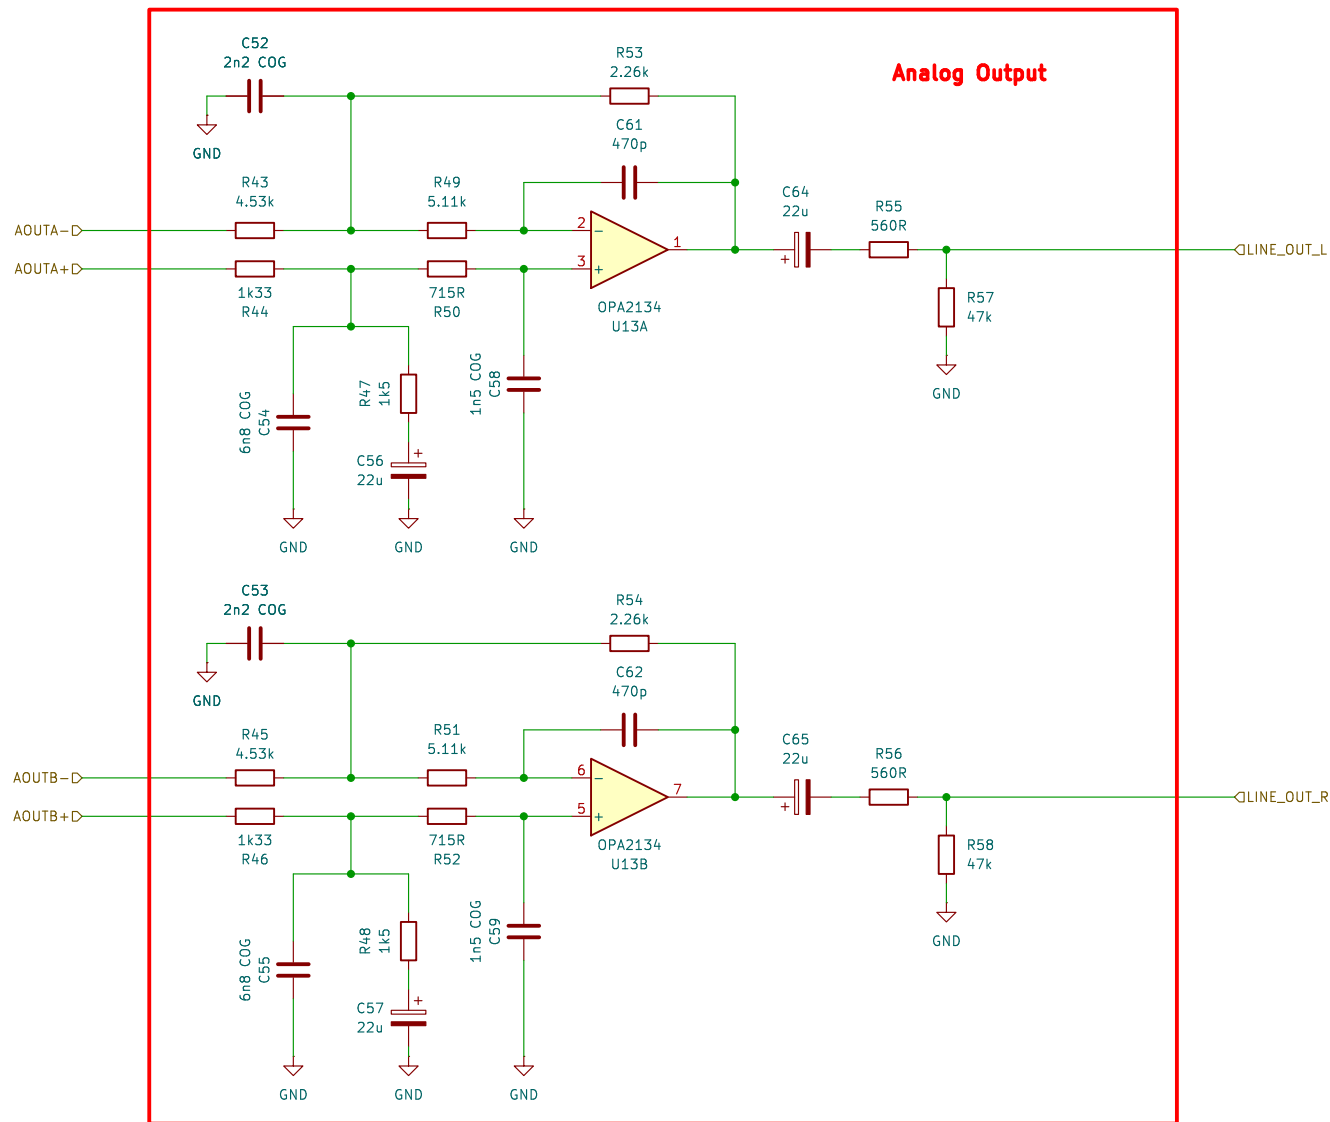

Sheet: /PM3 Audio/Codec with analog line buffers/Audio Output/
File: audio_output.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.5

Rev:

Id: 14/15

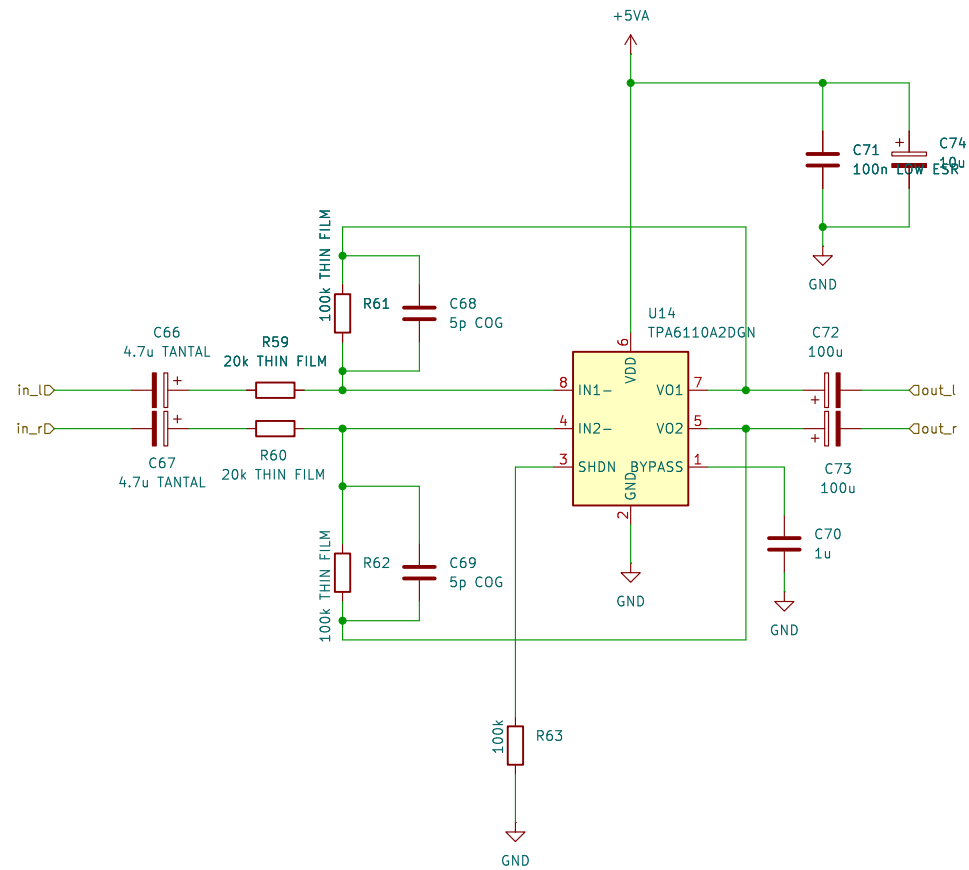

Sheet: /PM3 Audio/Headphone Amplifier/
File: headphone_amp.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.5

Rev:

Id: 15/15