




PCIe Card Edge Connector

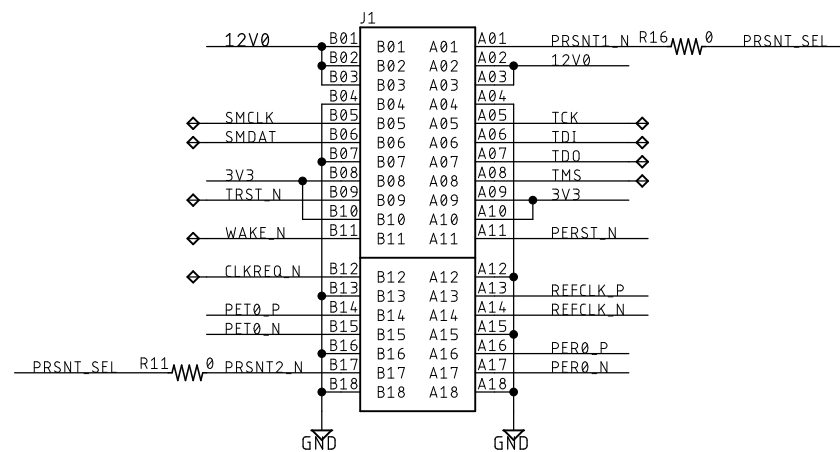

Power Supply

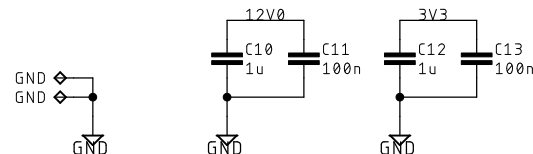


USB-C Connector

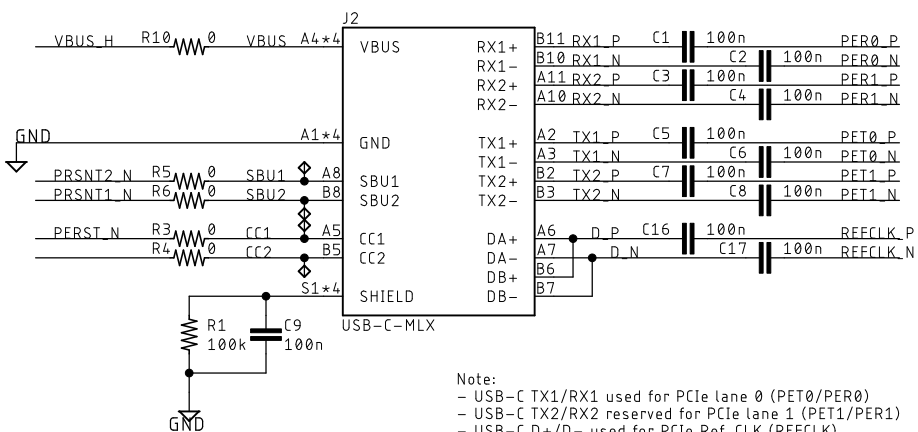

Note:
 - USB-C TX1/RX1 used for PCIe lane 0 (PET0/PER0)
 - USB-C TX2/RX2 reserved for PCIe lane 1 (PET1/PER1)
 - USB-C D+/D- used for PCIe Ref. CLK (REFCLK)
 - USB-C CC wire used for PCIe reset signal (PERST)
 - USB-C SBU1/2 used for PCIe lane sense (PRSNT)
 - USB-C cable provides RX/TX lane swapping

Status LEDs

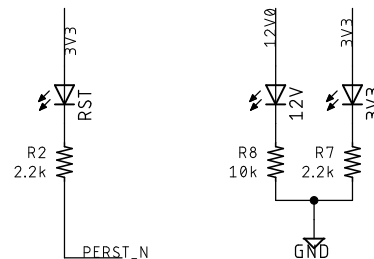

github.com/watsonboyett

EDIT 10/28/2022 22:54

REV. 1A

PAGE all the things!

DRWN

w. boyett

PROJ. pcie2usb

PS LTR

APPRVD

LIC. CC-BY-SA

PN 1/1