大型 Tomoshibi Technology

About us

We are the Japanese team of OnStage, shibi Technology". We are in the first grade of Keio University and have started developing this product since last summer when

we were high-school students. We aim to create new methods of computing sion. Also we want to show people the sight of

only a computer can see. We also hold hands-on robotics events and present at conferences to let people know about our ac These actions have led to spread a fascinating of creation and raise funds (As a result, we could rais

over \$60,000) to develop the product on a large scale. Experience Presentation Summer Presentation Event









Members



Jumpei Saito X:jun robot Founder of Tomoshibi Technology. Robot developer for 7 years.



Ryuki Tsuji X:cat nekonekone Circuit pro, started programming. Likes cats and charming circuit boards



Tomohiko lida 🕱:hato9 810 Made the Robot Arm. Likes fried rice and cabbage.

Tools

Communication











Design & Coading













Performance Concept

In our performance, we visualize a virtual world that only a computer can see with the device we developed. Ultimately, we want to create a future where computers and humans collaborate and mutually thrive as equals.

This time, a total of 12 devices (1 Moving Display, 3 RobotArm, and 8 LEDPole) will be used for the performance. Please take a look at the world of computers woven by many robots.

Design Philosophy


We are committed to creating things ourselves to accurately realize the ideas in our heads. For example, we have built all circuits such as DCDC converters and motor drivers ourselves. Knowledge can be the seed of new ideas.

Additionally, all team members have knowledge not only in their area of expertise but also in other disciplines. When problems arise, we can find solutions from multiple perspectives.

Command Center RS485 Mother Board UART 12C USB2.0 PWM

It is the command center for controlling each device. At the same time, it also displays images through a projector.

Moving Display

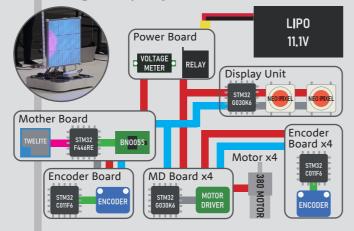

A display that can equally represent both the virtual and real worlds. It is a display that lets you glimpse into the virtual world.



Omnidirectional Wheel Equipped with suspension



Color Recgnition The camera checks the color of the ball.




Self-position estimate

for stable operation.

It measures its position using an encoder wheel.

Robot Arm

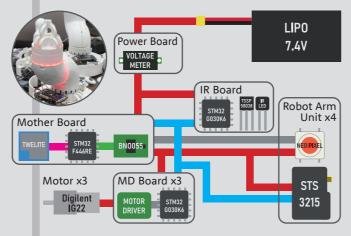

Combining movement and light, it creates expressions beyond imagination. This is a new form of dance.



Free rotation by Gears

The frame and gears were optimized using 3D printed parts.



Full Color LED


LEDs integrated into the joints, creating a beautiful expression.



Hand Mechanism

Utilized a rack-and-pinion mechanism and bevel gears.

LED Pole

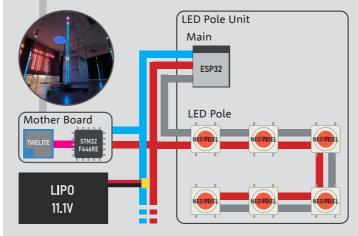

Multiple full-color LEDs work together to display a large image. And it can also analyze ambient sounds in real-time and display them.

desired space.



Control via wireless Freely adjustable to fit the

Full Color LED Each pole has 360 LEDs to visualize sound, etc.



Microphone Measurements Measure and visualize environmental sounds

Effective Team Communication


Effective team communication is essential to building a great robot. For this purpose, we mainly used Cosense, a document sharing tool; GitHub, a source code version control and sharing tool; and Discord, a contact tool.

Especially with Cosense, each member collects newly learned techniques and know-how. There are over 500 pages of articles, including tips on using a CNC milling machine and commands for controlling a microcontroller with the STM32HAL. Accruing knowledge makes it easier for other members to understand the same technology when they want to know about it. With Cosense, individual knowledge becomes team knowledge.



Features

Introducing the Amazing Features of Our Robot



1, Fixing image to Place

Flawless self-position estimate and correct mechanism make new


Moving Display provides a stimulative experience for audience with the omnidirectional cart and full color LED matrix display with 48x48 resolution. It performs expression such as that the image is fixed to the place by synchronizing movement of robots with a change of the image.

For this expression, accurate position and speed control are absolutely essential. We made many prototypes like gyro sensor estimation. Therefore, the robot has been created with localization by spring-loaded encoder wheel, stable speed control on each driving wheel, and a suspension mechanism to avoid ground

2. Real-Time Visualization

Display a large image using multiple LED Poles and Visualizing

It is important that multiple devices work together. LEDPole has a high-speed communication line, a 5V10A DCDC converter of our own design that can make over 300 LEDs glow very brightly, and a microphone to analyze ambient sounds. Making the DCDC converter was challenging but essential for powering many LEDs. By designing several prototypes, we discovered that the big difference is caused by design of pattern even if they are on the same circuit. We made PFM driving and nonsynchronous rectifying buck converter because it is easier to design with low noise. We plan to develop synchronous type which is highly efficient and low noise at low load.



3, Lighting Illusion

The free rotation of motor with full-color LEDs create an illusion.

RobotArm utilizes serial servo motors and full-color LEDs to provide viewers with a unique experience. Through the rotation of the motors and changes in the LED lights, it creates effects where points of light appear fixed or rotate at high speeds. For these effects, free rotation of the motors was essential. To prevent cutting the signal lines for the serial servos and full-color LEDs, we developed a gear structure after several prototypes.

Additionally, since serial servo motors lack a mode for free rotation with angle control, we implemented a program that allows for speed control and position acquisition simultaneously, thus enabling free rotation with angle control.

4, Perfect Synchronization

ALL of our robots synchronize their colors and movements using RS485 and ZigBee.

Linking devices is very important to create new experiences. The 12 devices we developed have a total of over 50 microcontrollers. To communicate with these computers, we developed a unique master-slave protocol that passes over RS485 within each robot. Between each robot, we developed wireless communication using ZigBee.

Moreover, for over 50 microcontrollers, we selected pins and clock speeds optimized for the locations where they would be used. We also designed all the boards ourselves and unified the protocols so that all devices could work together in real time.



























Instagram