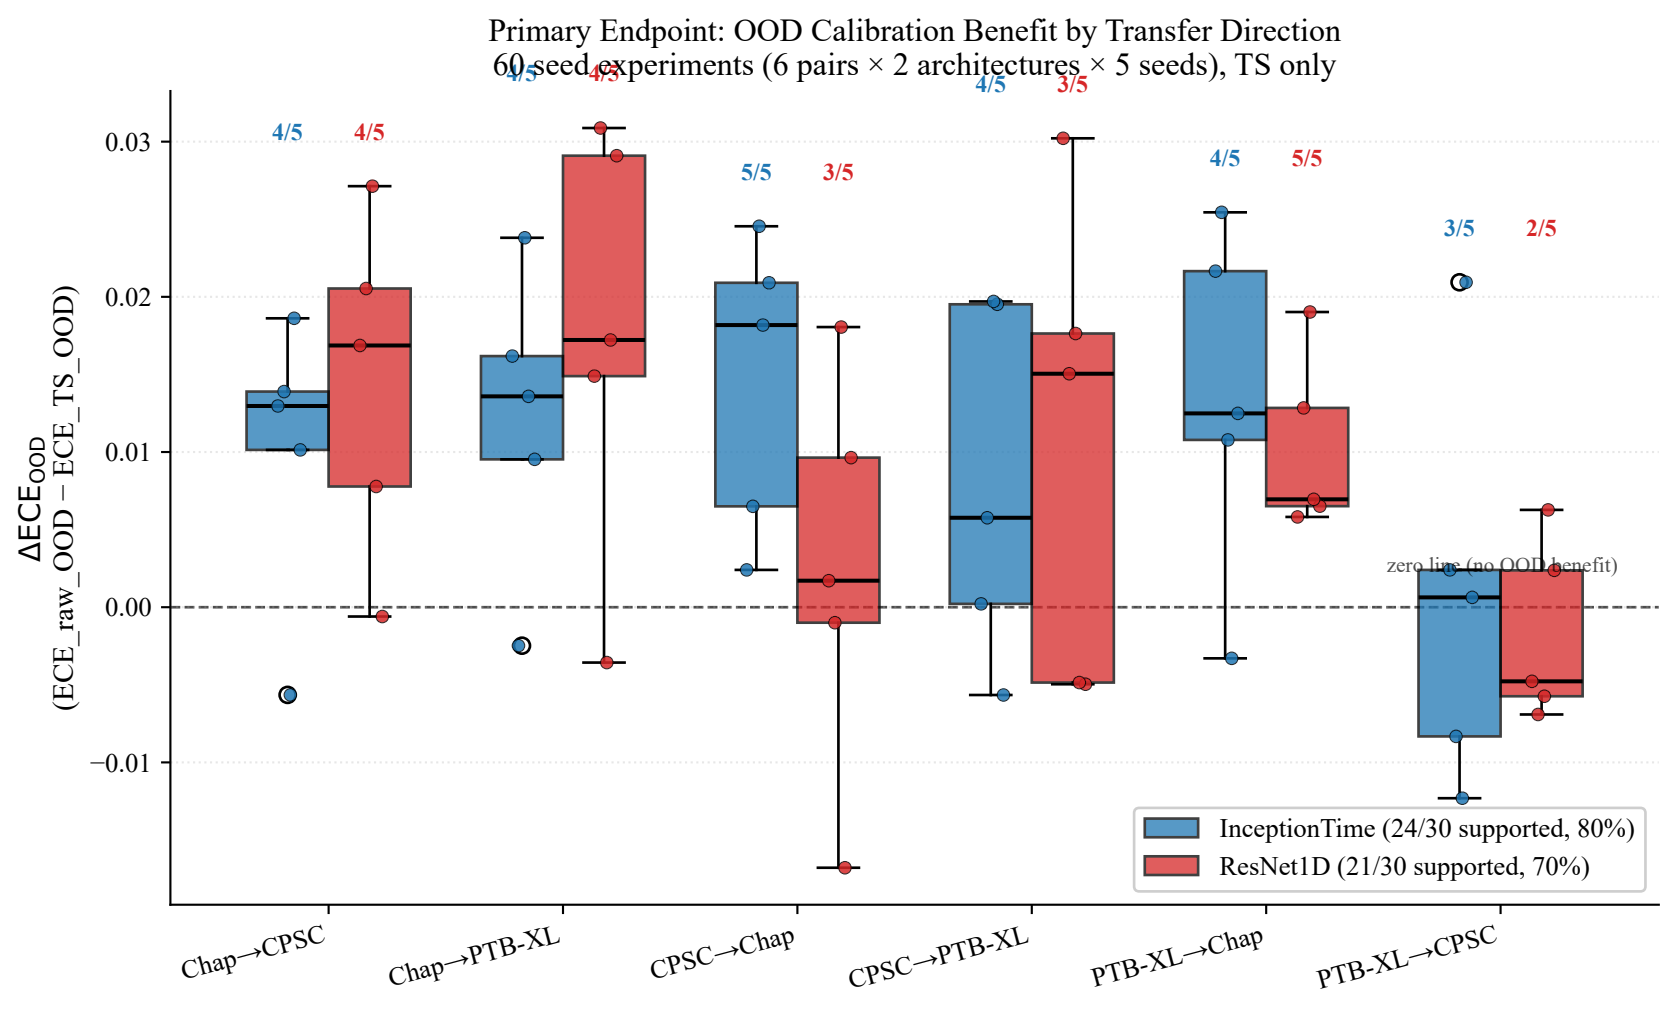

Primary Endpoint: OOD Calibration Benefit by Transfer Direction
60 seed experiments (6 pairs × 2 architectures × 5 seeds), TS only
ΔECE_OOD
(ECE_raw_OOD − ECE_TS_OOD)
0.03
0.02
0.01
0.00
−0.01
4/5
4/5
4/5
4/5
5/5
3/5
4/5
3/5
4/5
5/5
3/5
2/5
zero live (no OOD benefit)
InceptionTime (24/30 supported, 80%)
ResNet1D (21/30 supported, 70%)
Chap→CPSC
Chap→PTB-XL
CPSC→Chap
CPSC→PTB-XL
PTB-XL→Chap
PTB-XL→CPSC