



AMERICAN INTERNATIONAL UNIVERSITY-BANGLADESH (AIUB)

Where leaders are created

Lecture # 2 (Final)

Pulse Width Modulation (PWM)


Prepared by: Ms. Tahseen Asma Meem, Lecturer, EEE Department, AIUB

Modified by the Course Teacher: Prof. Dr. Engr. Muhibul Haque Bhuyan

EEE Department, AIUB

PWM

Pulse Width Modulation, or PWM, is a technique for getting analog results with digital means. Digital control is used to create a square wave, a signal switched between on and off. This on-off pattern can simulate voltages in between the full V_{CC} of the board (e.g., 5 V on UNO) and off (0 Volts). The duration of "on time" is called the **pulse width**. To get varying analog values, the pulse width can be varied. If this on-off pattern is repeated fast enough with an LED, for example, the result is as if the signal is a steady voltage between 0 and V_{CC} controlling the brightness of the LED.

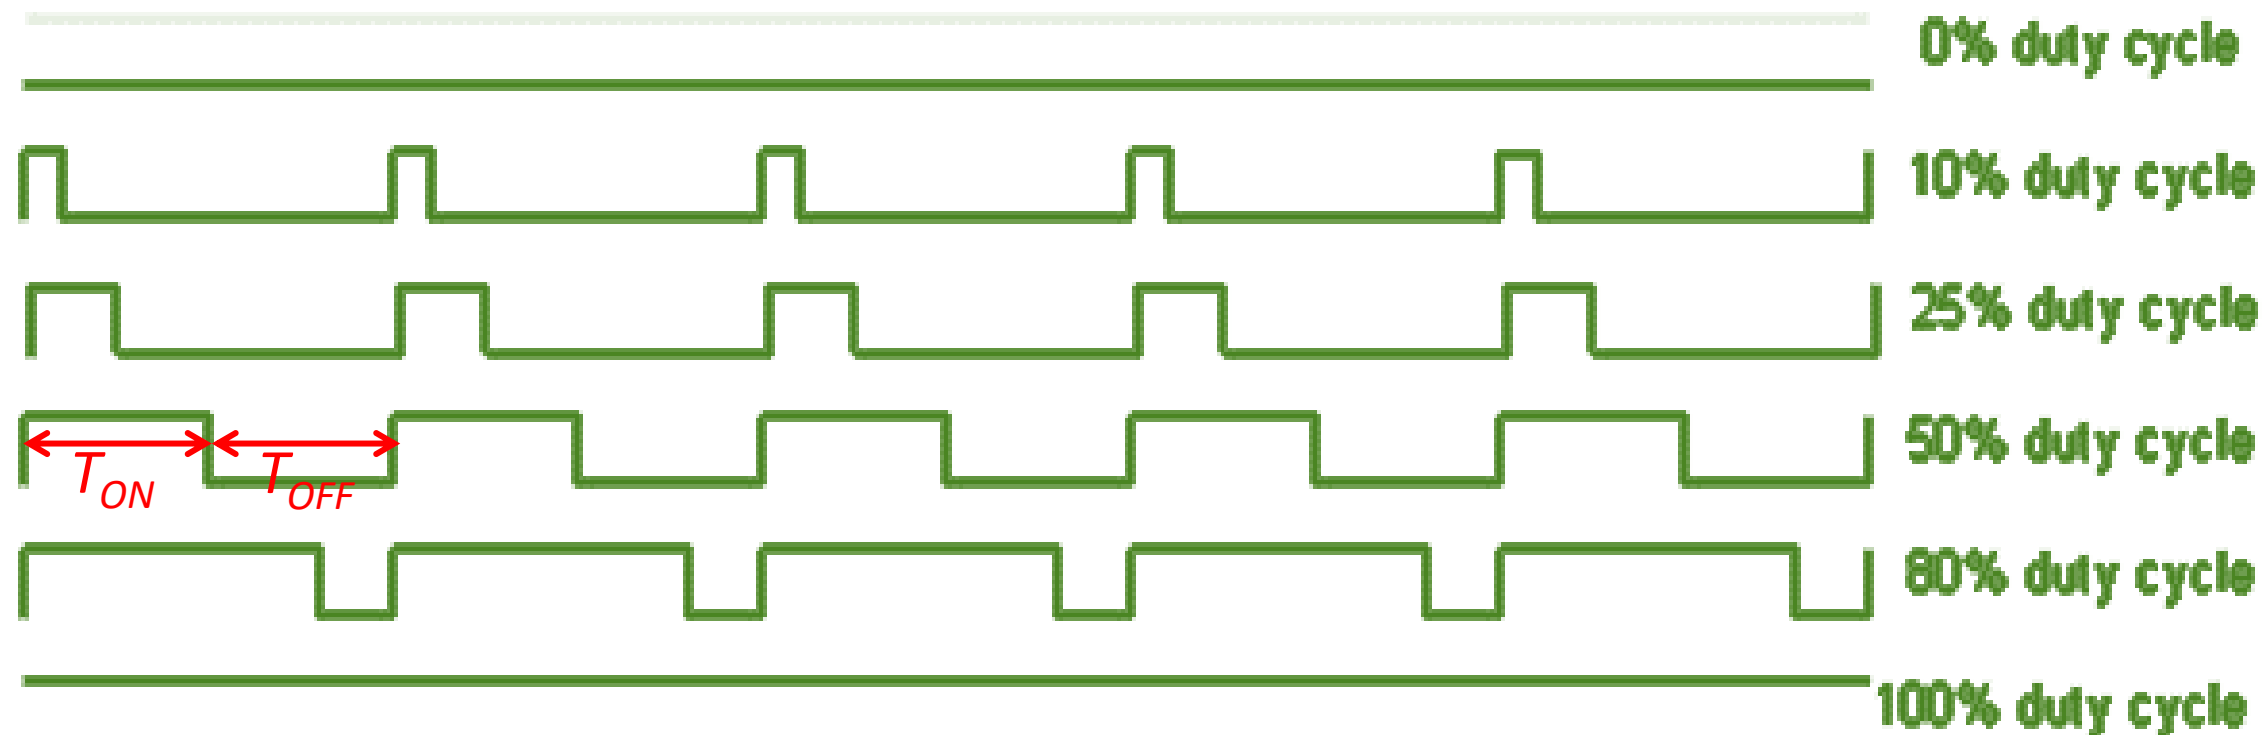

The duty cycle is defined as the ratio of ON pulse duration to the time period.

$$D = \frac{T_{ON}}{T} \times 100\%$$

Here, T_{ON} = ON pulse duration
 T = Time period = $T_{ON} + T_{OFF}$
 ,where T_{OFF} = OFF pulse duration


PWM

The Arduino's programming language makes PWM easy to use; simply call the built-in function **analogWrite(pin, dutyCycle)**, where **dutyCycle** is a value **from 0 to 255**, and **pin** is one of the **PWM pins (3, 5, 6, 9, 10, or 11)**.

The **analogWrite()** function provides a simple interface to the hardware PWM but doesn't provide any control over frequency.

Note the tilde ~ sign with the pin numbers of the image.

The mappings of the PWM pins with the timers are **3:OC2B, 5:OC0B, 6:OC0A, 9:OC1A, 10:OC1B, and 11:OC2A**).

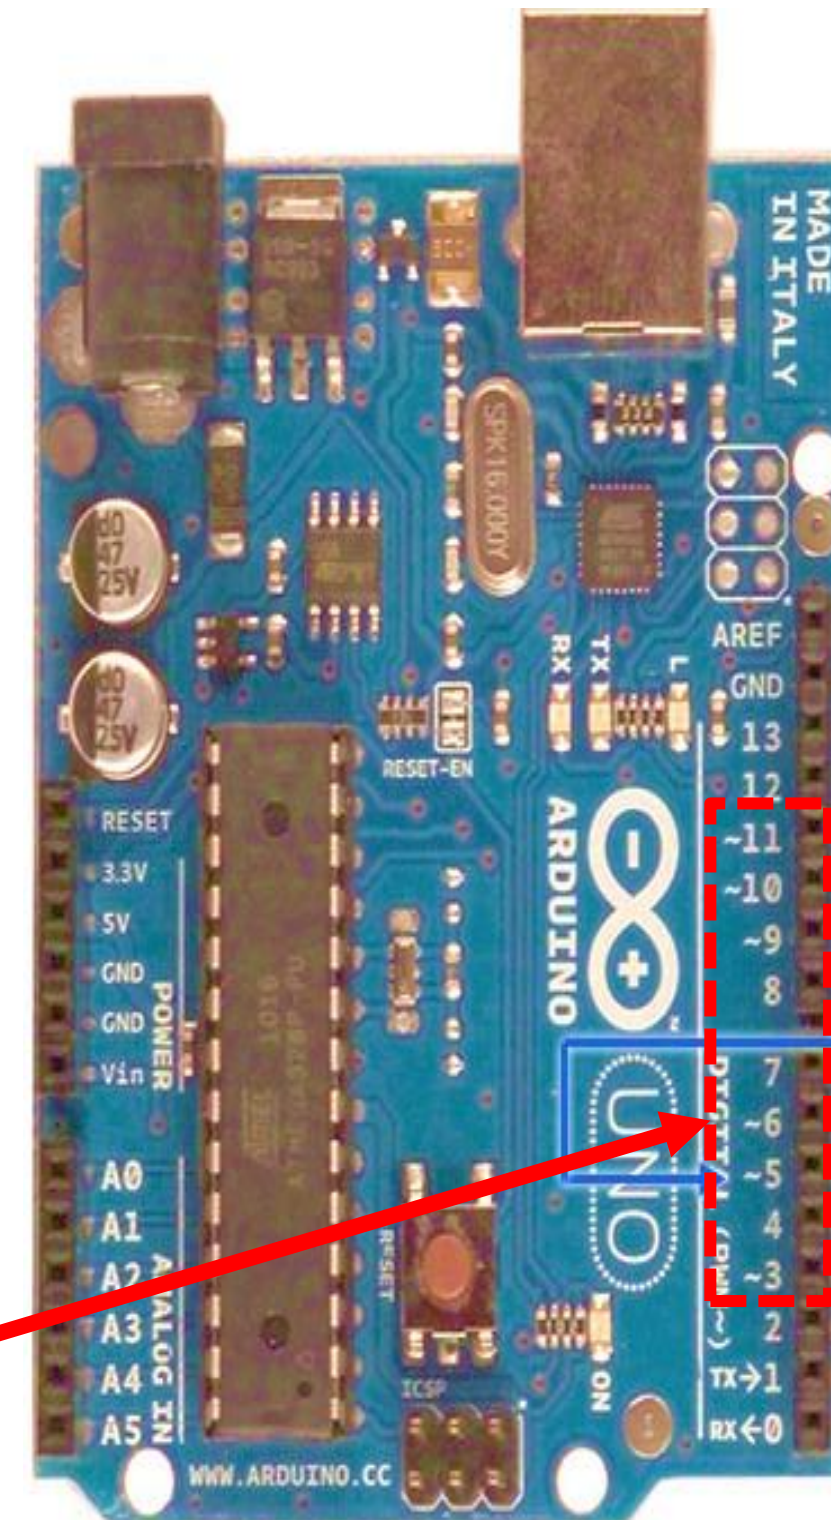

Timer/Counter
Input/Output
Pins

- 11 Timer 2 "A" output (OC2A)
- 10 Timer 1 "B" output (OC1B)
- 9 Timer 1 "A" output (OC1A)
- 5 Timer 1 input (T1)
- 6 Timer 0 "A" output (OC0A)
- 5 Timer 0 "B" output (OC0B)
- 4 Timer 0 input (T0)
- 3 Timer 2 "B" output (OC2B)

PWM

The **main PWM modes** are "Fast PWM" and "Phase-correct PWM".

There are **two Fast PWM modes** for Timer/Counter 0 unit. These are **modes 3 and 7**, which are selected using the waveform generation mode bits (WGM02, WGM01, and WGM00). The WGM01 and WGM00 bits are located in the TCCR0A register. The WGM02 bit is located in the TCCR0B register.

There are **2 types** of Fast PWM modes: (a) Non-inverting and (b) Inverting Fast PWM


Bit	7	6	5	4	3	2	1	0	
0x25 (0x45)	FOC0A	FOC0B	-	-	WGM02	CS02	CS01	CS00	TCCR0B
Read/Write	W	W	R	R	R/W	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	
Bit	7	6	5	4	3	2	1	0	
0x28 (0x48)	OCR0B[7:0]								OCR0B
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	
Bit	7	6	5	4	3	2	1	0	
0x15 (0x35)	-	-	-	-	-	OCF0B	OCF0A	TOV0	TIFR0
Read/Write	R	R	R	R	R	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

CS02	CS01	CS00	Description
0	0	0	No clock source (Timer/Counter stopped)
0	0	1	clk _{I/O} /(No prescaling)
0	1	0	clk _{I/O} /8 (From prescaler)
0	1	1	clk _{I/O} /64 (From prescaler)
1	0	0	clk _{I/O} /256 (From prescaler)
1	0	1	clk _{I/O} /1024 (From prescaler)
1	1	0	External clock source on T0 pin. Clock on falling edge.
1	1	1	External clock source on T0 pin. Clock on rising edge.

The difference between the mode 3 and mode 7 Fast PWMs is their TOP values. For mode 3, the TOP value is fixed (0xFF), whereas that for mode 7 is OCRnA value. So, if mode 7 is used then we must **load a count value** into the **OCRnA register**. Once a mode is selected, the timer/counter starts counting from BOTTOM to TOP value and when the TOP value is reached the counting is repeated from BOTTOM.

Mode	WGM02	WGM01	WGM00	Timer/Counter Mode of Operation	TOP	Update of OCRx at	TOV Flag Set on ⁽¹⁾⁽²⁾
0	0	0	0	Normal	0xFF	Immediate	MAX
1	0	0	1	PWM, Phase Correct	0xFF	TOP	BOTTOM
2	0	1	0	CTC	OCRA	Immediate	MAX
3	0	1	1	Fast PWM	0xFF	BOTTOM	MAX
4	1	0	0	Reserved	—	—	—
5	1	0	1	PWM, Phase Correct	OCRA	TOP	BOTTOM
6	1	1	0	Reserved	—	—	—
7	1	1	1	Fast PWM	OCRA	BOTTOM	TOP

The table in the right shows the **WGM bits combination** for mode 3 and mode 7.

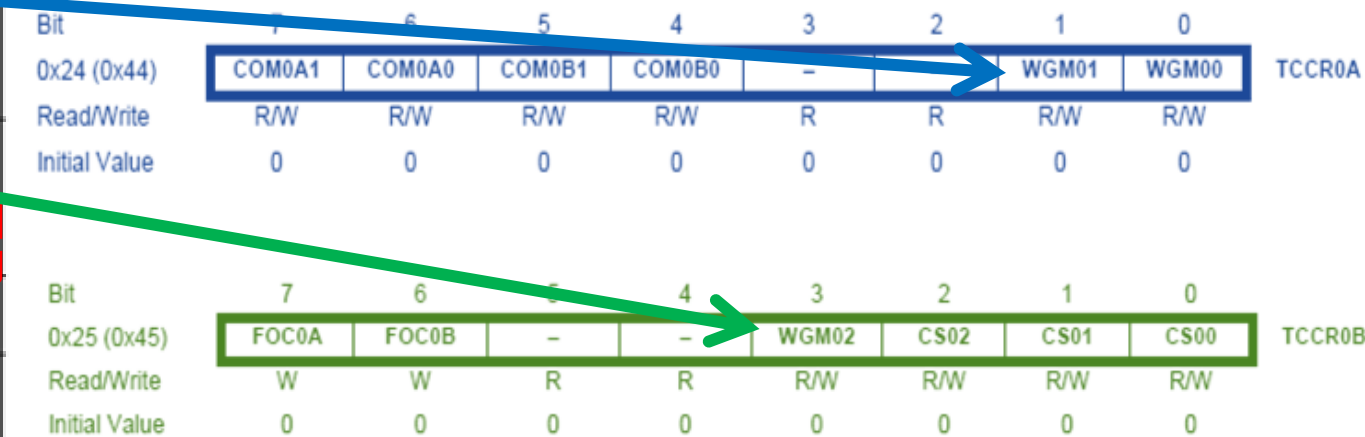

Fast PWM Mode: Setting Modes

In the fast PWM mode, the Compare Output Mode bits COM0A1, COM0A0 (in the TCCR0A register) for the output at OC0A and bits COM0B1, COM0B0 (in the TCCR0B register) for the output at OC0B, are used to configure the output as either non-inverting or inverting mode of operation. Table 12-3 shows how to select COM0A1, COM0A0 bits to generate non-inverting and inverting mode's fast PWM waveform.

Table 12-3. Compare Output Mode, Fast PWM Mode⁽¹⁾

COM0A1	COM0A0	Description
0	0	Normal port operation, OC0A disconnected.
0	1	WGM02 = 0: Normal Port Operation, OC0A Disconnected. WGM02 = 1: Toggle OC0A on Compare Match.
1	0	<u>Clear OC0A on Compare Match, set OC0A at BOTTOM, (non-inverting mode).</u>
1	1	<u>Set OC0A on Compare Match, clear OC0A at BOTTOM, (inverting mode).</u>

Fast PWM Mode: Setting Modes

In the fast PWM mode, the compare unit allows the generation of PWM waveforms on the OC0x pins. [Table 12.6](#) shows the COM0B1:0 bits' functionality when the WGM02:0 bits are set to the fast PWM mode.

Table 12-6. Compare Output Mode, Fast PWM Mode⁽¹⁾

COM0B1	COM0B0	Description
0	0	Normal port operation, OC0B disconnected.
0	1	Reserved
1	0	<u>Clear OC0B on Compare Match, set OC0B at BOTTOM, (non-inverting mode)</u>
1	1	<u>Set OC0B on Compare Match, clear OC0B at BOTTOM, (inverting mode).</u>

Note: 1. A special case occurs when OCR0B equals TOP and COM0B1 is set. In this case, the Compare Match is ignored, but the set or clear is done at TOP. See ["Fast PWM Mode" on page 101](#) for more details.

Fast PWM Mode: Setting Modes

Setting the **COM0x1:0** bits to **10** will produce a **non-inverted PWM** and an **inverted PWM** output can be generated by setting the **COM0x1:0** to **11**.

Setting the COM0A1:0 bits to **01** allows the OC0A pin to **toggle** on Compare Matches if the **WGM02 bit is set**. This option is not available for the OC0B pin (see [Table 12-6](#)).

Bit	7	6	5	4	3	2	1	0	
0x24 (0x44)	COM0A1	COM0A0	COM0B1	COM0B0	–	–	WGM01	WGM00	TCCR0A
Read/Write	R/W	R/W	R/W	R/W	R	R	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	
Bit	7	6	5	4	3	2	1	0	
0x25 (0x45)	FOC0A	FOC0B	–	–	WGM02	CS02	CS01	CS00	TCCR0B
Read/Write	W	W	R	R	R/W	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

-
- The diagram illustrates the internal architecture of the AVR Timer/Counter Unit (TCU). It shows the following components and their interconnections:
- Control Logic:** Receives **Count**, **Clear**, and **Direction** signals. It outputs **TOP** and **BOTTOM** signals to the **Timer/Counter** and **Waveform Generation** blocks. It also outputs **TOVn (Int. Req.)** and **clk_{Tn}**.
 - Timer/Counter (TCNTn):** A red dashed box containing the **TCNTn** register. It receives **TOP** and **BOTTOM** signals and outputs **clk_{Tn}** to the **Waveform Generation** blocks.
 - Waveform Generation:** Two blocks, **Waveform Generation** (red dashed box) and **Waveform Generation** (blue dashed box), which output **OCnA (Int. Req.)** and **OCnB (Int. Req.)** respectively. They receive **clk_{Tn}** and **TOP** signals.
 - OCnA and OCnB:** Output pins for the timer, each with its own **OCnA** and **OCnB** registers (red and blue dashed boxes).
 - Fixed TOP Value:** A block that provides a fixed **TOP** value to the **Waveform Generation** blocks.
 - DATA BUS:** A vertical bus on the left that connects to the **TCNTn**, **OCRnA**, **OCRnB**, **TCCRnA**, and **TCCRnB** registers.
 - TCCRnA and TCCRnB:** Timer Counter Control Registers that interface with the **DATA BUS** and control the timer's operation.

Fast PWM Mode

- Due to the single-slope operation, the operating frequency of the **Fast PWM mode** can be **twice as high as** the phase correct PWM mode that uses dual-slope operation.
- This high frequency makes the fast PWM mode well suited for **power regulation, rectification, and DAC applications**.
- High frequency allows physically small-sized external components (coils, capacitors), and therefore **reduces** the total system cost.
- In fast PWM mode, the counter is incremented until the counter value **matches the TOP** value, the register TCNTn counts from bottom value to maximum value stored in the register OCRn. The counter is then cleared/reset to zero at the following timer clock cycle. If the timer is configured in non-inverting mode, **PWM output pin (OCn)** goes low when the value of the above two registers matches. The OCn pin becomes high when the **TCNTn register reaches at bottom value**. In inverting mode, **OCn pin behaves opposite to non-inverting mode**.

Fast PWM Mode

- The timing diagram for the **Fast PWM Mode** is shown in Figure 12.6.
- The TCNT0 value is in the timing diagram shown as a histogram for illustrating the **single-slope operation**.
- The diagram includes both **non-inverted and inverted PWM outputs**.

The small horizontal line marks on the TCNT0 slopes represent **compare matches** between OCR0x and TCNT0.

- The **Timer/Counter Overflow Flag (TOV0)** is set each time the counter reaches **BOTTOM**.

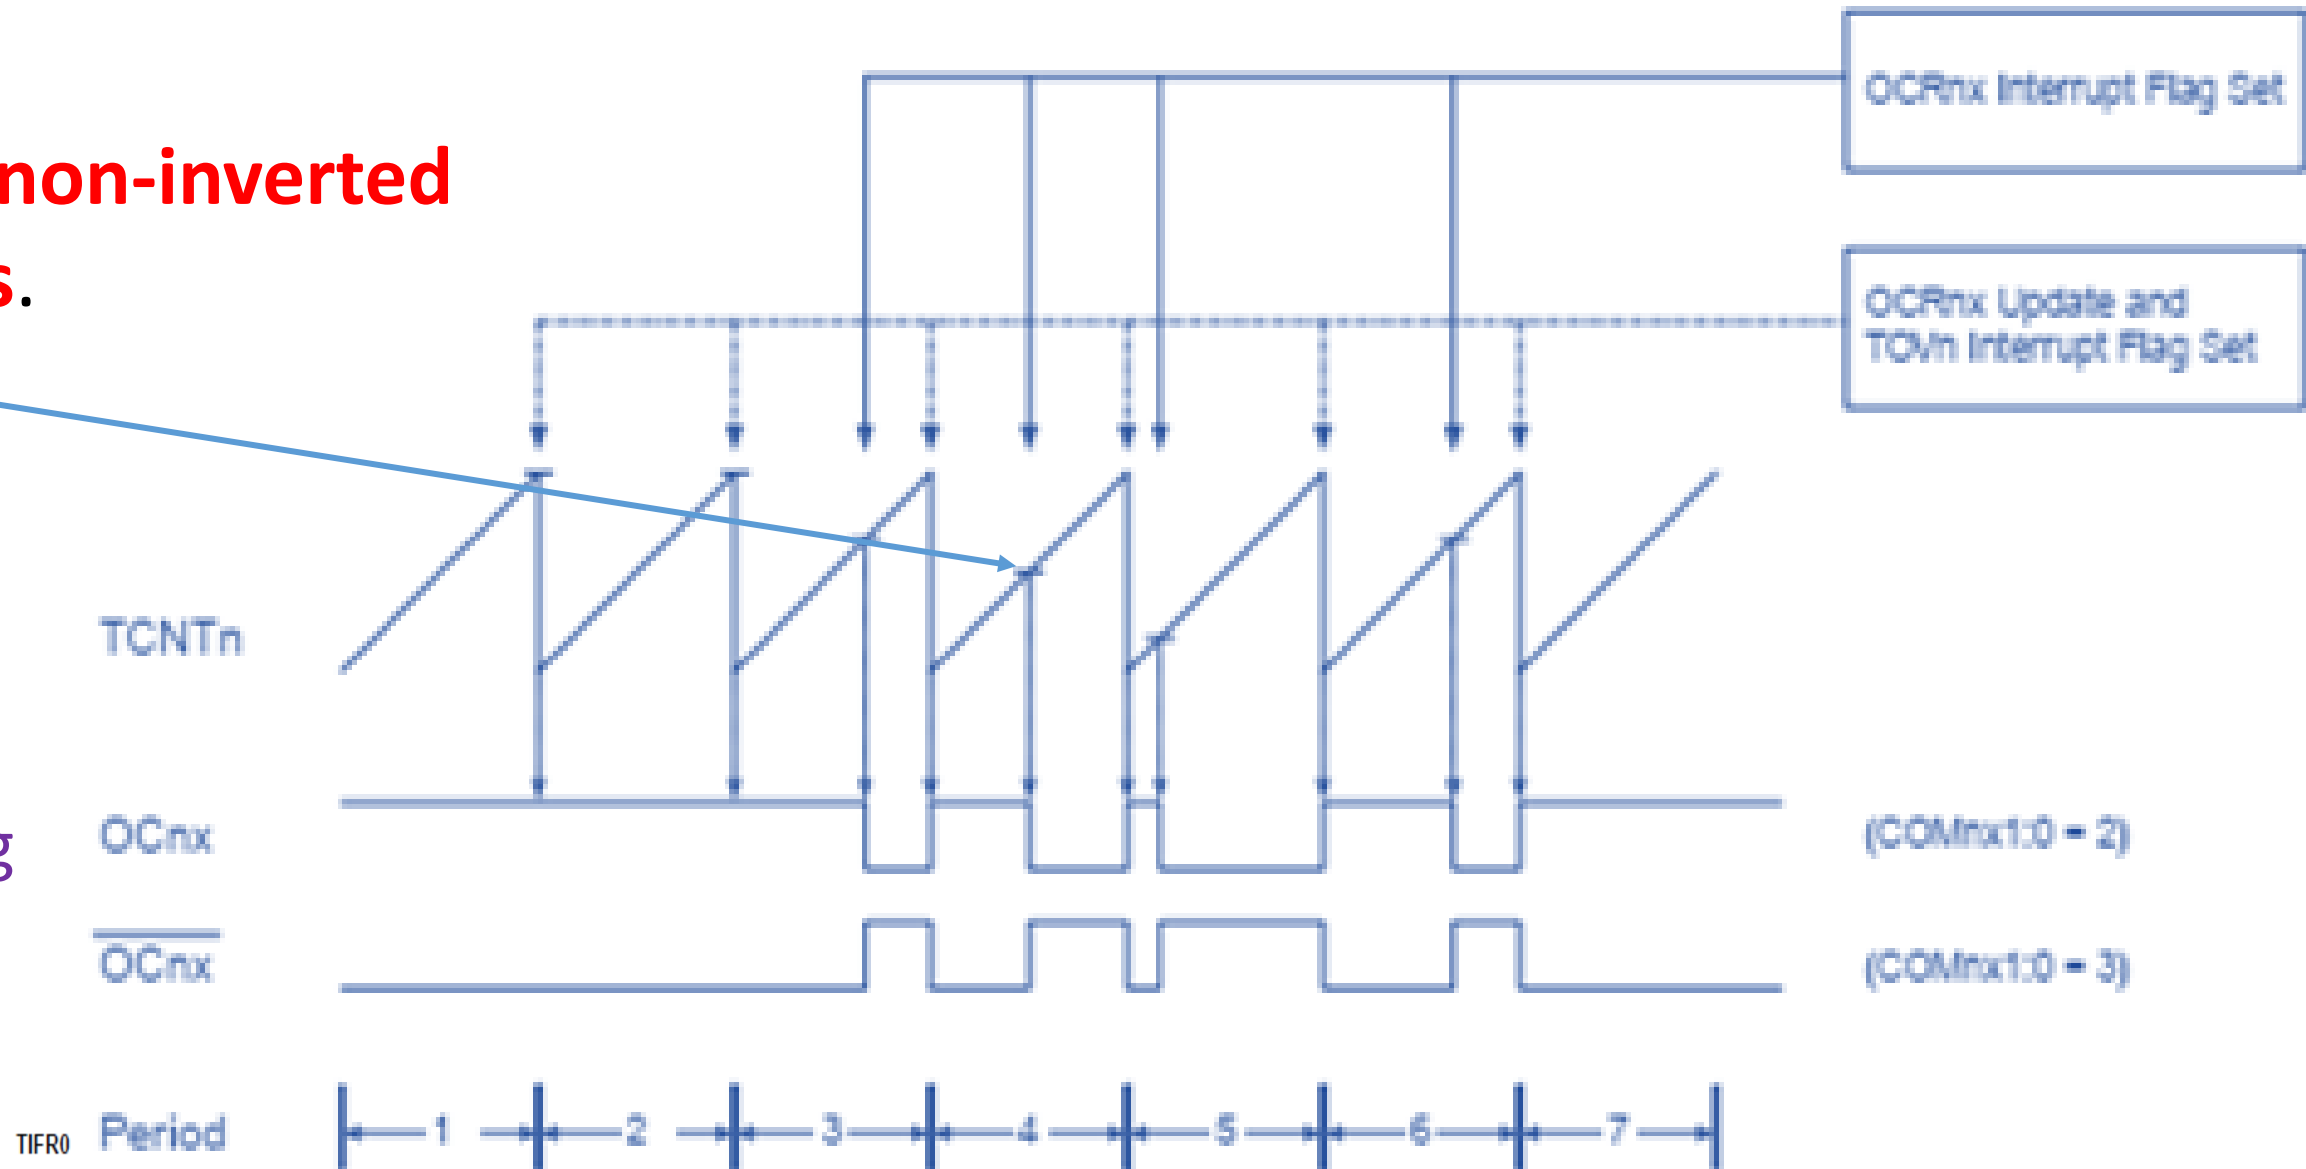


Fig. 12.6 Timing Diagram of Fast PWM Mode

Fast PWM Mode: Output Frequency

- The actual **OC0x** value will only be visible on the **port pin** if the data direction for the port pin is **set as output**.
- The PWM waveform is generated by **setting (or clearing) the OC0x Register** at the **compare match between OCR0x and TCNT0 and** clearing (or setting) the OC0x Register at the timer clock cycle the counter is cleared (i.e., from TOP to BOTTOM).
- The PWM frequency for the output can be calculated by the following equation:

$$f_{OCnxPWM} = \frac{f_{clk_IO}}{N \times 256}$$

- The N variable represents the pre-scale factor (1, 8, 64, 256, or 1024).
- The waveform generated will have a maximum frequency of $f_{OC0} = f_{clk_IO}$ when OCR0A is **set to zero**, otherwise the formula would be, $f_{OC0x} = \frac{f_{clk_IO}}{N \times (1 + OCRnx)}$

Fast PWM Mode: Output Frequency

- **Non-Inverting Fast PWM Duty Cycle**
- The duty cycle of the **Non-Inverting mode** Fast PWM signal is calculated using the following formula.

$$OCR0x = \frac{256D}{100} - 1; x = A \text{ or } B, \text{ if } TOP = 0xFF$$

$$OCR0B = \frac{(1+OCR0A)D}{100} - 1, \text{ if } TOP = OCR0A$$

where, D is the Duty cycle that range from 0% to 100%. This duty cycle value is the count value that must be loaded into the OCR0A (or OCR0B) register.

- **Example:** 1) A PWM signal is to have 75% duty cycle. Compute the value for OCR0A.

$$OCR0A = \frac{256 \times 75}{100} - 1 = 192 - 1 = 191, \text{ if } TOP = 0xFF$$

- 2) A PWM signal is to have 75% duty cycle. Compute the value for OCR0B if OCR0A = 200.

$$OCR0B = \frac{(1+200)75}{100} - 1 = 151 - 1 = 150, \text{ if } TOP = OCR0A = 200$$

Fast PWM Mode: Output Frequency

- **Inverting Fast PWM Duty Cycle**
- The **formula for frequency** computation is the **same** as for **non-inverting** fast PWM. However, the duty cycle of the **Inverting mode** Fast PWM signal is calculated as follows

$$OCR0x = 255 - \frac{256D}{100}; \quad x = A \text{ or } B, \text{ if } \mathbf{TOP = 0xFF}$$

$$OCR0B = OCR0A - \frac{(1+OCR0A)D}{100}; \quad x = A \text{ or } B, \text{ if } \mathbf{TOP = OCR0A}$$

,where D is the Duty cycle that ranges from 0% to 100%. This duty cycle value is the count value that must be loaded into the OCR0A (or OCR0B) register.

- **Example:** 1) PWM signal is to have 75% duty cycle. Compute the value for OCR0A.

$$OCR0A = 255 - \frac{256 \times 75}{100} = 255 - 192 = 63, \text{ if } \mathbf{TOP = 0xFF}$$

- 2) PWM signal is to have 75% duty cycle. Compute the value for OCR0B if OCR0A = 200.

$$OCR0B = OCR0A - \frac{(1+OCR0A)D}{100} = 200 - \frac{(1+200)75}{100} = 200 - 151 = 49, \text{ if } \mathbf{TOP = OCR0A = 200}$$

Phase correct PWM Mode

- The phase correct PWM mode (**WGM02:0 = 1 or 5**) provides a **high-resolution phase correct PWM waveform generation option**. The phase correct PWM mode is based on a **dual-slope operation**. The counter counts repeatedly from BOTTOM to TOP and then from TOP to BOTTOM.
- In non-inverting Compare Output mode, the **Output Compare (OC0x) is cleared** on the **compare match between TCNT0 and OCR0x** while **up counting** and **set on the compare match while down counting**.
- In inverting Output Compare mode, the operation is inverted.
- The dual-slope operation has a lower maximum operation frequency than the single-slope operation.
- However, due to the **symmetric feature of the dual-slope PWM modes**, these modes are **preferred for motor control applications**.

Phase correct PWM Mode

- In phase correct PWM mode, the counter is incremented until the counter value matches TOP. **When the counter reaches TOP, it changes the count direction.**
- The TCNT0 value will be equal to TOP for one timer clock cycle. The timing diagram for the phase correct PWM mode is shown on **Figure 12.7**.
- The TCNT0 value is in the timing diagram shown as a histogram for illustrating the **dual-slope operation**.
- The diagram includes non-inverted and inverted PWM outputs.
- The small horizontal line marks on the TCNT0 slopes represent compare matches between OCR0x and TCNT0.

- The diagram includes non-inverted and inverted PWM outputs.
- The **small horizontal line marks** on the TCNT0 slopes represent **compare matches between OCR0x and TCNT0**.
- The **Timer/Counter Overflow Flag (TOV0)** is set each time the counter reaches **BOTTOM**.
- The **Interrupt Flag** can be used to **generate an interrupt** each time the **counter reaches the BOTTOM** value.

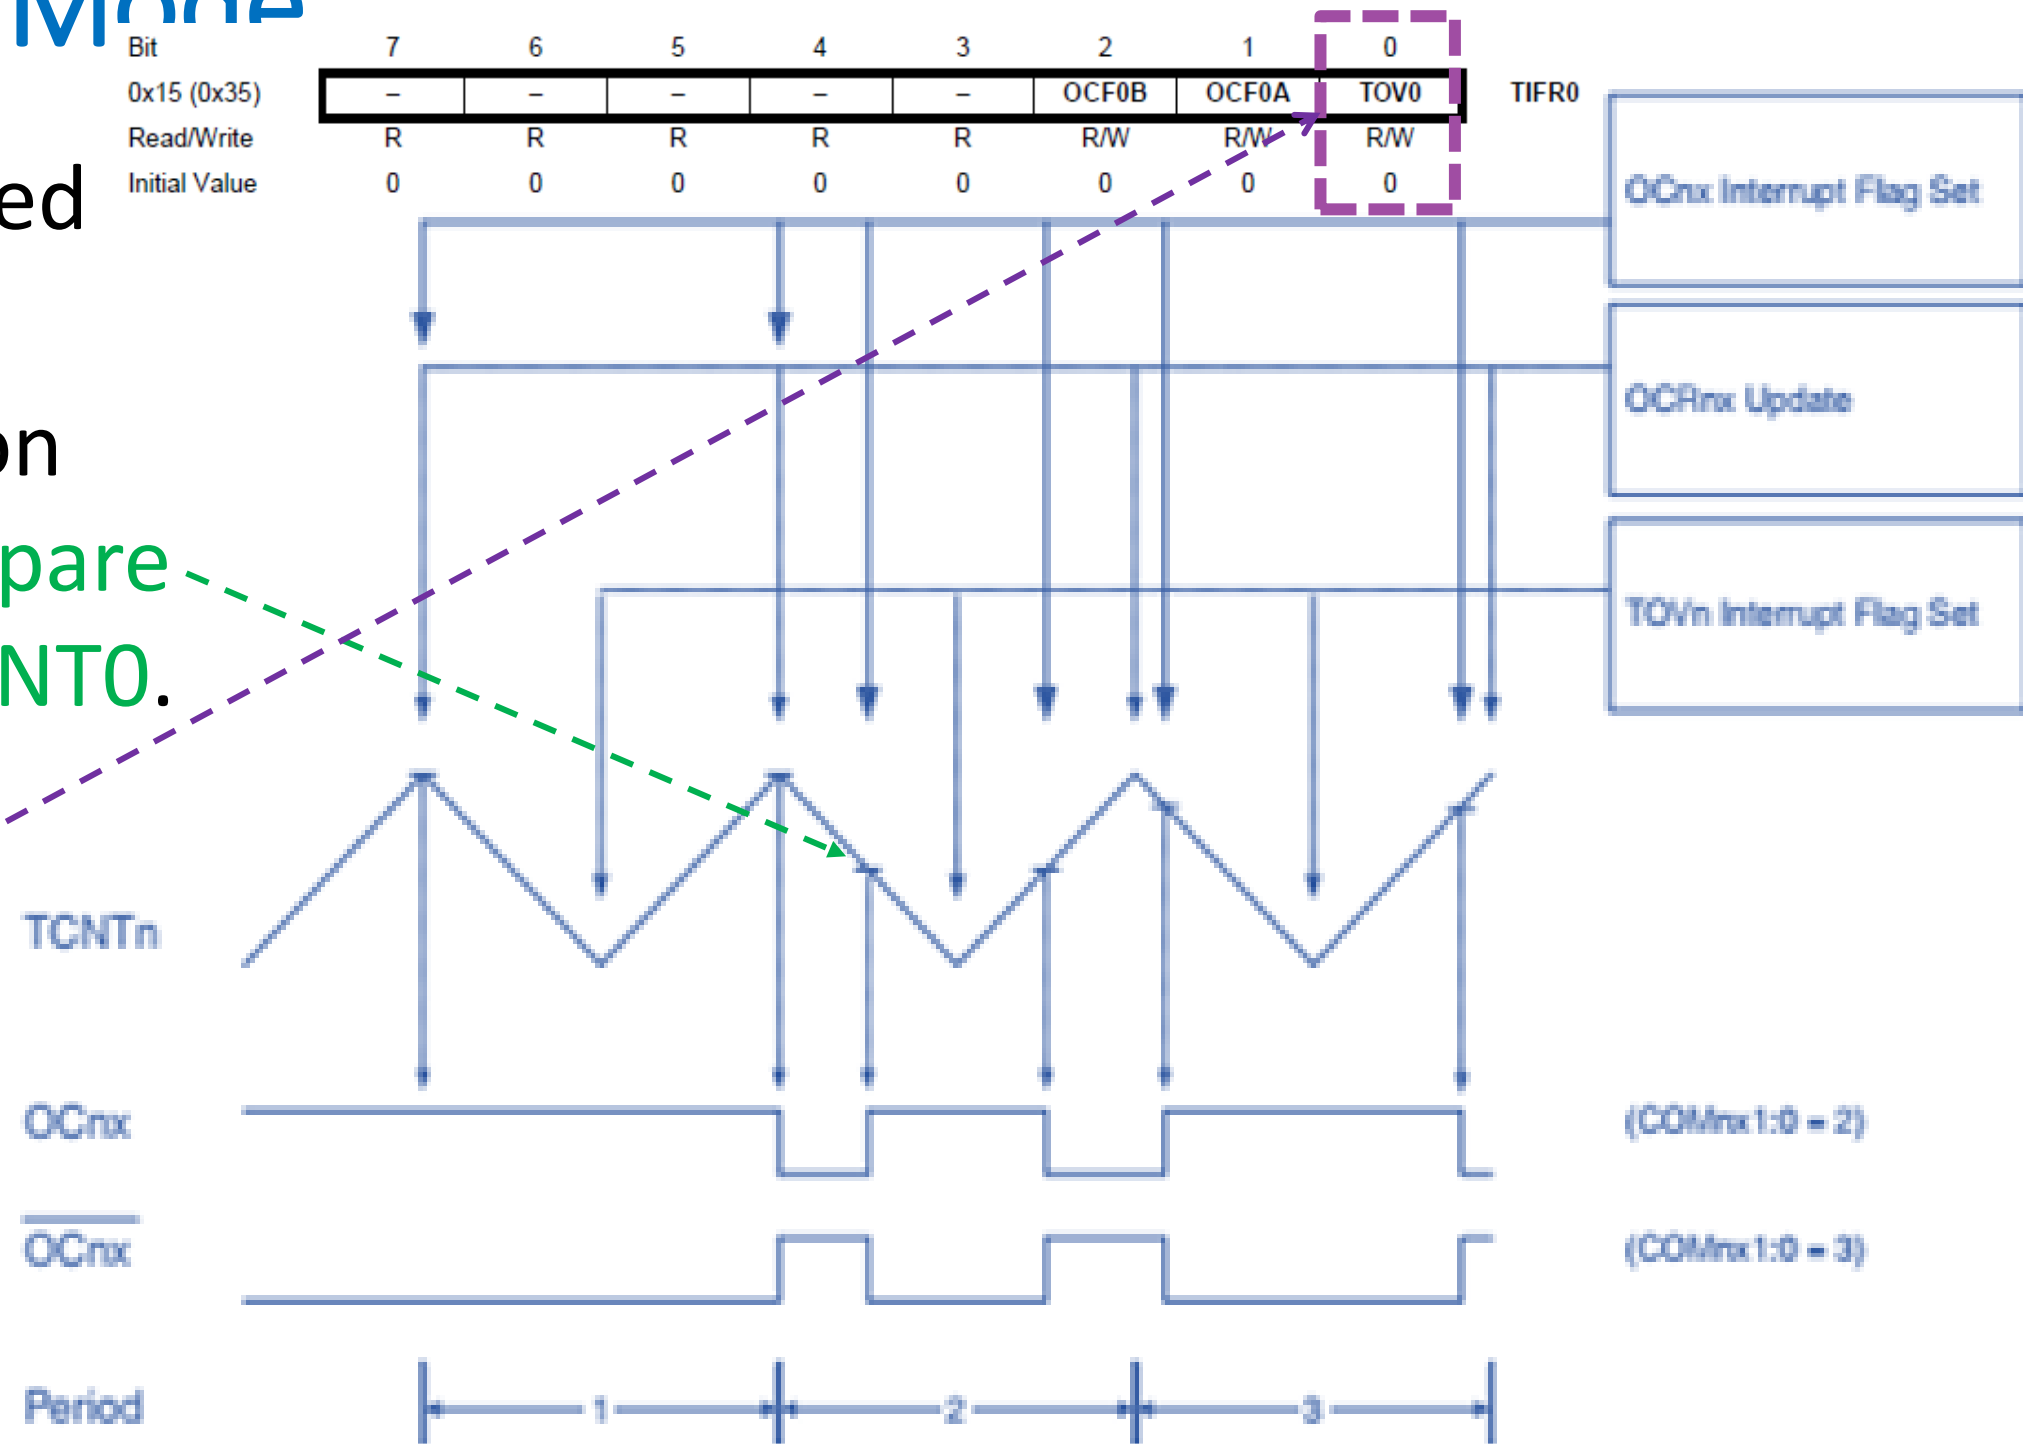


Figure 12.7 Timing Diagram of the Phase Correct PWM Mode

Phase Correct PWM Mode

In Phase Correct PWM mode, the compare unit allows the generation of PWM waveforms on the OC0x pins. [Table 12.7](#) shows the COM0B1:0 bit functionality when the WGM02:0 bits are set to Phase Correct PWM mode.

Table 12-7. Compare Output Mode, Phase Correct PWM Mode⁽¹⁾

COM0B1	COM0B0	Description
0	0	Normal port operation, OC0B disconnected.
0	1	Reserved
1	0	<u>Clear OC0B on Compare Match when up-counting. Set OC0B on Compare Match when down-counting.</u> Non-inverted PWM Output
1	1	<u>Set OC0B on Compare Match when up-counting. Clear OC0B on Compare Match when down-counting.</u> Inverted PWM Output

Phase-Correct PWM Mode

- In phase-correct PWM mode, the compare unit allows the generation of PWM waveforms on the OC0x pins. Setting the COM0x1:0 bits to **10** will produce a **non-inverted PWM output signal**.
- An **inverted PWM output signal** can be generated by setting the COM0x1:0 to **11**.
- Setting the COM0A0 bits to **01** allows the **OC0A pin** to toggle on Compare Matches if the WGM02 bit is set. This option is not available for the OC0B pin (**Table 12-7**).

Bit	7	6	5	4	3	2	1	0	
0x24 (0x44)	COM0A1	COM0A0	COM0B1	COM0B0	–	–	WGM01	WGM00	TCCR0A
Read/Write	R/W	R/W	R/W	R/W	R	R	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	
Bit	7	6	5	4	3	2	1	0	
0x25 (0x45)	FOC0A	FOC0B	–	–	WGM02	CS02	CS01	CS00	TCCR0B
Read/Write	W	W	R	R	R/W	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

Phase correct PWM Mode

- The PWM waveform is generated by clearing (or setting) the OC0x Register at the compare match between OCR0x and TCNT0 when the counter increments, and setting (or clearing) the OC0x Register at compare match between OCR0x and TCNT0 when the counter decrements.
- The PWM frequency for the output when using phase correct PWM can be calculated by the following equation:

$$f_{OCnxPCPWM} = \frac{f_{clk_IO}}{N \times 510}$$

- The N variable represents the pre-scale factor (1, 8, 64, 256, or 1024).
- The waveform generated will have a maximum frequency of $f_{OC0,max} = f_{clk_IO}$ when OCR0A is **set to zero**, otherwise the formula would be, $f_{OC0x} = \frac{f_{clk_IO}}{2N \times OCRnx}$.

Phase correct PWM Mode

- The **extreme values for the OCR0A Register represent special cases** when generating a PWM waveform output in the phase correct PWM mode.
- If the **OCR0A is set equal to BOTTOM**, the output will be continuously low and if set equal to MAX the output will be continuously high for non-inverted PWM mode.
- For inverted PWM, the output will have the opposite logic values.

Example to Self-Practice:

Calculate the PWM frequency for the output when using Fast PWM Mode and Phase Correct PWM Mode when f_{clk_IO} is **10 MHz** and the pre-scale factors are **1, 8, 64, 256, or 1024**. Comment on the results afterward.

Solution:

The PWM frequency for the **Fast PWM Mode**:

$$f_{OCnxFPWM} = \frac{f_{clk_IO}}{N \times 256} = \frac{10}{1024 \times 256} = 38.15 \text{ Hz}$$

The PWM frequency for the **Phase Correct PWM Mode**:

$$f_{OCnxPCPWM} = \frac{f_{clk_IO}}{N \times 510} = \frac{10}{1024 \times 510} = 19.15 \text{ Hz}$$

Phase-Correct PWM Mode: Output Frequency

- **Non-Inverting Phase-Correct PWM Duty Cycle**
- The duty cycle of the **Non-Inverting mode** Phase-Correct PWM signal is calculated using the following formula.

$$OCR0x = \frac{255D}{100}; x = A \text{ or } B, \text{ if } TOP = 0xFF$$

$$OCR0B = \frac{OCR0A \times D}{100}, \text{ if } TOP = OCR0A$$

where, D is the Duty cycle that range from 0% to 100%. This duty cycle value is the count value that must be loaded into the OCR0A (or OCR0B) register.

- **Example:** 1) A PWM signal is to have 75% duty cycle. Compute the value for OCR0A.

$$OCR0A = \frac{255 \times 75}{100} = 192, \text{ if } TOP = 0xFF$$

- 2) A PWM signal is to have 75% duty cycle. Compute the value for OCR0B if OCR0A = 200.

$$OCR0B = \frac{200 \times 75}{100} = 150, \text{ if } TOP = OCR0A = 200$$

Phase-Correct PWM Mode: Output Frequency

- **Inverting Phase-Correct PWM Duty Cycle**
- The **formula for frequency** computation is the **same** as for **non-inverting** PC PWM. But the duty cycle of the **Inverting mode** Phase-Correct PWM signal is calculated as follows

$$OCR0x = 255 - \frac{255D}{100}; \quad x = A \text{ or } B, \text{ if } \mathbf{TOP = 0xFF}$$

$$OCR0B = OCR0A - \frac{OCR0A \times D}{100}; \quad x = A \text{ or } B, \text{ if } \mathbf{TOP = OCR0A}$$

,where D is the Duty cycle that ranges from 0% to 100%. This duty cycle value is the count value that must be loaded into the OCR0A (or OCR0B) register.

- **Example:** 1) PWM signal is to have 75% duty cycle. Compute the value for OCR0A.

$$OCR0A = 255 - \frac{255 \times 75}{100} = 255 - 192 = 63, \text{ if } \mathbf{TOP = 0xFF}$$


- 2) PWM signal is to have 75% duty cycle. Compute the value for OCR0B if OCR0A = 200.

$$OCR0B = OCR0A - \frac{OCR0A \times D}{100} = 200 - \frac{200 \times 75}{100} = 200 - 150 = 50, \text{ if } \mathbf{TOP = OCR0A = 200}$$

Important!

Note that in those WGM modes where OCR0A sets the frequency (modes 2, 5, and 7) then you can't do PWM on channel A (**because OCR0A couldn't be used for two things at once, i.e., setting both PWM frequency and duty cycle!**).

So, the **only active PWM channel** in those modes is **channel B** and you set the duty cycle of that (as always) **with OCR0B** (set to some value between 0 and the OCR0A upper limit). As such, the PWM output will be on **digital pin 05 (PD5)**.

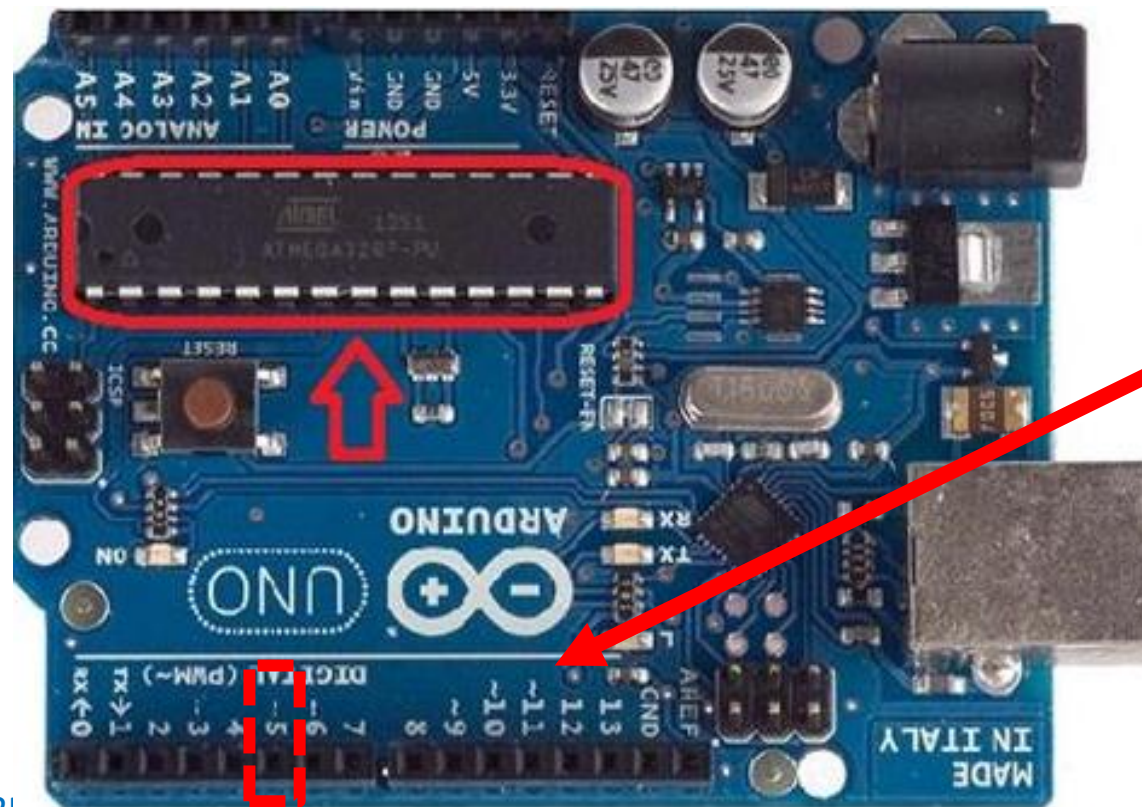

The PWM output for **channel A with OCR0A** will be on **digital pin 06 (PD6)**.


Example for Practice

Use ATmega328p **Timer 0 Fast PWM mode 7 with TOP** at OCR0A and toggle on **OC0A pin (PD06)**. Calculate the **PWM frequency**. The frequency changes with OCR0A values (100 and 200) loaded. **Calculate** the fast PWM frequency and duty cycle in this mode. The Pre-scaler value, $N = 1$, and the system clock frequency, $f_{clk_{IO}} = 16 \text{ MHz}$.

The PWM frequency for the **Fast PWM Mode**:

$$f_{OC0AFPWM} = \frac{f_{clk_{IO}}}{N \times (1 + OCR0A)} = \frac{16}{1 \times 101} = 158.4 \text{ kHz}$$

$$f_{OC0AFPWM} = \frac{f_{clk_{IO}}}{N \times (1 + OCR0A)} = \frac{16}{1 \times 201} = 79.2 \text{ kHz}$$

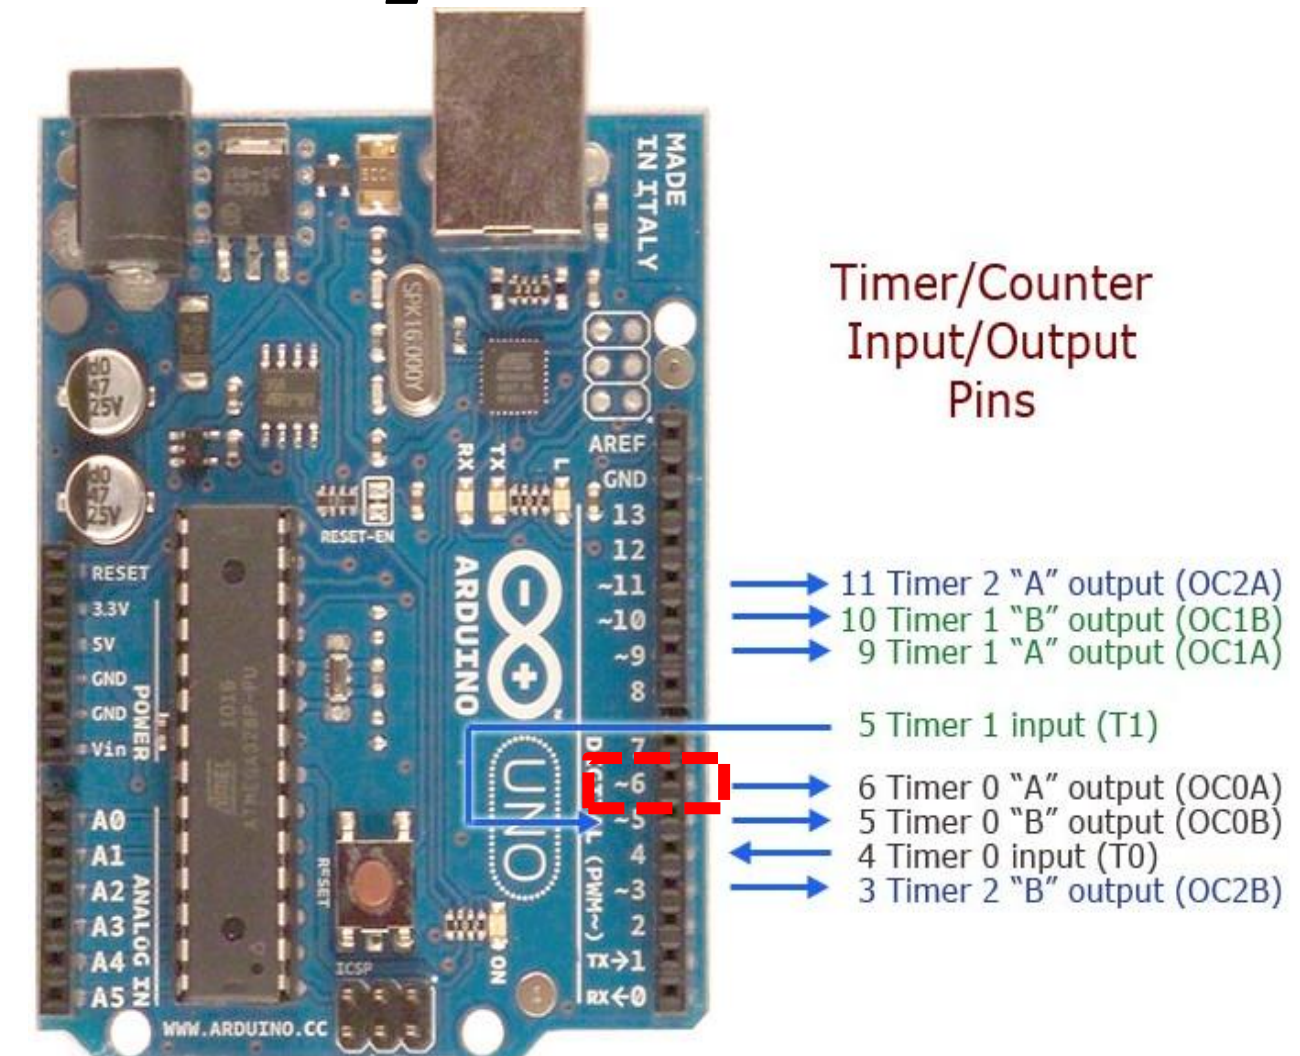

Programming Arduino for Fast PWM

```
#ifndef F_CPU
#define F_CPU 16000000UL // Clock frequency is 16 MHz
#endif
#include <avr/io.h>
```

```
int main() {
    // OC0B pin is set as PWM output pin by sending a HIGH to Port D's Data Direction Register, DDRD
    DDRD |= (1<<PD5);
    OCR0B = 191; // Load 191 into OCR0B for setting its duty cycle to 75% (See previous example, slide # 13*)
    // Configure TCCR0A and TCCR0B register for (i) non-inverting (10), (ii) Fast PWM mode 3 (011),
    // (iii) Pre-scalar (101) for frequency control. By default, 0s are there, but you may set them explicitly.
    TCCR0A |= (1 << COM0B1) | (1<<WGM01) | (1<<WGM00);
    TCCR0B |= (1<<CS02) | (1<<CS00); // CS02:00 = 101, N = 1024
    // TCCR0A=0b00100011; TCCR0B=0b00000101
    while(1);
    return 0;
}
```

* A PWM signal is to have 75% duty cycle. Compute the value for OCR0B if TOP = 0xFF.

$$OCR0B = \frac{256 \times 75}{100} - 1 = 192 - 1 = 191, \text{ if } TOP = 0xFF$$

Bit	7	6	5	4	3	2	1	0	
0x24 (0x44)	COM0A1	COM0A0	COM0B1	COM0B0	–	–	WGM01	WGM00	TCCR0A
Read/Write	R/W	R/W	R/W	R/W	R	R	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

Bit	7	6	5	4	3	2	1	0	
0x25 (0x45)	FOC0A	FOC0B	–	–	WGM02	CS02	CS01	CS00	TCCR0B
Read/Write	W	W	R	R	R/W	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

CS02	CS01	CS00	Description
0	0	0	No clock source (Timer/Counter stopped)
0	0	1	clk _{IO} /(No prescaling)
0	1	0	clk _{IO} /8 (From prescaler)
0	1	1	clk _{IO} /64 (From prescaler)
1	0	0	clk _{IO} /256 (From prescaler)
1	0	1	clk _{IO} /1024 (From prescaler)
1	1	0	External clock source on T0 pin. Clock on falling edge.
1	1	1	External clock source on T0 pin. Clock on rising edge.

- The difference between the mode **3(1)** and mode **7(5)** Fast PWMs is their TOP values.
- For mode **3(1)**, the TOP value is fixed (0xFF), whereas that for mode **7(5)** is OCRnA value.
- If mode **7(5)** is used, then we must **load a count value** into the **OCRnA register**.
- Once a mode is selected, the timer/counter starts counting from BOTTOM to TOP value and when the TOP value is reached the counting is repeated from BOTTOM.

Mode	WGM02	WGM01	WGM00	Timer/Counter Mode of Operation	TOP	Update of OCRx at	TOV Flag Set on ⁽¹⁾⁽²⁾
0	0	0	0	Normal	0xFF	Immediate	MAX
1	0	0	1	PWM, Phase Correct	0xFF	TOP	BOTTOM
2	0	1	0	CTC	OCRA	Immediate	MAX
3	0	1	1	Fast PWM	0xFF	BOTTOM	MAX
4	1	0	0	Reserved	—	—	—
5	1	0	1	PWM, Phase Correct	OCRA	TOP	BOTTOM
6	1	1	0	Reserved	—	—	—
7	1	1	1	Fast PWM	OCRA	BOTTOM	TOP

The table in the right shows the **WGM bits combination** for mode 3 and mode 7.

Fast PWM Mode: Setting Modes

In the fast PWM mode, the Compare Output Mode bits COM0A1, COM0A0 (in the TCCR0A register) for the output at OC0A and bits COM0B1, COM0B0 (in the TCCR0B register) for the output at OC0B, are used to configure the output as either non-inverting or inverting mode of operation. Table 12-3 shows how to select COM0A1, COM0A0 bits to generate non-inverting and inverting mode's fast PWM waveform.

Table 12-3. Compare Output Mode, Fast PWM Mode⁽¹⁾


COM0A1	COM0A0	Description
0	0	Normal port operation, OC0A disconnected.
0	1	WGM02 = 0: Normal Port Operation, OC0A Disconnected. WGM02 = 1: Toggle OC0A on Compare Match.
1	0	<u>Clear OC0A on Compare Match, set OC0A at BOTTOM, (non-inverting mode).</u>
1	1	<u>Set OC0A on Compare Match, clear OC0A at BOTTOM, (inverting mode).</u>

Fast PWM Mode: Setting Modes

In the fast PWM mode, the compare unit allows the generation of PWM waveforms on the OC0x pins. [Table 12.6](#) shows the COM0B1:0 bits' functionality when the WGM02:0 bits are set to the fast PWM mode.

Table 12-6. Compare Output Mode, Fast PWM Mode⁽¹⁾

COM0B1	COM0B0	Description
0	0	Normal port operation, OC0B disconnected.
0	1	Reserved
1	0	<u>Clear OC0B on Compare Match, set OC0B at BOTTOM, (non-inverting mode)</u>
1	1	<u>Set OC0B on Compare Match, clear OC0B at BOTTOM, (inverting mode).</u>

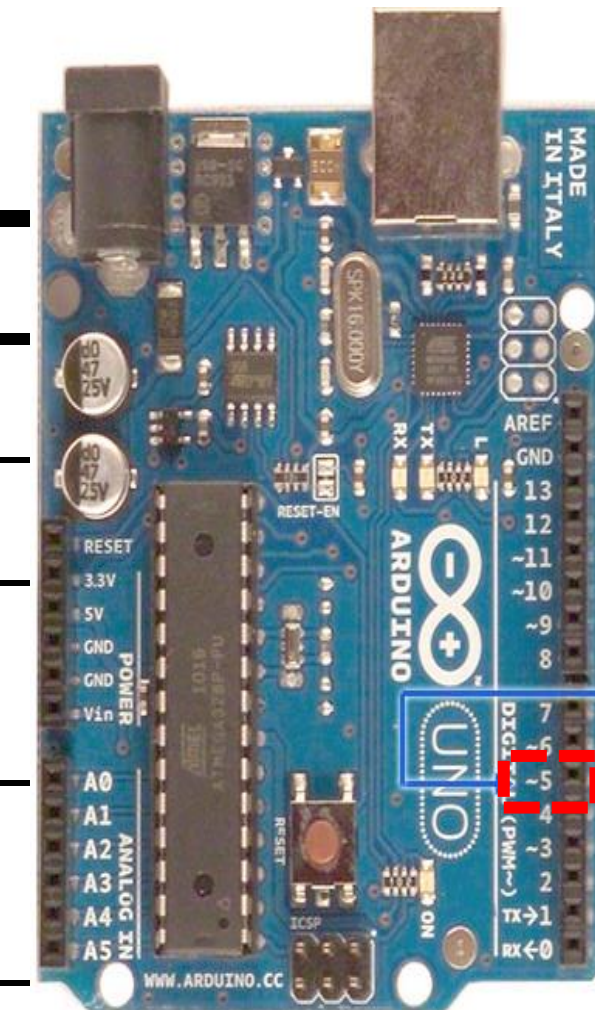

Timer/Counter
Input/Output
Pins



- 11 Timer 2 "A" output (OC2A)
- 10 Timer 1 "B" output (OC1B)
- 9 Timer 1 "A" output (OC1A)
- 5 Timer 1 input (T1)
- 6 Timer 0 "A" output (OC0A)
- 5 Timer 0 "B" output (OC0B)
- 4 Timer 0 input (T0)
- 3 Timer 2 "B" output (OC2B)

Note: 1. A special case occurs when OCR0B equals TOP and COM0B1 is set. In this case, the Compare Match is ignored, but the set or clear is done at TOP. See ["Fast PWM Mode" on page 101](#) for more details.

Programming Arduino for Fast PWM

The waveform generated will have a frequency of

$$f_{OC0BFPWM} = \frac{f_{clk_{IO}}}{N \times 256} = \frac{16 \times 10^6}{1024 \times 256} = 61.04 \text{ Hz.}$$

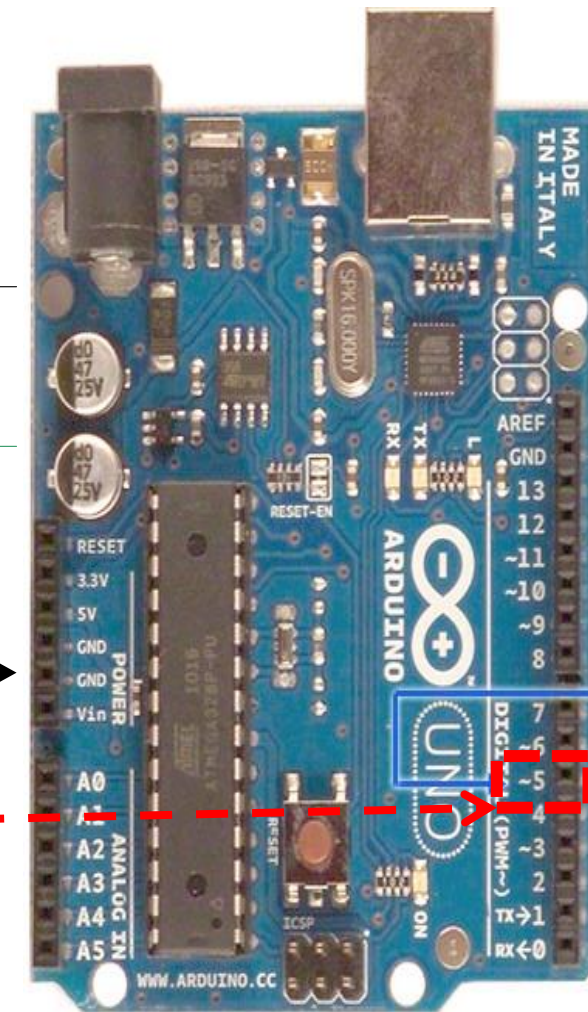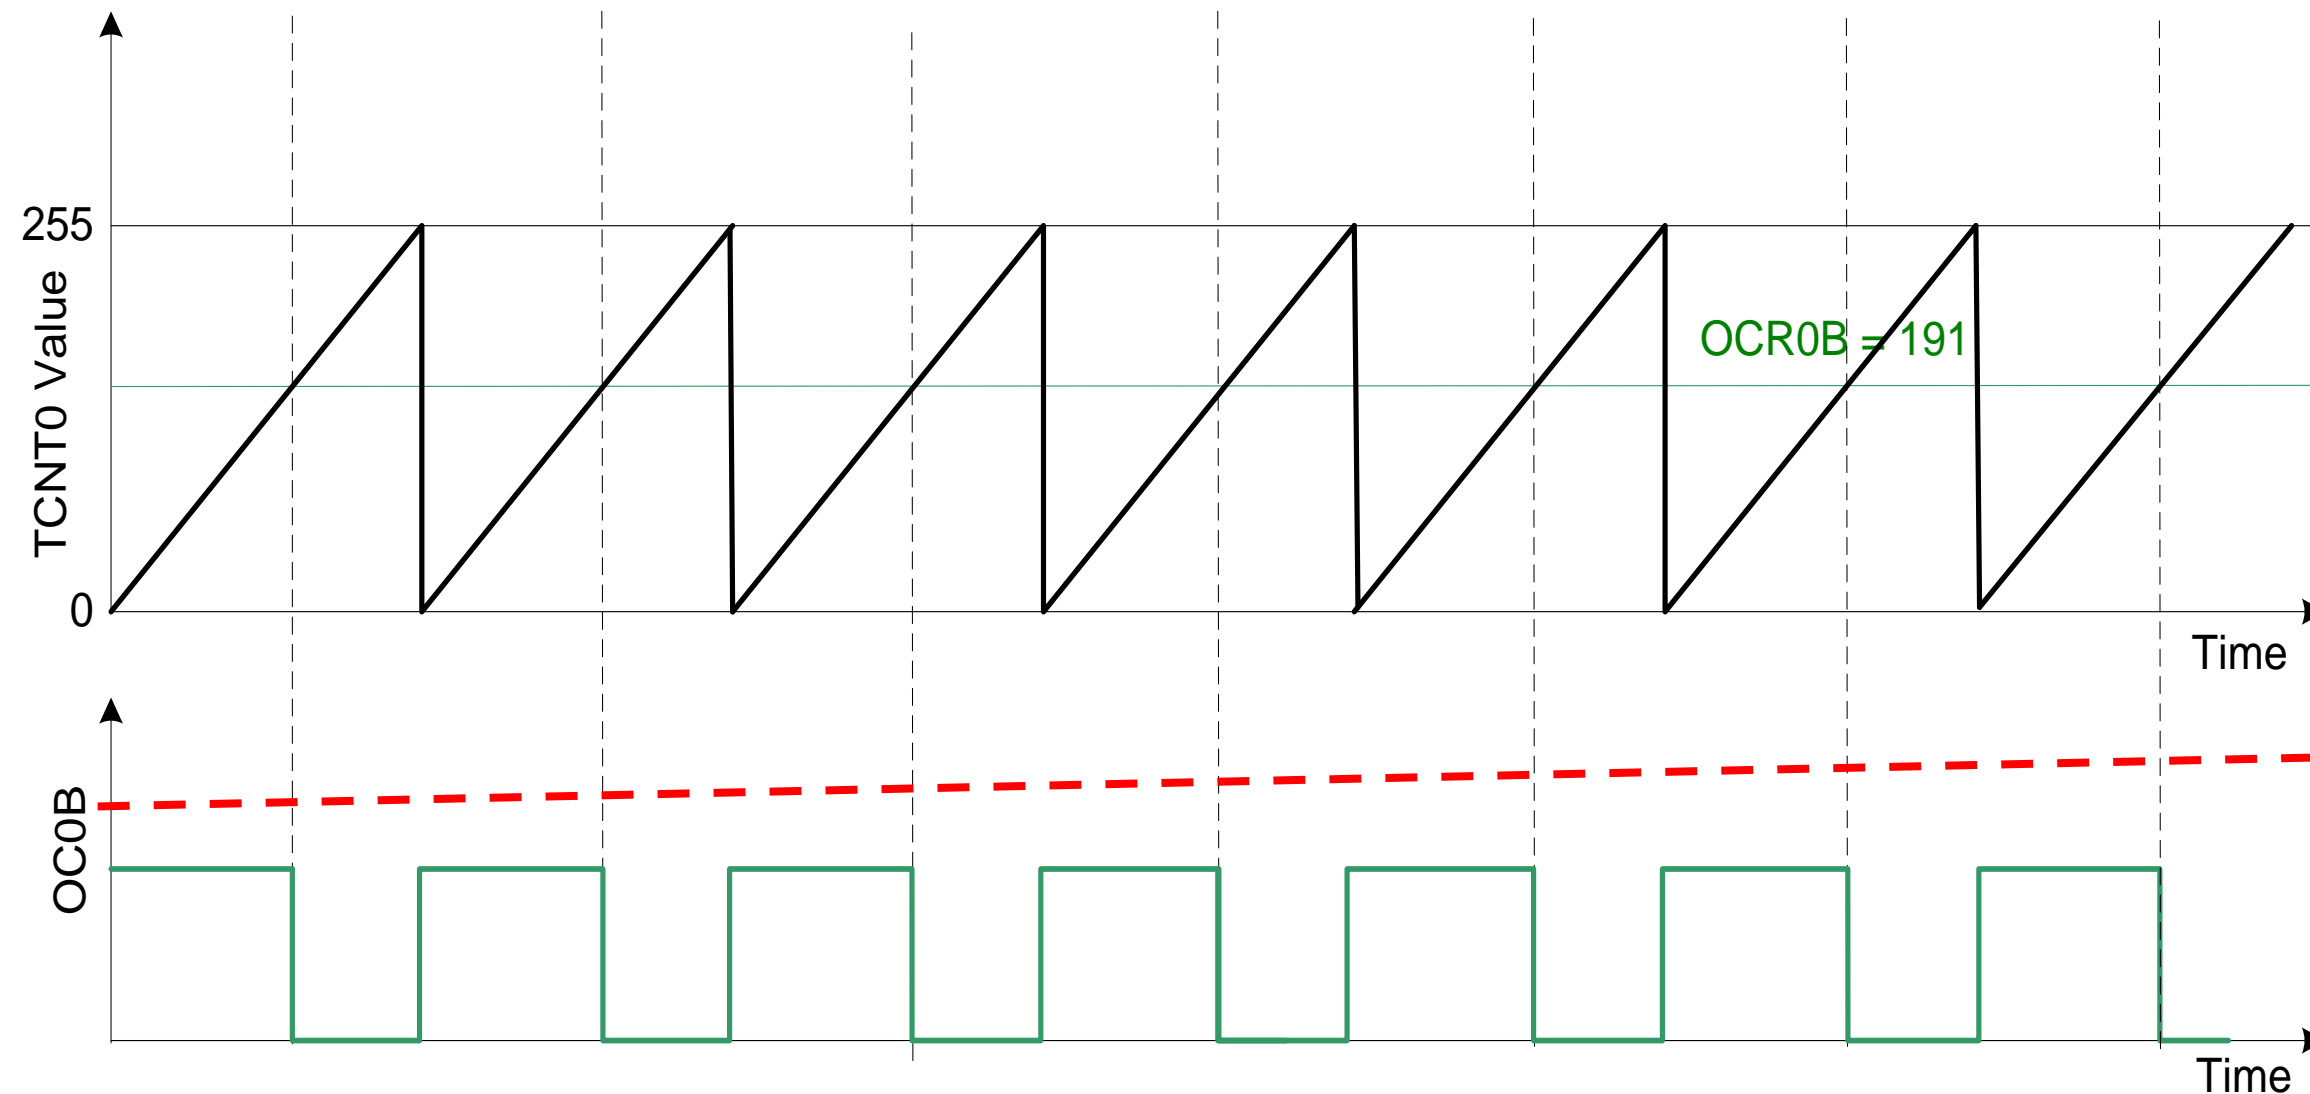

Timer/Counter
Input/Output
Pins

- 11 Timer 2 "A" output (OC2A)
- 10 Timer 1 "B" output (OC1B)
- 9 Timer 1 "A" output (OC1A)
- 5 Timer 1 input (T1)
- 6 Timer 0 "A" output (OC0A)
- 5 Timer 0 "B" output (OC0B)
- 4 Timer 0 input (T0)
- 3 Timer 2 "B" output (OC2B)

Programming Arduino for Fast PWM

```
#ifndef F_CPU
#define F_CPU 8000000UL // Clock frequency is 8 MHz
#endif
#include <avr/io.h>
```

```
int main() {
    // OC0B pin is set as PWM output pin by sending a HIGH to Port D's Data Direction Register, DDRD
    DDRD |= (1<<PD5);
    OCR0A = 200; // Top Value of 200 (must be equal or greater than the OCR0B)
    OCR0B = 140; // Load 140 into OCR0B for setting its duty cycle to 70% (See previous example, slide # 13*)
    // Configure TCCR0A and TCCR0B register for (i) non-inverting (10), (ii) Fast PWM mode 7 (111),
    // (iii) Pre-scalar (011) for frequency control. By default, 0s are there, but you may set them explicitly.
    TCCR0A |= (1 << COM0B1) | (1<<WGM01) | (1<<WGM00);
    TCCR0B |= (1<<WGM02) | (1<<CS01) | (1<<CS00); // CS02:00 = 011, N = 64
    // TCCR0A=0b00100011; TCCR0B=0b00001011
    while(1);
    return 0;
}
```

* A PWM signal is to have 70% duty cycle. Compute the value for OCR0B if OCR0A = 200.

$$OCR0B = \frac{(1+200)70}{100} - 1 = 141 - 1 = 140, \text{ if } \mathbf{TOP = OCR0A = 200}$$

Bit	7	6	5	4	3	2	1	0	
0x24 (0x44)	COM0A1	COM0A0	COM0B1	COM0B0	–	–	WGM01	WGM00	TCCR0A
Read/Write	R/W	R/W	R/W	R/W	R	R	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	



Bit	7	6	5	4	3	2	1	0	
0x25 (0x45)	FOC0A	FOC0B	–	–	WGM02	CS02	CS01	CS00	TCCR0B
Read/Write	W	W	R	R	R/W	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

CS02	CS01	CS00	Description
0	0	0	No clock source (Timer/Counter stopped)
0	0	1	clk _{I/O} /(No prescaling)
0	1	0	clk _{I/O} /8 (From prescaler)
0	1	1	clk _{I/O} /64 (From prescaler)
1	0	0	clk _{I/O} /256 (From prescaler)
1	0	1	clk _{I/O} /1024 (From prescaler)
1	1	0	External clock source on T0 pin. Clock on falling edge.
1	1	1	External clock source on T0 pin. Clock on rising edge.

Programming Arduino for Fast PWM

The waveform generated will have a frequency of

$$f_{OC0BFPWM} = \frac{f_{clk_{IO}}}{N \times (1 + OCR0A)} = \frac{8 \times 10^6}{64 \times (1 + 200)} \cong 622 \text{ Hz.}$$

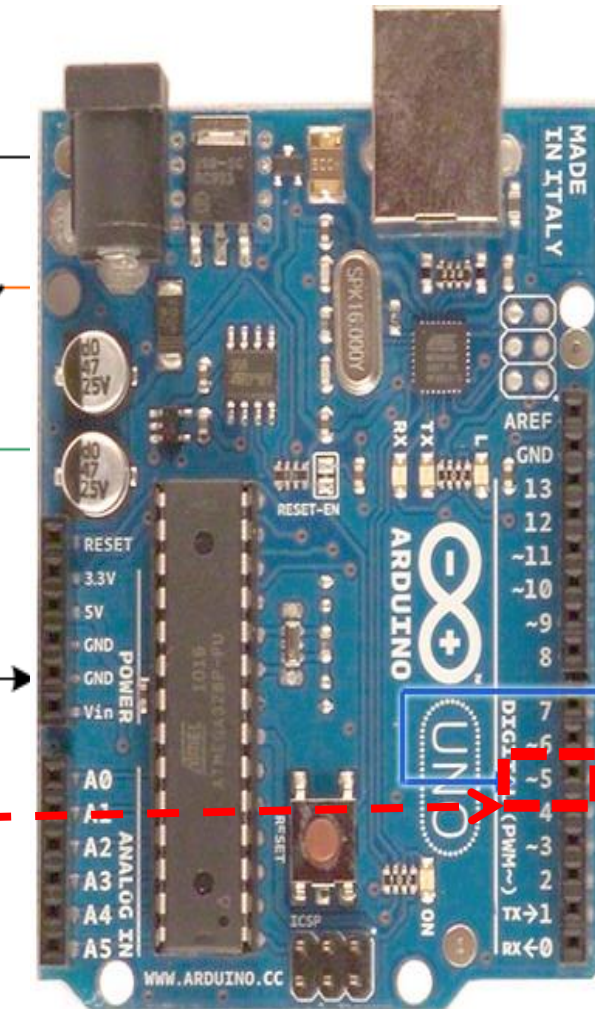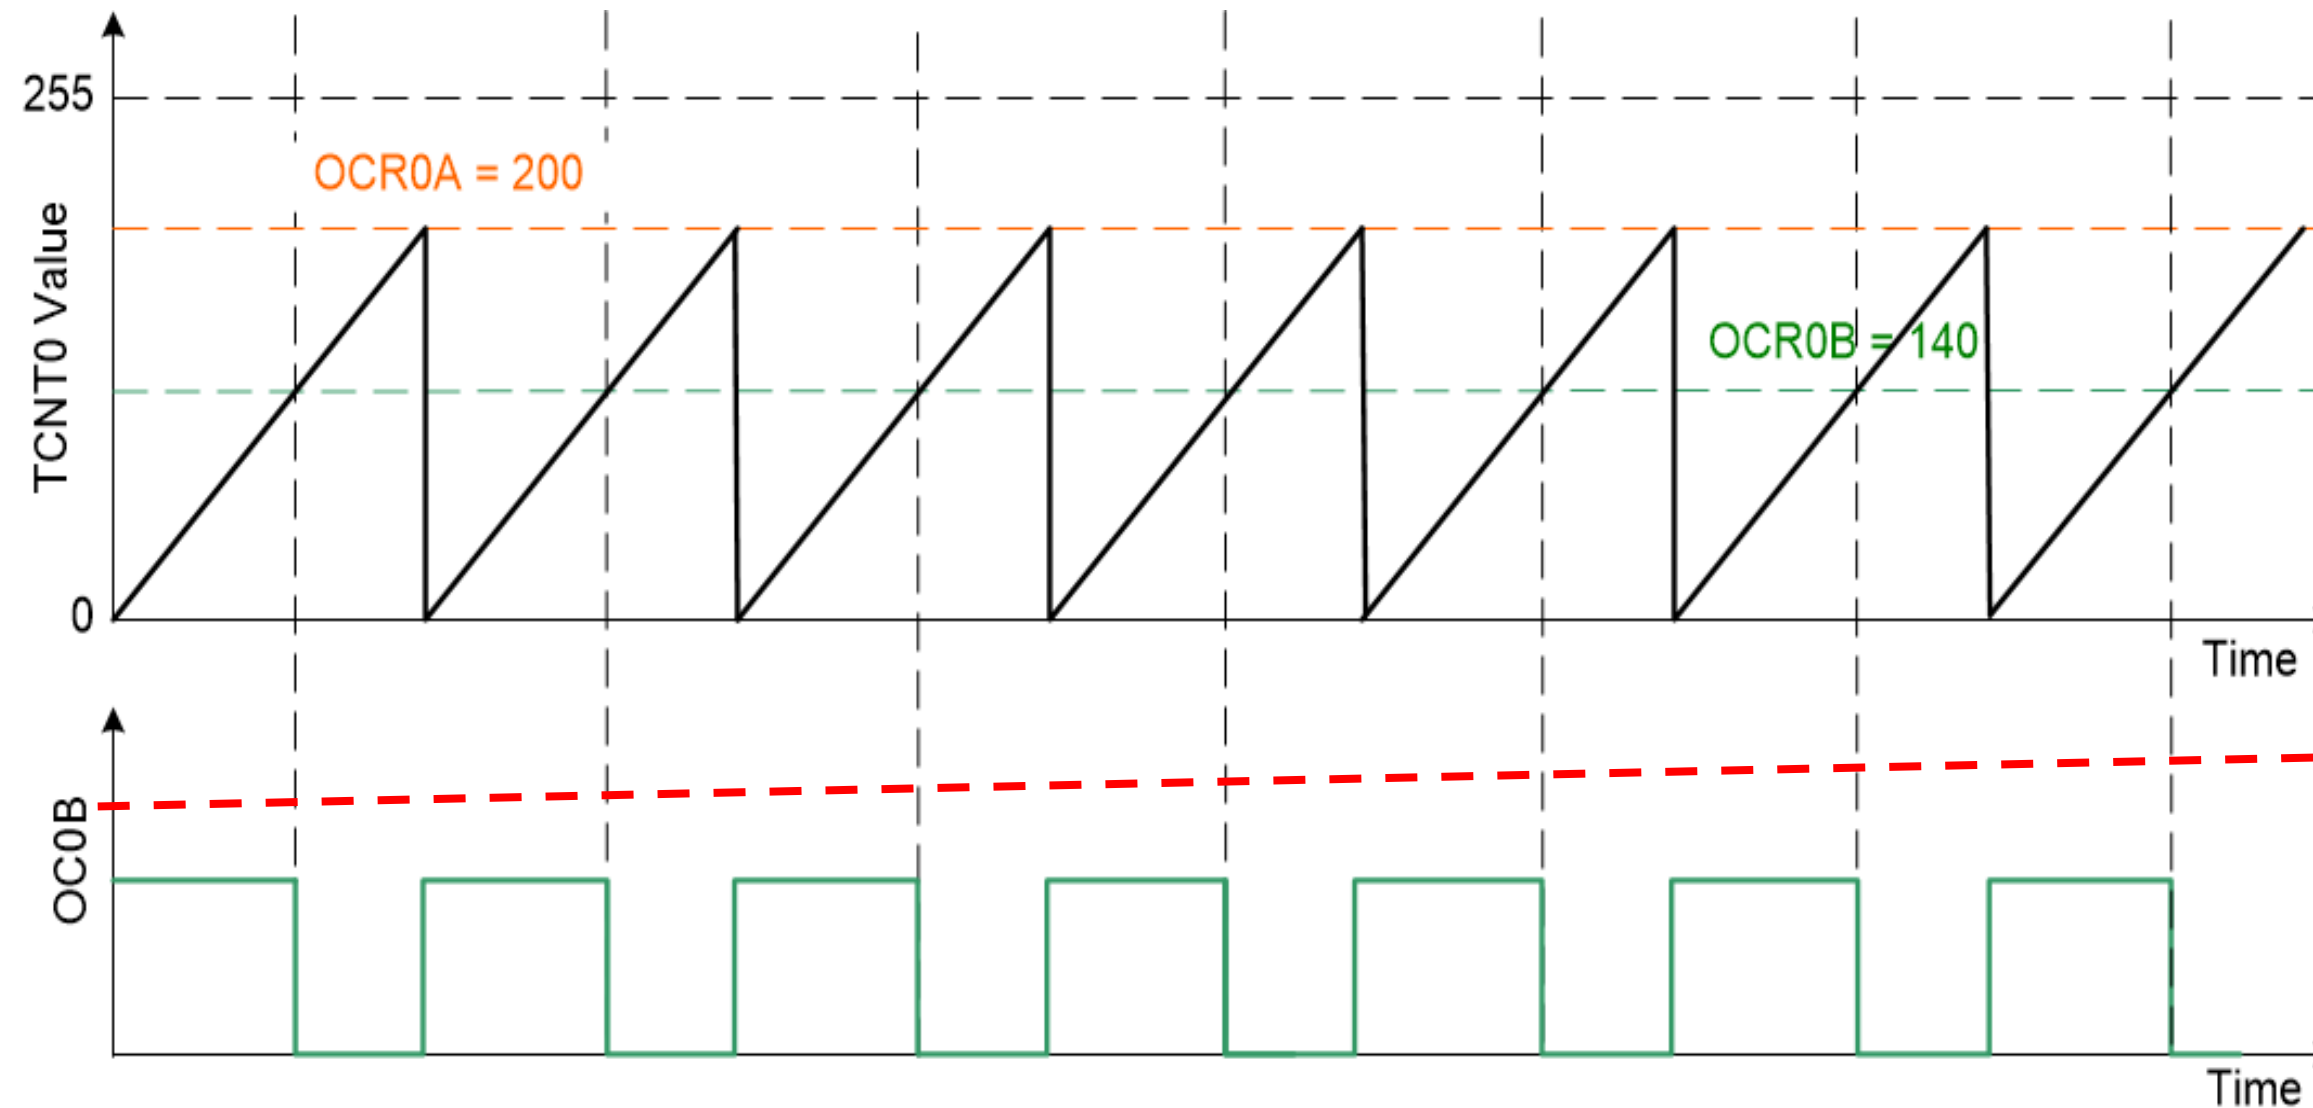

Timer/Counter
Input/Output
Pins

- 11 Timer 2 "A" output (OC2A)
- 10 Timer 1 "B" output (OC1B)
- 9 Timer 1 "A" output (OC1A)
- 5 Timer 1 input (T1)
- 6 Timer 0 "A" output (OC0A)
- 5 Timer 0 "B" output (OC0B)
- 4 Timer 0 input (T0)
- 3 Timer 2 "B" output (OC2B)

Programming Arduino for Phase-Correct PWM

```
#ifndef F_CPU
#define F_CPU 8000000UL // Clock frequency is 8 MHz
#endif
#include <avr/io.h>
```

```
int main() {
    // OCA pin is set as PWM output pin by sending a HIGH to Port D's Data Direction Register, DDRD
    DDRD |= (1<<PD6);
    OCR0A = 63; // Load 63 into OCR0A for setting its duty cycle to 75% (See previous example, slide # 24*)
    // Configure TCCR0A and TCCR0B register for (i) inverting (11), (ii) Phase-correct PWM mode 1 (001),
    // (iii) No Pre-scalar (001) for frequency control. By default, 0s are there, but you may set them explicitly.
    TCCR0A |= (1 << COM0A1) | (1 << COM0A0) | (1<<WGM00);
    TCCR0B |= (1<<CS00); // CS02:00 = 001, N = 1
    // TCCR0A=0b11000001; TCCR0B=0b00000001
    while(1);
    return 0;
}
```

* PWM signal is to have 75% duty cycle. Compute the value for OCR0A.

$$OCR0A = 255 - \frac{255 \times 75}{100} = 255 - 192 = 63, \text{ if } TOP = 0xFF$$

Bit	7	6	5	4	3	2	1	0	
0x24 (0x44)	COM0A1	COM0A0	COM0B1	COM0B0	-	-	WGM01	WGM00	TCCR0A
Read/Write	R/W	R/W	R/W	R/W	R	R	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	



Bit	7	6	5	4	3	2	1	0	
0x25 (0x45)	FOC0A	FOC0B	-	-	WGM02	CS02	CS01	CS00	TCCR0B
Read/Write	W	W	R	R	R/W	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

CS02	CS01	CS00	Description
0	0	0	No clock source (Timer/Counter stopped)
0	0	1	clk _{I/O} /(No prescaling)
0	1	0	clk _{I/O} /8 (From prescaler)
0	1	1	clk _{I/O} /64 (From prescaler)
1	0	0	clk _{I/O} /256 (From prescaler)
1	0	1	clk _{I/O} /1024 (From prescaler)
1	1	0	External clock source on T0 pin. Clock on falling edge.
1	1	1	External clock source on T0 pin. Clock on rising edge.

Programming Arduino for Phase-Correct PWM

The waveform generated will have a frequency of

$$f_{OC0APCPWM} = \frac{f_{clk_IO}}{N \times 510} = \frac{8 \times 10^6}{1 \times 510} \cong 15686.3 \text{ Hz} \cong 15.7 \text{ kHz.}$$

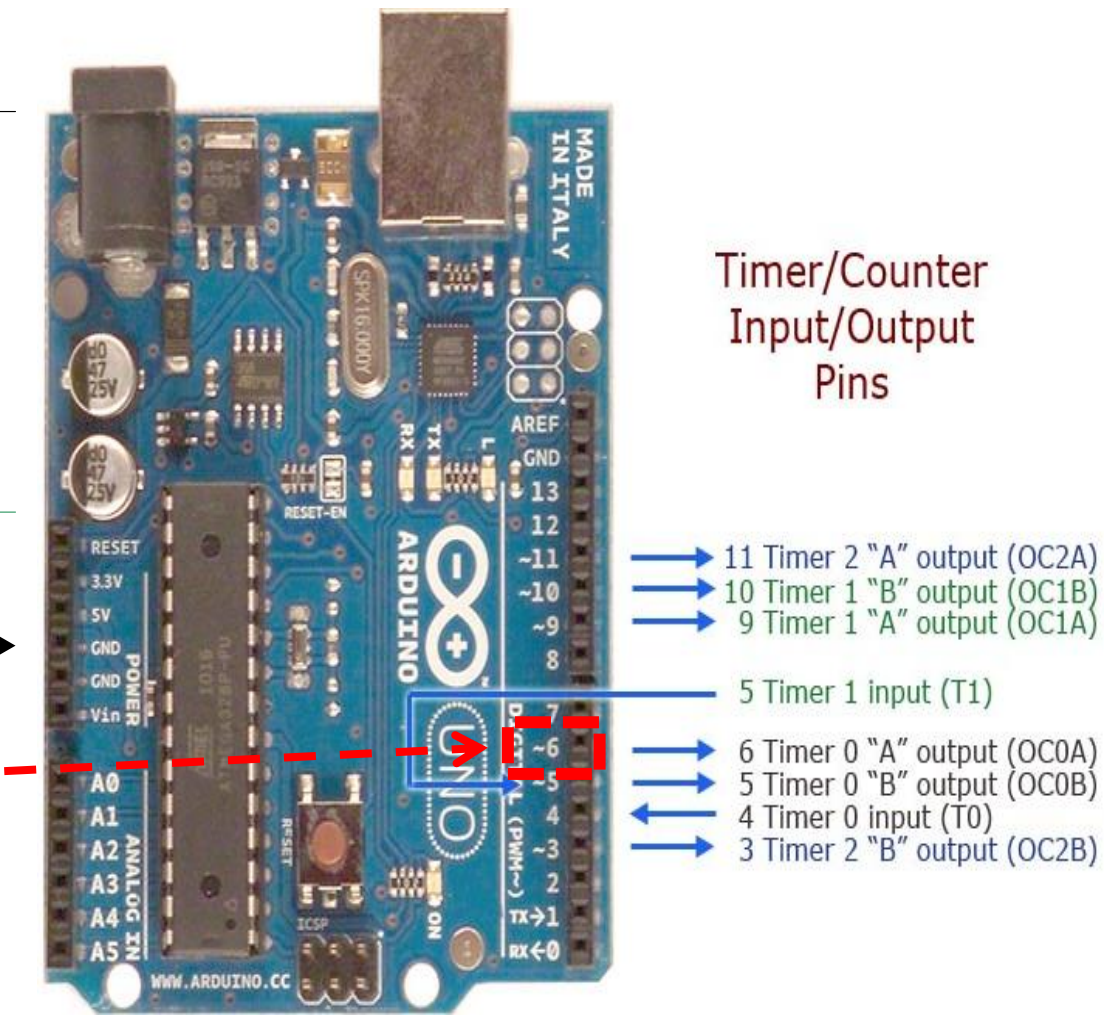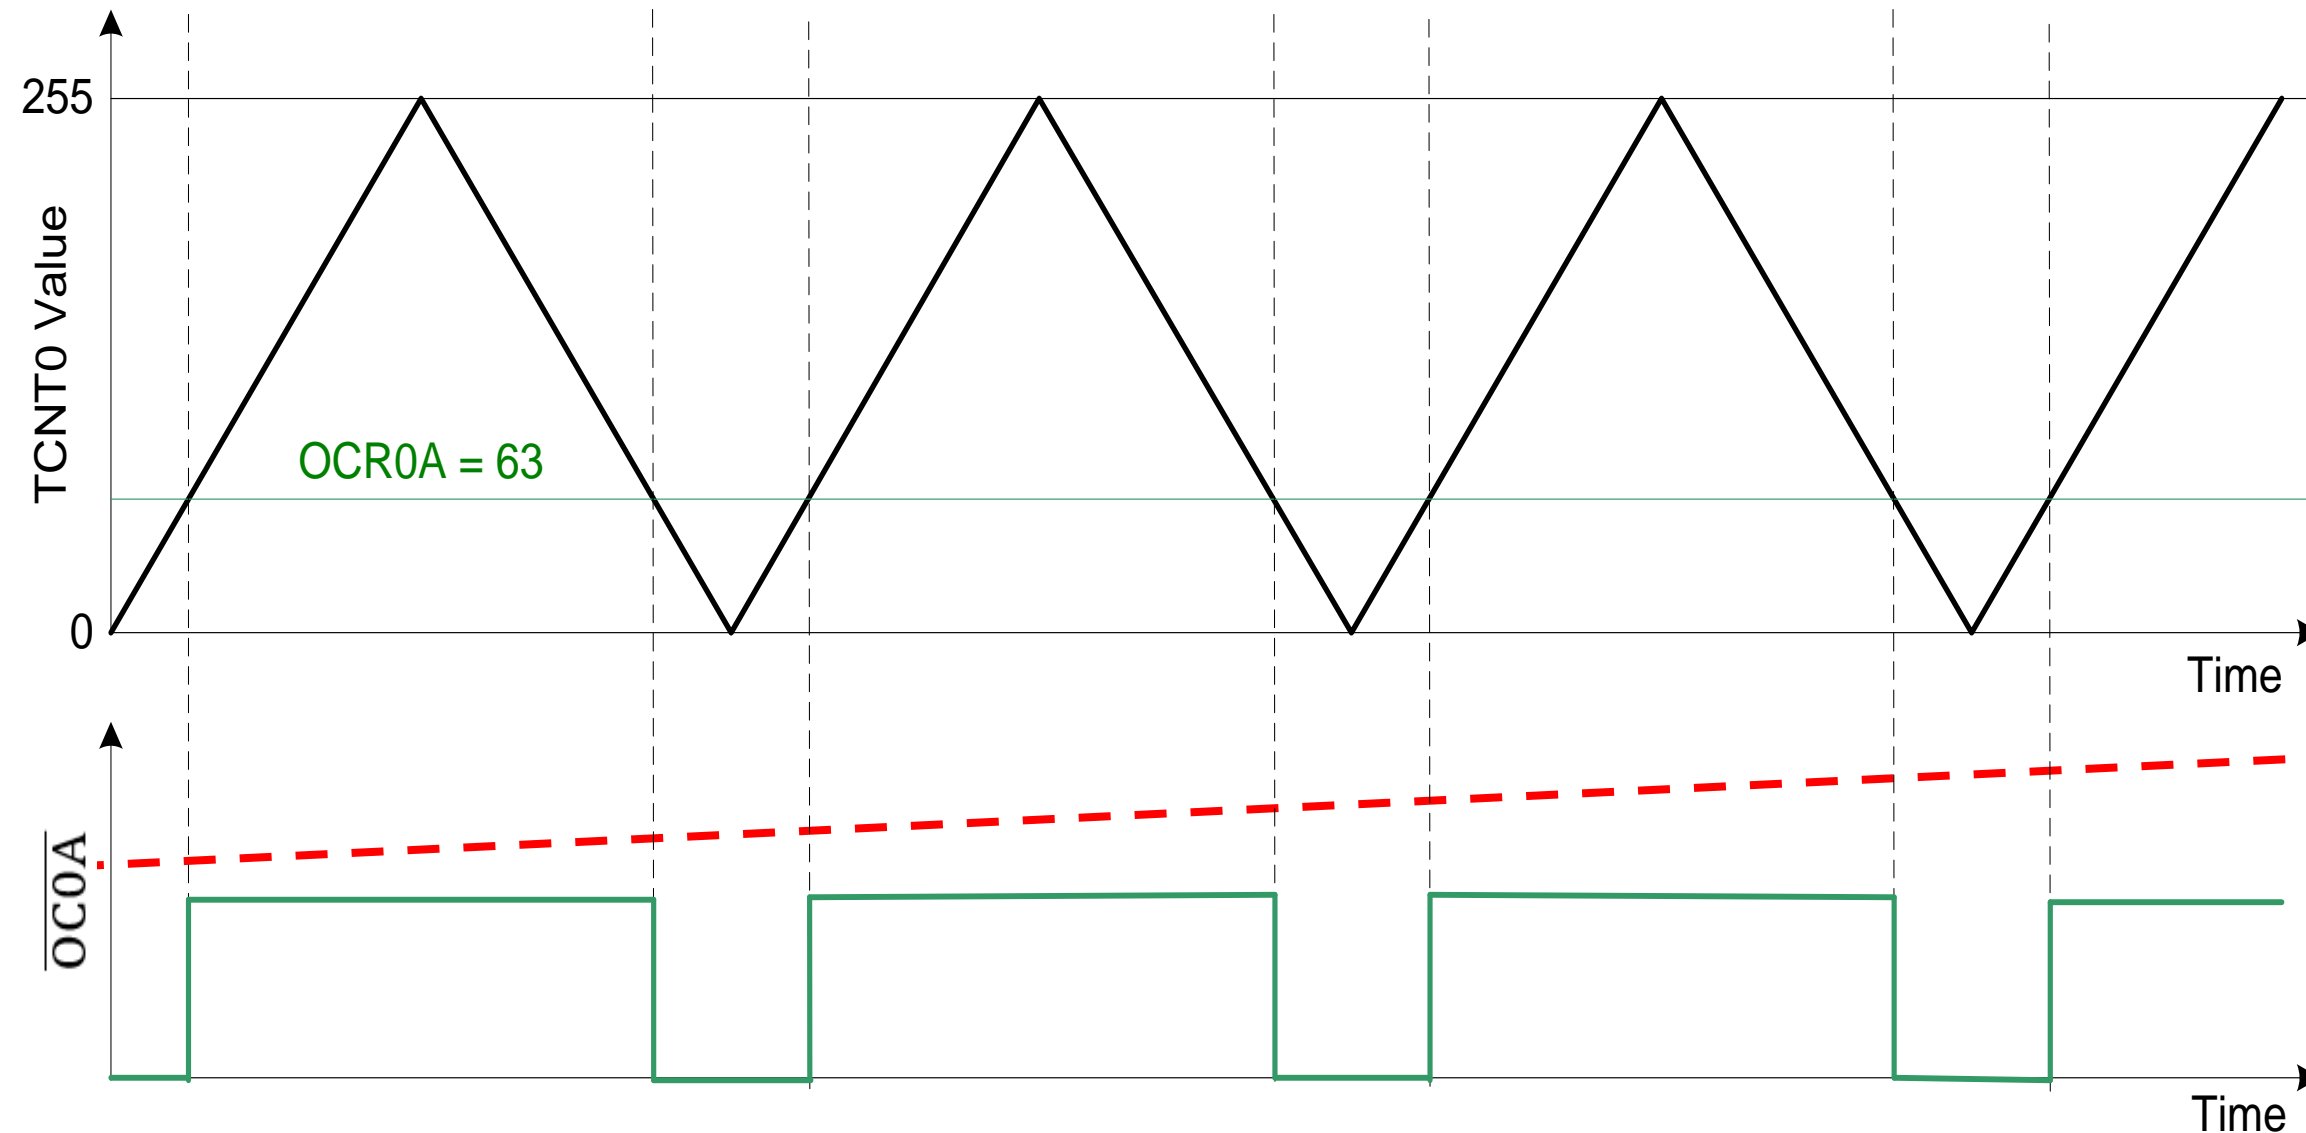

Programming Arduino for Phase-Correct PWM

```
#ifndef F_CPU
#define F_CPU 16000000UL // Clock frequency is 16 MHz
#endif
#include <avr/io.h>
```

```
int main() {
    // OCOB pin is set as PWM output pin by sending a HIGH to Port D's Data Direction Register, DDRD
    DDRD |= (1<<PD5);
    OCR0A = 200; // Load 200 into OCR0A as the TOP value in Phase-Correct PWM mode 5
    OCR0B = 63; // Load 63 into OCR0B for setting its duty cycle to 68.5% (See previous example, slide # 24*)
    // Configure TCCR0A and TCCR0B register for (i) inverting (11), (ii) Phase correct PWM mode 5 (101),
    // (iii) Pre-scalar (100) for frequency control.
    TCCR0A |= (1 << COM0B1) | (1 << COM0B0) | (1<<WGM00);
    TCCR0B |= (1<<WGM02) | (1<<CS02); // CS02:00 = 100, N = 256
    // TCCR0A=0b00110001; TCCR0B=0b00001100
    while(1);
    return 0;
}
```

* PWM signal is to have 87.3% duty cycle. Compute the value for OCR0B.

$$OCR0B = 200 - \frac{200 \times 68.5}{100} = 200 - 137 = 63, \text{ if } TOP = OCR0A = 200$$

Bit	7	6	5	4	3	2	1	0	
0x24 (0x44)	COM0A1	COM0A0	COM0B1	COM0B0	-	-	WGM01	WGM00	TCCR0A
Read/Write	R/W	R/W	R/W	R/W	R	R	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	



Bit	7	6	5	4	3	2	1	0	
0x25 (0x45)	FOC0A	FOC0B	-	-	WGM02	CS02	CS01	CS00	TCCR0B
Read/Write	W	W	R	R	R/W	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

CS02	CS01	CS00	Description
0	0	0	No clock source (Timer/Counter stopped)
0	0	1	clk _{I/O} /(No prescaling)
0	1	0	clk _{I/O} /8 (From prescaler)
0	1	1	clk _{I/O} /64 (From prescaler)
1	0	0	clk _{I/O} /256 (From prescaler)
1	0	1	clk _{I/O} /1024 (From prescaler)
1	1	0	External clock source on T0 pin. Clock on falling edge.
1	1	1	External clock source on T0 pin. Clock on rising edge.

Programming Arduino for Phase-Correct PWM

The waveform generated will have a frequency of

$$f_{OC0BFPWM} = \frac{f_{clk_{IO}}}{2 \times N \times OCR0A} = \frac{16 \times 10^6}{2 \times 256 \times 200} = 156.25 \text{ Hz.}$$

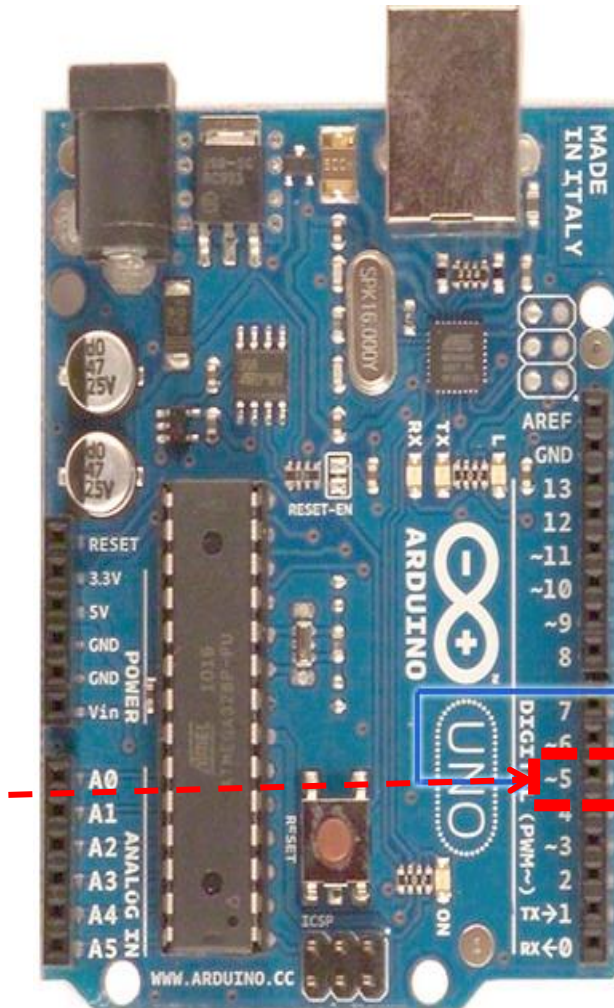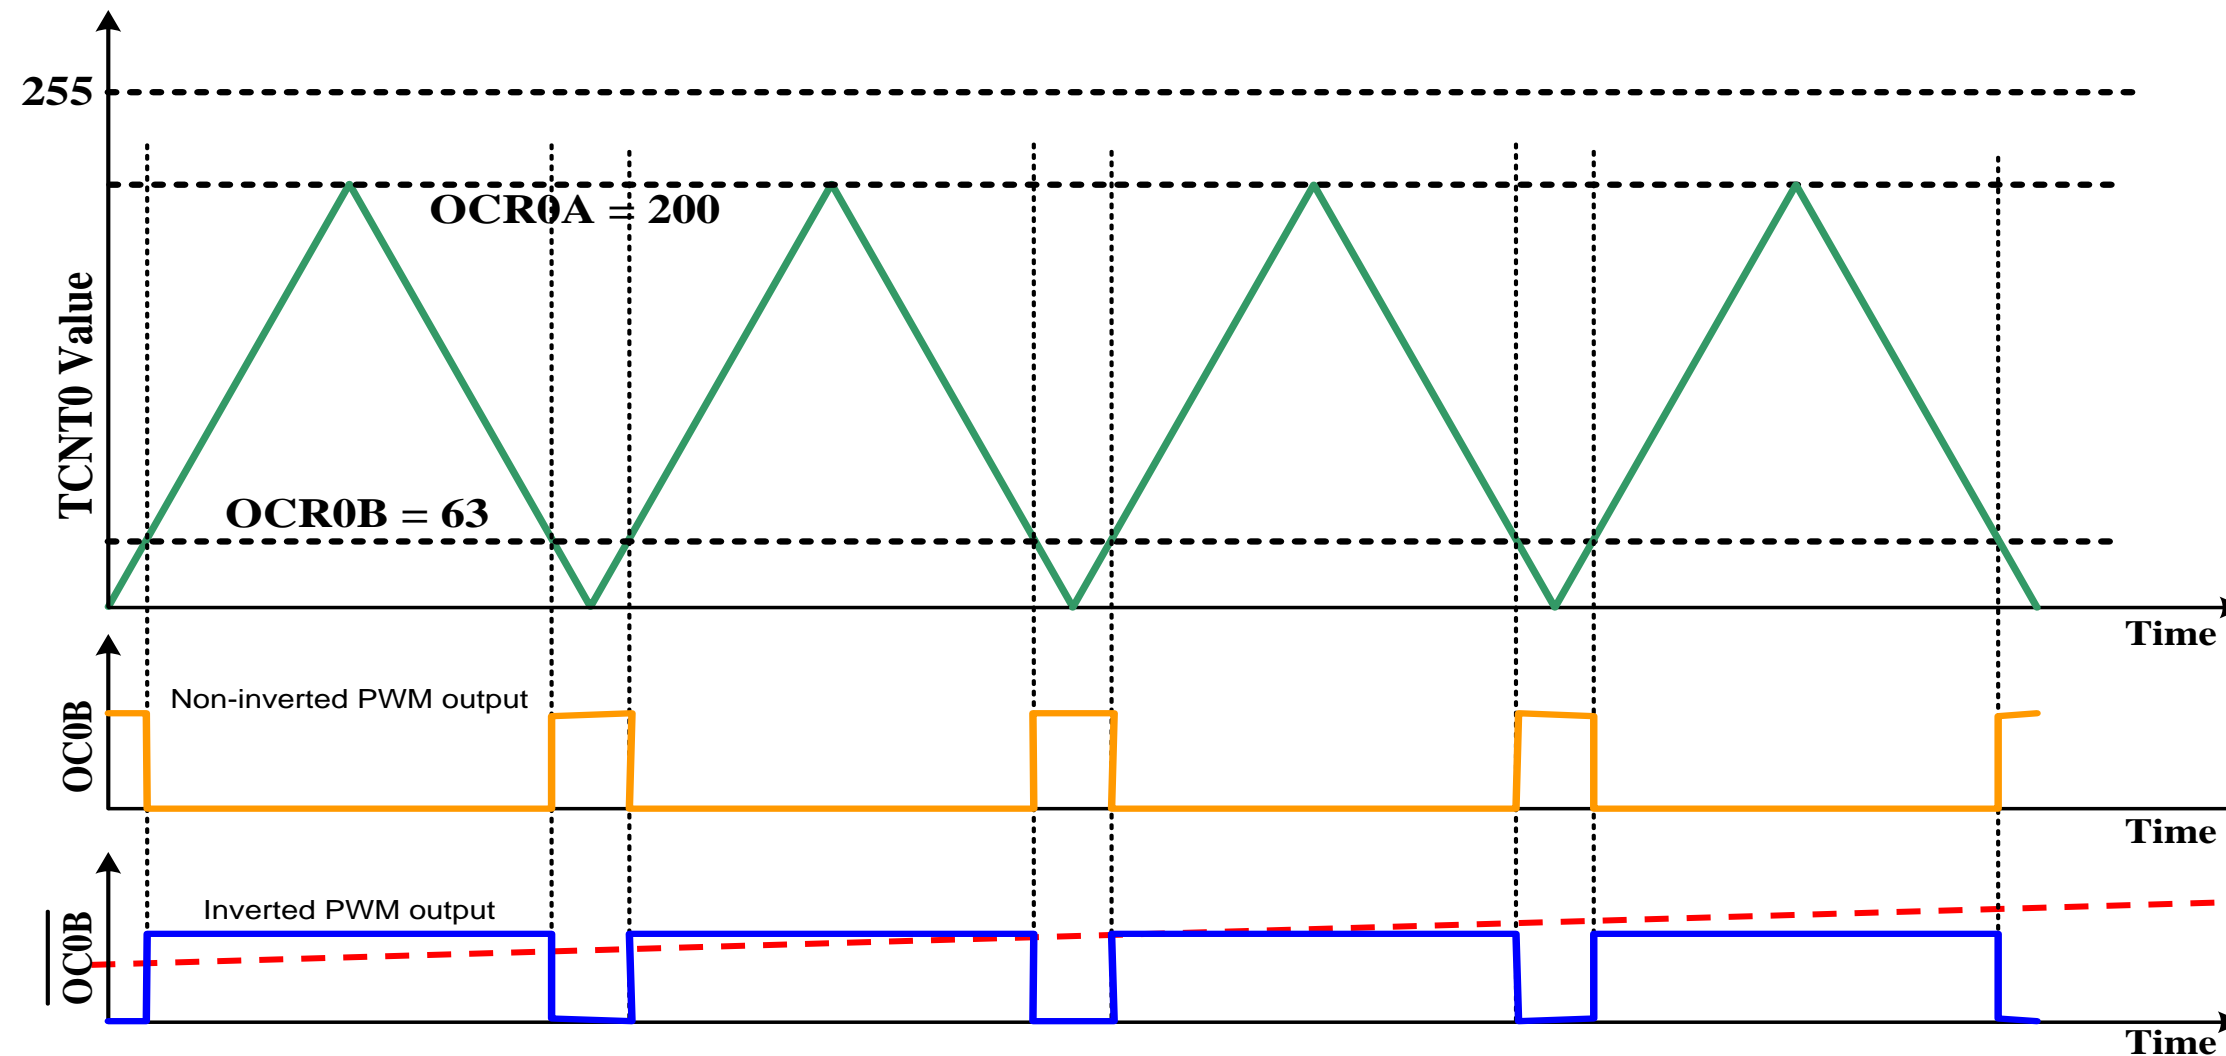

Timer/Counter
Input/Output
Pins

- 11 Timer 2 "A" output (OC2A)
- 10 Timer 1 "B" output (OC1B)
- 9 Timer 1 "A" output (OC1A)
- 5 Timer 1 input (T1)
- 6 Timer 0 "A" output (OC0A)
- 5 Timer 0 "B" output (OC0B)
- 4 Timer 0 input (T0)
- 3 Timer 2 "B" output (OC2B)

Thanks for attending....

