

Measurements and Simulations of Impedance Reduction Techniques in Particle Accelerators

A thesis submitted to the University of Manchester for the degree of
Doctor of Philosophy
in the Faculty of Engineering and Physical Sciences

2012

Hugo Alistair Day

School of Physics and Astronomy

Contents

| | |
|---|-----------|
| Abstract | 22 |
| Declaration | 24 |
| Copyright | 25 |
| The Author | 26 |
| Acknowledgements | 27 |
| 1 Introduction | 28 |
| 1.1 The CERN Accelerator Complex | 28 |
| 1.2 The LHC | 28 |
| 1.3 Operational Figure of Merit - Luminosity | 30 |
| 1.3.1 Integrated Luminosity | 31 |
| 1.4 Beam Dynamics | 32 |
| 1.4.1 Linear Transverse Dynamics | 34 |
| 2 Wakefields and Impedance | 39 |
| 2.1 Wakefields | 39 |
| 2.1.1 The Electromagnetic Fields of a Moving Charged Particle in Free Space | 40 |
| 2.1.2 Wakefields of a Bunch | 42 |
| 2.1.3 Transverse Wakefields | 42 |

| | | |
|----------|---|------------|
| 2.1.4 | Panowsky-Wenzel Theorem | 43 |
| 2.2 | Impedances | 44 |
| 2.2.1 | Beam Coupling Impedance | 45 |
| 2.2.2 | Transverse Impedances | 45 |
| 2.2.3 | Geometric Impedance | 46 |
| 2.2.4 | Resistive Wall Impedance | 49 |
| 2.3 | Example of the Effects of Wakefields | 51 |
| 2.3.1 | Beam Induced Heating | 52 |
| 2.3.2 | Beam Instabilities | 64 |
| 3 | Beam Based Measurements of Beam Coupling Impedance | 70 |
| 3.1 | Longitudinal Beam Impedance Measurements | 70 |
| 3.1.1 | Potential Well Distortion with Bunch Intensity | 70 |
| 3.1.2 | Synchronous Phase Shift | 72 |
| 3.2 | Transverse Beam Impedance Measurements | 73 |
| 3.2.1 | Tune shift change with bunch intensity | 74 |
| 3.2.2 | Growth time change with chromaticity | 74 |
| 4 | Bench Top Measurements of Beam Coupling Impedance | 75 |
| 4.1 | Low Q-factor Impedances | 75 |
| 4.1.1 | Classical Coaxial Wire Method | 76 |
| 4.1.2 | Resonator Coaxial Wire Method | 79 |
| 4.1.3 | Transverse Impedance Measurements | 82 |
| 4.1.4 | Measurements on Example Geometries | 89 |
| 4.2 | High Q-factor Impedances | 103 |
| 5 | Computational Simulations of Beam Coupling Impedance | 105 |
| 5.1 | Time Domain Simulations | 106 |
| 5.1.1 | Direct Simulation of a Particle Beam | 106 |
| 5.2 | Frequency Domain Simulations | 107 |

| | | |
|----------|---|------------|
| 5.2.1 | Eigenmode Simulations | 107 |
| 5.2.2 | The Coaxial Wire Method by Simulation | 108 |
| 5.2.3 | Simulation of the particle beam | 108 |
| 6 | Beam Coupling Impedance Reduction Techniques | 109 |
| 6.1 | Tapering of Step Transitions | 110 |
| 6.2 | Transition Pieces | 110 |
| 6.3 | Conductive Coatings | 112 |
| 6.4 | Beam screens in kicker magnets | 113 |
| 6.5 | Seriagraphy on Kicker Magnets | 114 |
| 6.6 | Use of damping materials to de-Q resonant cavities | 115 |
| 6.6.1 | Heat Loads on the Damping Material | 118 |
| 7 | LHC Collimation Upgrades | 127 |
| 7.1 | Introduction | 127 |
| 7.2 | LHC Phase 2 Secondary Collimator Jaw Material | 131 |
| 7.2.1 | Impedance Studies and Analysis | 132 |
| 7.3 | TCTP Impedance Studies | 135 |
| 7.3.1 | TCTP Collimator - Design and Geometry | 136 |
| 7.3.2 | Impedance Simulations and Results | 138 |
| 7.3.3 | Beam-Induced Heating | 140 |
| 8 | LHC Injection Kicker Magnet | 148 |
| 8.1 | LHC Injection Kicker Magnets | 149 |
| 8.1.1 | Development of the LHC-MKI Beam Screen | 151 |
| 8.1.2 | Observations of heating during 2011 and 2012 until Technical Stop 3 | 152 |
| 8.2 | Simulations and Measurements of the MKI with 15 Screen Conductors | 154 |
| 8.2.1 | Beam Induced Heating Estimates for 15 Screen Conductors | 159 |
| 8.3 | Other Concerns for the MKI Operation and Temperature Reduction | 161 |

| | | |
|---------------------|--|------------|
| 8.4 | Simulations and Measurements of the MKI with 19 Screen Conductors | 162 |
| 8.4.1 | Temperature of MKI8d after Technical Stop 3 | 166 |
| 8.5 | The Dependence of the Beam Coupling Impedance on The Kicker Components | 167 |
| 8.5.1 | The Impedance of the MKI - Effects of the Inclusion of the Beam Screen | 167 |
| 8.5.2 | How Screening Changes with the Number of Screen Conductors | 169 |
| 8.5.3 | Dependence of the Impedance on the Beam Screen Dimensions | 172 |
| 8.6 | New Beam Screen Designs | 175 |
| 8.7 | Upgrade Plans for Long Shutdown 1 and Beyond | 181 |
| 9 | Conclusions | 185 |
| Bibliography | | 187 |
| A | TCTP Eigenmode Simulations - No Ferrite | 198 |
| B | TCTP Eigenmode Simulations - With Ferrite | 204 |

Total word count: 27794

List of Tables

| | | |
|-----|--|-----|
| 6.1 | Comparison of the power loss on the surface of a pillbox cavity by both direct calculation and internal calculation by HFSS (In units normalised to 1V/m maximum electric field) | 121 |
| 6.2 | Comparison of the power loss in the volume of a pillbox cavity by both direct calculation and internal calculation by HFSS (In units normalised to 1V/m maximum electric field) | 121 |
| 7.1 | The electrical conductivity of the different jaw materials proposed for use in the phase 2 design. All results are given for measurements at room temperature (20°C) | 132 |
| 7.2 | The impedance budgets (both transverse and longitudinal) for LHC at injection and collisions. Taken from the LHC Design Report [1] | 137 |
| 7.3 | The LHC operational parameters considered for heating estimates for the TCTP. Operational parameters include the nominal LHC parameters for 25ns bunch spacing, the peak operational intensity for 50ns bunch spacing used in 2012, and the two possible HL-LHC operational schemes, using both 25ns and 50ns bunch spacing. Here the bunch length is assumed to encompass the 4σ gaussian width. | 143 |
| 7.4 | The power loss of a the TCTP collimator with ferrite for a number of operational modes in the LHC and HL-LHC assuming each cavity mode falls upon a beam harmonic. All losses are in watts using the parameters found in Tab. 7.3 | 143 |

| | | |
|-----|--|-----|
| 7.5 | The power loss of a TCTP collimator without the ferrite damping tiles for a number of operational modes in the LHC and HL-LHC assuming each cavity mode falls upon a beam harmonic. All losses are in watts using the parameters found in Tab. 7.3 | 144 |
| 7.6 | The power loss of a TCTP collimator with ferrite for a number of operational modes in the LHC and HL-LHC assuming beam harmonics spaced at the reciprocal of the bunch spacing. All losses are in watts using the parameters found in Tab. 7.3 | 144 |
| 7.7 | The power loss of a TCTP collimator without ferrite for a number of operational modes in the LHC and HL-LHC assuming beam harmonics spaced at the reciprocal of the bunch spacing. All losses are in watts using the parameters found in Tab. 7.3 | 145 |
| 7.8 | The percentage of power loss lost in thermally sensitive components in the TCTP. | 146 |
| 7.9 | The power loss in the ferrite of the TCTP collimator. The most pessimistic of the losses estimated in Tab. 7.3.3 and Tab. 7.3.3 for the 1.0ns case. All losses are in watts using the parameters found in Tab. 7.3 | 146 |
| 8.1 | MKI Operational parameters | 149 |
| 8.2 | The 2012 LHC operational parameters used for estimating the power loss in the MKI with 15 screen conductors. | 160 |
| 8.3 | Power loss estimates for the LHC-MKI with 15 screen conductors in the beam screen. | 160 |

| | | |
|-----|--|-----|
| 8.4 | The power loss due to the impedance calculated for the MKI with 15 (most common configuration) and 19 (as for MKI8d) screen conductors. Estimates are given assuming a beam with 1380 bunches, separated by 50ns, with each bunch containing 1.7×10^{11} particles. Estimates of the power loss assuming a gaussian, a parabolic and a \cos^2 longitudinal bunch profile are calculated, and a range given for the lowest (typically the gaus- sian distribution) and highest (typically the \cos^2 distribution due to the large high frequency lobes) values calculated. | 164 |
| 8.5 | The beam induced heating calculated for a number of beam screen de- signs with 24 screen conductors of equal length (overlap of 100mm) with different tube thicknesses assuming 50ns bunch spacing LHC conditions (1380 bunches, 1.7×10^{11} ppb with a bunch length of 1ns). It can be seen that the broadband heating component is relatively small for the limited change in the tube thickness, whilst the resonant component can increase drastically due to the increasing peak impedance. | 176 |
| 8.6 | The power loss expected due to beam-wakefield interactions in the MKIs for a number of proposed beam screen designs. Estimates are given for 50ns and 25ns bunch spacing in the LHC (1380 bunches, 1.7×10^{11} par- ticles per bunch for 50ns, 2808 bunches, 1.15×10^{11} particles per bunch for 25ns) assuming a \cos^2 bunch distribution. | 183 |

List of Figures

| | | |
|-----|--|----|
| 1.1 | The CERN accelerator complex, showing both the proton and heavy ion (lead) accelerator chains from LINACs 2 and 3 up to the LHC. Different experimental uses are highlighted in the diagram. | 29 |
| 1.2 | The representation of the coordinate system of a circular accelerator, and additionally the co-moving reference frame of a circulating particle. . . . | 33 |
| 1.3 | An illustration of betatron oscillations around the ideal orbit of a circular accelerator. These oscillation occur in both the horizontal and vertical planes. | 33 |
| 2.1 | The relative displacements and velocities of the source and test particles. . | 40 |
| 2.2 | The relative displacements of the source and witness particle in the horizontal and vertical planes that identify the dipolar/driving and quadrupolar/detuning impedances. | 46 |
| 2.3 | Cross section of a cylindrical pillbox cavity with an attached beam pipe . | 47 |
| 2.4 | The equivalent RLC parallel circuit for a cavity resonance, driven by a current i_b , in this case the beam current | 48 |
| 2.5 | The geometry of the classical thick wall formula. | 50 |
| 2.6 | Examples of the longitudinal 2.6(a) and transverse 2.6(b) resistive wall impedance of a beam pipe of radius $a = 2\text{cm}$ made of both copper ($\sigma = 1 \times 10^7 \text{Sm}^{-1}$) and graphite ($\sigma = 7 \times 10^4 \text{Sm}^{-1}$). | 51 |

| | | |
|------|---|----|
| 2.7 | A comparison of 2.7(a) a measured beam power spectrum and a gaussian bunch of the same bunch length in the frequency domain and 2.7(b) the resulting time domain beam profile. The gaussian has a bunch length ($4\sigma_z = 1.2\text{ns}$). Measured spectrum taken by P. Baudrengien et al [2] | 54 |
| 2.8 | The longitudinal bunch profile of a number of bunch distributions. Note that all of these are normalised to have a peak bunch current of 1. For the gaussian distribution the bunch length is the 4σ value. The bunch length $\tau_b = 1.2\text{ns}$ | 55 |
| 2.9 | The frequency domain 2.9(a) current spectrum and 2.9(b) power spectrum for a number of different bunch profiles with a bunch length $\tau_b = 1.2\text{ns}$ | 55 |
| 2.10 | 2.10(a) The longitudinal profile and the 2.10(b) associated bunch power spectrum for a number of bunch lengths assuming a gaussian bunch profile. | 56 |
| 2.11 | 2.11(a) The longitudinal profile and the 2.11(b) associated bunch power spectrum for a number of bunch lengths assuming a parabolic bunch profile. | 56 |
| 2.12 | A comparison of a measured beam power spectrum and a number of analytical bunch profiles assuming a bunch length of 1.2ns. | 57 |
| 2.13 | The beam harmonics of a beam with a bunch spacing of 25ns overlayed on the real component of the longitudinal impedance an example of a low Q impedance ($R_s = 10\omega$, $Q = 10$, $f_{res} = 1\text{GHz}$). The blue lines represent the frequency of a beam harmonic, not necessarily the magnitude of the power spectrum at that point. Note that a number of beam harmonics overlay non-zero impedance values. | 58 |
| 2.14 | The beam harmonics of a beam with a bunch spacing of 25ns overlayed on the real component of the longitudinal impedance an example of a high Q impedance ($R_s = 10\omega$, $Q = 1000$, $f_{res} = 1\text{GHz}$). The blue lines represent the frequency of a beam harmonic, not necessarily the magnitude of the power spectrum at that point. Note that only a single beam harmonic overlays a non-zero impedance values. | 59 |

| | |
|--|----|
| 2.15 The change in power loss due to a narrow band resonance characterised by $\omega_0 = 2GHz$, $R_s = 100\Omega$, $Q = 1000$ with a gaussian bunch distribution of different lengths. | 61 |
| 2.16 2.16(a) The change in power loss due to a narrow band resonance characterised by $\omega_0 = 2GHz$, $R_s = 100\Omega$, $Q = 1000$ interacting with a \cos^2 bunch distribution with different bunch lengths. The impedance and the beam power spectrum are shown in 2.16(b) to illustrate how this relates to the power loss. | 62 |
| 2.17 2.17(a) The change in power loss due to a narrow band resonance characterised by $\omega_0 = 2GHz$, $R_s = 100\Omega$, $Q = 1$ interacting with a \cos^2 bunch distribution with different bunch lengths. The impedance and the beam power spectrum are shown in 2.17(b) to illustrate how this relates to the power loss. | 63 |
| 2.18 A tune diagram illustrating the unperturbed tune of a machine, and the resulting perturbed tune and the tune spread as a result of an impedance source. Note that the tune spread has caused some particles to lie upon a major resonance harmonic. Taken from K. Schindl [3]. | 66 |
| 2.19 The change in the bunch length of a proton beam in an SPS like machine due to the effects of a broadband resonator impedance ($f_{res} = 1GHz$, $R_s = 10\Omega$, $Q = 1$). Note that the bunch length increases when the beam is above transition, and decreases below transition, as the bunch intensity is increased. | 67 |
| 2.20 Examples of a number of modes of headtail oscillations without 2.20(a) and with 2.20(b) chromaticity. Note that radial and azimuthal modes may occur, as may coupled modes in which the motion of the horizontal and vertical planes is coupled. Images courtesy of G. Rumolo [4]. | 69 |
| 4.1 Comparison of the electromagnetic field profile of a moving charged particle and a short time pulse propagating along a coaxial wire. | 76 |

| | | |
|------|---|----|
| 4.2 | Experimental setup for a measurement of the beam coupling impedance using the classical coaxial wire method | 77 |
| 4.3 | An example of a reflection measurement made with and without a matching resistor. The faded line is the measurement with matching, the bold line that without. The reduction in the reflection can be seen due to the flatter line after the initial reflection. | 78 |
| 4.4 | An example of the resonance pattern seen whilst performing measurements using the resonant method. Each peak corresponds to one data point in the final measurements. Taken from measurements of the LHC injection kicker magnets | 81 |
| 4.5 | Measurement setup for measurements of the dipolar beam coupling impedance using the two wire setup for the classical coaxial wire method. | 84 |
| 4.6 | The geometries used for coaxial wire measurement simulations. For the geometry with top/bottom, left/right symmetry we use the Tsutsui model (4.6(a)) using two parallel plates. For the asymmetric structure we use the Zannini-model for a c-core ferrite kicker magnet (4.6(b)), which generates a constant term and a noticeable asymmetric term. | 92 |
| 4.7 | The complex permeability of 4A4 ferrite. | 92 |
| 4.8 | An example of the simulation model used for coaxial wire simulations. In this case a displaced single wire between two ferrite plates. The wire is highlighted in purple. | 93 |
| 4.9 | The longitudinal impedance of two parallel ferrite plates simulated using a longitudinal coaxial wire. Presented are is the impedance as measured in the horizontal plane (4.9(a)) and in the vertical plane 4.9(b). | 94 |
| 4.10 | The dipolar impedance of two parallel ferrite plates simulated using two longitudinal coaxial wires. Presented are is the impedance as measured in the horizontal plane (4.10(a)) and in the vertical plane 4.10(b). | 94 |

| | |
|--|-----|
| 4.11 The quadrupolar impedance of two parallel ferrite plates simulated using a combination of displaced single wire simulated measurements and two wire simulated mesurements. Presented are is the impedance as measured in the horizontal plane (4.11(a)) and in the vertical plane 4.11(b). | 95 |
| 4.12 The longitudinal impedance of two parallel graphite plates as measured by taking the constant term of a quadratic equation fitted to a series of displaced single wire measurements. Shown are measurements acquired from fitting displacements in 4.12(a) horizontal axis and in 4.12(b) the vertical axis. | 98 |
| 4.13 The dipolar impedance of two parallel graphite plates measured using two longitudinal coaxial wires. Presented is the impedance as measured in the horizontal plane (4.13(a)) and in the vertical plane 4.13(b). | 99 |
| 4.14 The quadrupolar impedance of two parallel graphite plates measured using a combination of displaced single wire measurements and two wire mesurements. Presented is the impedance as measured in the horizontal plane (4.14(a)) and in the vertical plane 4.14(b). | 99 |
| 4.15 The impedance of the c-core ferrite kicker as acquired by simulating the classical coaxial wire method in HFSS. Shown is the 4.15(a) longitudinal impedance, 4.15(b) the dipolar impedance, 4.15(c) the quadrupolar impedance and 4.15(d) the constant transverse impedance. | 102 |
| 4.16 Comparison of the geometries of a cavity and attached beampipes 4.16(a) without and 4.16(b) with the coaxial wire in place. Note the dimensions and that the dashed line in 4.16(a) represents the rotational plane of symmetry | 104 |
| 4.17 A comparison of the transmission parameters through a pillbox cavity with and without a coaxial wire. A displaced coaxial wire is also shown to illustrate the possibility of exciting dipolar modes also. It can be seen that the transmission signals are drastically changed depending on the presence or not of the wire. | 104 |

| | | |
|-----|---|-----|
| 5.1 | An illustration of the 5.1(a) source signal and witness integration in a time domain code. Here a sample from the UA9 goniometer is shown. The source signal and the resulting wakefield are shown in 5.1(b). | 107 |
| 6.1 | An example pillbox structure with and without a tapered transition region 6.1(a), in this case with the taper at 15° . The resulting imaginary component of the longitudinal impedances are shown in 6.1(b), as these are the most significant for beam stability. | 111 |
| 6.2 | Example of RF fingers (in this case for the PIMS module, placed between cryo-modules in the LHC). | 111 |
| 6.3 | The layout of the RF fingers in the VMTSA both in 6.3(a) the fully operational configuration and 6.3(b) when the RF fingers lose contact. 6.3(c) shows the resulting beam coupling impedance of the two types of impedance as acquired by coaxial wire measurements. Photos and measurements courtesy of J.L. Nougaret. | 112 |
| 6.4 | An example of seriography in the SPS Extraction Kicker Magnets (SPS-MKE). The layout of the interleaved fingers is shown in 6.4(a) and the actual seriographed ferrites in 6.4(b). A comparison of the longitudinal beam coupling impedance with and without the seriography is shown in 6.4(c). | 116 |
| 6.5 | The complex permeability of a sample ferrite of the sort used for damping. In this case 8C11. In use a high T_c ferrite is recommended, such as TT2-111R. | 117 |
| 6.6 | Two sample geometries used to examine the effects of ferrite damping material on cavity resonances. 6.6(a) shows a cavity with the ferrite unshielded, and 6.6(b) shows a more realistic case in which the ferrite is shielded from directly seeing the traversing beam. | 119 |

| | | |
|------|--|-----|
| 6.7 | The real component of the longitudinal beam coupling impedance of a cavity without and with a damping material with $\epsilon' = 10$, $\mu' = 10$ and μ'/μ' is varied. The non-damped cavity is shown for comparison. The change in resonance frequency and shunt impedance impedance is due to the increased ϵ' of the damping material. | 122 |
| 6.8 | 6.8(a) The reduction in the Q of the cavity resonance with the increasing loss tangent of the ferrite damping, showing a strong decrease of the resonant Q with a small increase in loss tangent. 6.8(b) The percentage of the power loss in the ferrite as the resonant Q decreases. this can be seen to tend towards 100% as the Q approaches 0. | 123 |
| 6.9 | The power loss due to a beam with 1.15×10^{11} particles per bunch, 288 bunches, a ring circumference 6911m and a bunch length $4\sigma = 0.04m$ assuming a gaussian bunch distribution in the unscreened cavity. | 123 |
| 6.10 | The real component of the longitudinal beam coupling impedance of a cavity without and with shielded damping material with $\epsilon' = 10$, $\mu' = 10$ and μ'/μ' is varied. The non-damped cavity is shown for comparison. The change in resonance frequency and shunt impedance impedance is due to the increased ϵ' of the damping material. | 124 |
| 6.11 | 6.11(a) The reduction in the Q of the cavity resonance with the increasing loss tangent of the ferrite damping, showing a strong decrease of the resonant Q with a small increase in loss tangent. 6.11(b) The percentage of the power loss in the ferrite as the resonant Q decreases. this can be seen to tend towards 100% as the Q approaches 0. | 125 |
| 6.12 | The power loss due to a beam with 1.15×10^{11} particles per bunch, 288 bunches, a ring circumference 6911m and a bunch length $4\sigma = 0.04m$ assuming a gaussian bunch distribution in the screened cavity. | 125 |

| | | |
|-----|--|-----|
| 7.1 | Different components of impedance reduction measures in the phase 1 collimator design. 7.1(a) shows the longitudinal RF fingers, ensuring a good conducting path for the beam image currents, and 7.1(b) shows the sliding RF contacts on the collimators jaw. These are intended to minimise the volume seen by the beam, thus minimising any cavity modes that may be excited by the beam at very high frequencies where the beam power spectrum is very small. Images courtesy of A. Bertarelli, CERN. . . | 129 |
| 7.2 | The RF system for use in the phase 2 collimation system. The sliding RF contacts of the phase 1 design are replaced with a ferrite damping system. The RF contacts are removed, allowing the beam to see the entire RF cavity, causing resonances at lower frequencies. The Q of these resonances are decreased by the use of ferrite damping tiles (see Sec. 6.6). | 130 |
| 7.3 | A number of the proposed jaw designs for the phase 2 secondary collimators. 7.3(a) shows the jaw made entirely from molybdenum. Glidcop maybe substituted for molybdenum in this design. 7.3(b) shows the jaw made from a mixture of molybdenum diamond composite with a 2mm coating of pure molybdenum on the surface. The composite ensure a mechanically strong jaw, whilst the coating screens the higher resistivity composite and provides a smooth surface on the beam-facing part of the jaw. In this case the composite maybe substituted with copper diamond composite, and likewise the coating may be replaced with GlidCop. . . . | 133 |
| 7.4 | The physical model of the Mounet model of parallel plate impedance. Note that the two sides of the structure do not have to be symmetric. The materials maybe any material provided it's frequency dependent properties are well defined. | 133 |
| 7.5 | The impedances of different jaw materials for the phase 2 secondary collimators. 7.5(a) The longitudinal impedance, 7.5(b) the horizontal dipolar impedance, 7.5(c), the vertical dipolar impedance, 7.5(d) the horizontal quadrupolar impedance and 7.5(e) the vertical quadrupolar impedance. . . | 134 |

| | | |
|------|--|-----|
| 7.6 | The real component of the vertical dipolar impedance of the various colimator jaw materials assuming a 2mm half gap. | 135 |
| 7.7 | The TCTP collimator has a number of important impedance reduction techniques present in its design. The RF system, 7.7(a), replaces the sliding RF contacts of the phase 1 design, using ferrite tiles (shown in black) to reduce the resonant Q of the structure. The longitudinal RF fingers, shown in 7.7(b), provide a good conducting path for the beam image current in the transition from the beam pipe to the collimator jaw. | 137 |
| 7.8 | The different RF systems considered for the TCTP collimator. 7.8(a) shows an RF system similar to the phase 1 RF system. In these simulations the sliding RF contacts are replaced by a perfect connection - for frequencies lower than 2-3GHz this is a good approximation and greatly simplifies the simulation model. 7.8(b) shows the RF circuit complete with ferrite. Two further variants may be considered, that where the ferrite is replaced by either vacuum (to indentify how the ferrite damps the otherwise present modes) and replacing the ferrite with PEC (to see whether it is the ferrite or the small aperture that reduces the coupling of the beam to the surrounding vacuum tank). | 139 |
| 7.9 | The longitudinal impedance of the TCTP collimator for a number different configurations. Shown is the system using the ferrite damping system (ferrite being 8C11 in this case), RF fingers as in phase 1, and the RF system with the ferrite replaced by PEC. The real 7.9(a) and imaginary 7.9(b) components are shown. | 140 |
| 7.10 | The real component of the longitudinal impedance for the TCTP collimator as simulated in the frequency domains for the case with and without ferrite damping tiles. The strong resonances present in the case without ferrite can be seen to be strongly damped when the ferrite tiles are added. However a substantial broadband component occurs in addition due to the broadened resonance peaks. | 142 |

| | |
|---|-----|
| 7.11 The different thermally sensitive components of the TCTP collimator highlighted in purple. 7.11(a) shows the ferrite tiles, and 7.11(b) the longitudinal RF fingers. | 145 |
| 7.12 The temperature increase of the ferrite damping tiles in the TCTP collimator under a number of beam operating conditions and for a number of different jaw support materials. Plot taken from [5]. | 147 |
| 8.1 An example layout of a injection system for an accelerator. Taken from [6] | 148 |
| 8.2 The location of the LHC injection systems in the LHC ring. | 150 |
| 8.3 8.1 A cross section of an MKI. Visible are the alternating HV and ground plates, seperated by capacitor plates. The HV drive plate and the ground return can be seen in the c core of the ferrite yoke. | 150 |
| 8.4 The heating of the MKIs at 8.4(a) IP2 and 8.4(b) IP8 during 2011 in the LHC. Note MKI8b and MKI8d experience significantly more heating than the other MKIs. | 153 |
| 8.5 The location of the temperature measuring thermacouples in the MKI. The upstream end is towards the capacitive coupling end of the beam screen. | 154 |
| 8.6 The measurement setup for the two wire measurement setup. The 180° hybrid can be seen on top of the vacuum flange. | 156 |
| 8.7 The simulation model of the LHC injection kickers implemented in CST Particle Studio. | 156 |
| 8.8 The longitudinal impedance of the LHC MKI acquired by measurements using the resonant coaxial wire method and time domain simulations using CST Particle Studio. | 157 |
| 8.9 The dipolar impedances of the LHC MKI acquired by measurements using the resonant coaxial wire method and time domain simulations using CST Particle Studio. 8.9(a) shows the horizontal dipolar impedance, and 8.9(b) the vertical dipolar impedance | 157 |

| | |
|--|-----|
| 8.10 The quadrupolar impedances of the LHC MKI acquired by measurements using the resonant coaxial wire method and time domain simulations using CST Particle Studio. | 158 |
| 8.11 The constant transverse impedances of the LHC MKI acquired by measurements using the resonant coaxial wire method and time domain simulations using CST Particle Studio. | 158 |
| 8.12 The additional screen conductors and the elongated spheres place in MKI8d to reduce both beam coupling impedance and the electric potential build up. | 164 |
| 8.13 The real component of the longitudinal beam coupling impedance of the replacement MKI8d with 19 screen conductors from both simulations and measurements. The corresponding impedance for an MKI with 15 screen conductors is shown for comparison. | 165 |
| 8.14 The temperature profile of the IP8 injection kicker magnets during the time period before and after technical stop 3 (TS3), when the MKI8d was changed from a kicker magnet with 15 screen conductors to one with 19 screen conductors. It can be seen this magnet (solid red trace) goes from being the hottest magnet to the coolest after TS3. | 166 |
| 8.15 The geometries simulated for the various components in the LHC-MKI. These are ferrite only 8.15(a), ferrite and the ceramic beam screen 8.15(b), ferrite with the beam screen containing 24 screen conductors 8.15(c) and finally the complete MKI magnet 8.15(d). | 168 |
| 8.16 The 8.16(a) real component and the 8.16(b) imaginary components of the LHC MKI kicker magnet impedances for different quantities of components in the magnet. | 169 |
| 8.17 Beam screens with different numbers of screen conductors removed from the design quantity of 24. Models of 15 8.17(a), 19 8.17(b) and 24 8.17(c) screen conductors are considered for the impedance simulations. Conductors surrounded by the boxes are removed in this case. | 170 |

| | |
|--|-----|
| 8.18 Beam screens with different numbers of screen conductors removed from the design quantity of 24. Models of 17 8.18(a), 19 8.18(b), 20 8.18(c) and 24 8.18(d) screen conductors are considered for the impedance simulations. Conductors that are coloured red are the removed in each case. . . | 171 |
| 8.19 The longitudinal impedance of the MKIs with different numbers of screen conductors included in the beam screen. Shown is the real component 8.19(a) and the imaginary component 8.19(b) of the longitudinal impedance. | 172 |
| 8.20 8.20(a) The cut down simulation model used for simulations of the MKI beam screen with 24 screen conductors and 8.20(b) an illustrated diagram of the capacitively coupled end of the beam screen. | 173 |
| 8.21 A comparison of the mesh that may be generated in CST Particle Studio using both the full model 8.21(a) and the cutdown model 8.21(b). Blue squares reresent a meshing failure which inserts perfect electrical conductor into the model. The simulation time for the first is on the order a day, for the second 30 minutes. | 173 |
| 8.22 8.22(a) The real component of the longitudinal beam coupling impedance for different lengths of the overlap, and ?? a zoomed in plot of the first resonances of all the overlaps with the calculated resonance frequency for each | 174 |
| 8.23 The impedance of the beam screen with 24 screen conductors with an overlap $L_{overlap} = 100mm$ and the predicted resonance frequencies from Eqn. ?? shown as blue lines. | 174 |
| 8.24 The variance of the real beam coupling impedance with the tube thickness. External diameters of 50, 53 and 56mm correspond to tube thicknesses of 8, 11 and 14mm respectively. | 175 |
| 8.25 A MKI beam screen design with alternating lengths of screen conductors - seperated by a length b. | 178 |

| | |
|---|-----|
| 8.26 A MKI beam screen design with tapered lengths of screen conductors. The taper may be altered to acquire the desired combination of impedance and induced voltage on the screen conductors. | 178 |
| 8.27 A MKI beam screen design with a combination of tapered and alternating screen conductors. The degree of alternating and tapering may change dependent of the desired impedance and induced voltage on the screen conductors. | 179 |
| 8.28 A MKI beam screen design with enclosed slots (shown in comparison to the usual beam screen design with open slots) for the screen conductors. . | 179 |
| 8.29 A MKI beam screen design using an alternative screen conductor layout in which 2 (cross section shown here) conductors are connected to ground at the downstream end of the screen, and all conductors are welded together at the capacitively coupled end. | 180 |
| 8.30 A MKI beam screen design implementing a replacement of some of the external metallization with a metallic cylinder so as to pull the ground plane closest to the screen conductors away. | 180 |
| 8.31 The proposed final MKI design. A combination of alternating and tapered screen conductors is used, along with a step out of the external metalliza- tion. The outline of the step out is shown by the red-dashed line. | 181 |
| 8.32 The real component of the beam coupling impedance for a number of the proposed beam screen designs 8.32(a). In addition the imaginary compo- nent of the longitudinal impedance is shown for completeness 8.32(b). . . | 182 |
| 8.33 The variation of the predicted beam induced power loss with bunch length for a number of screen designs. The variation for 25ns 8.33(a) and 50ns 8.33(b) machine settings. | 183 |
| 8.34 The maximum steady-state temperature reached by the ferrite yoke in the MKI depending on the power load on the ferrite yoke as calculated using a 2D cross section of the MKI. Provided by M. Garlasche et al [cite]. . . . | 184 |

Abstract

Wakefields and the corresponding frequency-domain phenomenon beam coupling impedance have been well studied for a number of years as a source of beam instabilities within particle accelerators. With the development of the Large Hadron Collider (LHC) and the large and growing beam currents stored in the LHC during fills for physics production, wakefield driven instabilities and strong beam induced heating in many pieces of equipment have become a limiting factor in luminosity production due to both instantaneous luminosity and the available running time for collisions.

In this thesis is presented an in depth study of the beam coupling impedance of two important (from both an impedance and operational point of view) pieces of equipment in the LHC; the collimation system and the injection kicker magnets (MKIs). These two systems have both been significant sources of concern for the beam impedance of the LHC, the collimators due to their large transverse impedance and the MKIs due to the large quantity of heating observed during the systematic increase of beam current during operation in 2011 and 2012. The source of the heating for the MKIs is studied in depth, tracing the source to beam-induced heating from power lost by the beam to wake-fields in the MKIs. Simulations and measurements are used to characterise the impedance and localise the components responsible for the high impedance, found to be the beam screen of the magnet. Improvements to the beam screen have been proposed and examined from the beam impedance perspective. As part of the verification of the simulation models by comparison of measurement and simulation results, a new method for measuring the quadrupolar and constant transverse impedances of an asymmetric structure using a coaxial wire technique is proposed and verified using computational simulations. For

the collimation system a new RF damping system using ferrites to damp cavity modes is studied and compared to the existing RF damping system, again with a focus on the beam-induced heating on the ferrite in the damping system. As part of this, a study of the heat loss within a ferrite damped cavity is presented, focusing on the location of the power loss for cavities being damped to varying degrees. Supporting background information on the calculation of beam-induced heating due to various types of impedances, the use of bench top and beam based measurement of the beam coupling impedance of accelerator components and the machine as a whole and the various types of impedance reduction techniques is also included, in particular the appropriate use of each type of impedance reduction along with the potential drawbacks that they may have in their use.

Declaration

No portion of the work referred to in this thesis has been submitted in support of an application for another degree or qualification of this or any other university or other institution of learning.

Hugo Alistair Day

School of Physics and Astronomy

University of Manchester

Oxford Road

Manchester

M13 9PL

November 2006

Copyright

Copyright in text of this thesis rests with the Author. Copies (by any process) either in full, or of extracts, may be made **only** in accordance with instructions given by the Author and lodged in the John Rylands University Library of Manchester. Details may be obtained from the Librarian. This page must form part of any such copies made. Further copies (by any process) of copies made in accordance with such instructions may not be made without the permission (in writing) of the Author.

The ownership of any intellectual property rights which may be described in this thesis is vested in The University of Manchester, subject to any prior agreement to the contrary, and may not be made available for use by third parties without the written permission of the University, which will prescribe the terms and conditions of any such agreement.

Further information on the conditions under which disclosures and exploitation may take place is available from the Head of the School of Physics and Astronomy.

The Author

The author grew up in the south of the UK, leaving King Edward VI Grammar School in 2005 to read physics at the University of Southampton. In 2008 he was lucky enough to be selected for a summer studentship at CERN studying particle behaviour in the spectrometer of the 3MeV test bed for the Linac4 H- source. After graduating from Southampton in 2009 with an MPhys in Physics he went north to study for a PhD in the School of Physics and Astronomy at the University of Manchester. He was able to acquire a Doctoral Studentship from the CERN Doctoral Student Programme and subsequently spent three exceptional years at CERN, Switzerland.

Acknowledgements

Chapter 1

Introduction

1.1 The CERN Accelerator Complex

CERN (Organisation europeene pour la recherche nucleaire) is a particle physics laboratory near Geneva, Switzerland crossing the Franco-Swiss border between the Swiss commune of Meyrin and French town of Saint-Genis Pouilly. It was founded in 1952 with the creation of the Conseil Européen pour la Recherche Nucléaire, which became the Organisation in 1954. It houses an accelerator complex (shown in Fig. 1.1) ranging in energies from hundreds of MeV (extraction energy for Linac2) to energies of 7TeV (for the LHC), delivering proton bunches to various experiments (fixed target, colliding and beam) at all energy levels. These experiments have a variety of aims, varying from neutrino physics [7], neutron physics [8] antimatter experiments [9, 10, 11] as well as radio isotope [12] and hadron therapy [13] research. The Large Hadron Collider (LHC), the largest accelerator at CERN, is at the forefront of high-energy physics designed to push the energy frontier of knowledge of particle physics.

1.2 The LHC

The LHC is a synchrotron built to collide counter rotating beams of hadrons at an centre of mass energy of 14TeV for protons and 2.76TeV per nucleon for lead ions. It uses 1,232

CERN's accelerator complex

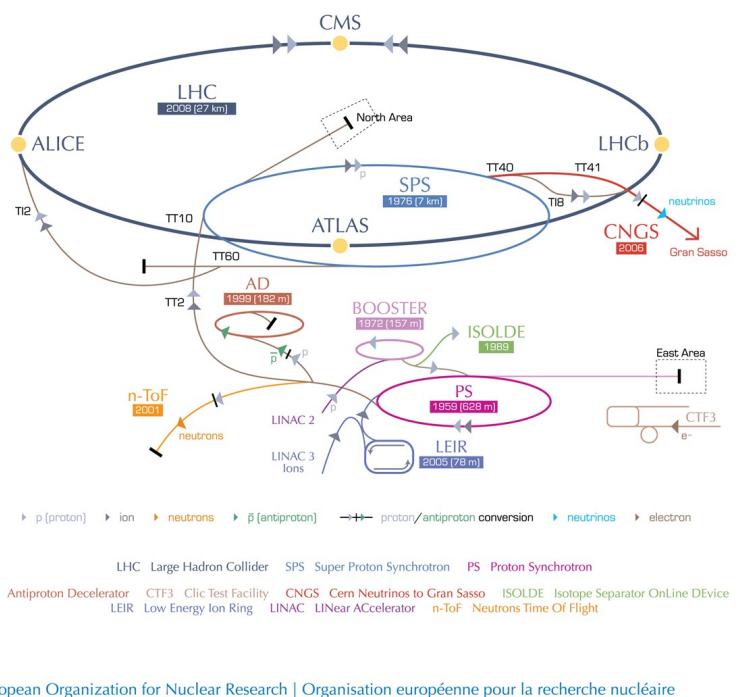


Figure 1.1: The CERN accelerator complex, showing both the proton and heavy ion (lead) accelerator chains from LINACs 2 and 3 up to the LHC. Different experimental uses are highlighted in the diagram.

superconducting dipole magnets to bend the hadron beams on a circular orbit around the beam line, in addition to using 392 quadrupole magnets for focusing in the transverse plane to maintain the bunch cross section and carry out final focusing for the 4 detector experiments in the LHC. Four detector experiments are operated at the LHC; two general purpose detectors ATLAS and CMS, used for searches of new physics beyond the current energy frontier [14, 15]; LHCb, a forward detector specialised in the analysis of B-physics [16] and ALICE, a detector specialised in heavy ion collisions with the intent of observing the physics of quark-gluon plasma [17]. Three further experiments are in place in the LHC, LHCf (an experiment related to the effects of high-energy cosmic rays), TOTEM (measuring the total cross-section of the proton via elastic scattering processes at the collision points) and MoEDAL (an experiment searching for magnetic monopoles and stable massive particles): these three complete the experiments provided with data by collisions using LHC delivered protons.

1.3 Operational Figure of Merit - Luminosity

One of the key figures of merit for the operation of the LHC (along with the centre of mass energy) is the luminosity at the colliding interaction regions (IRs). This is a figure which denotes the total rate of production of new (in the sense of produced during interactions during collisions between protons) particles in collider experiments. It can be thought of as the factor of proportionality between the cross section of a reaction scheme and the number of interactions per second

$$\frac{dR}{dt} = \mathcal{L} \times \sigma_p \quad (1.1)$$

where $\frac{dR}{dt}$ is the interaction rate, \mathcal{L} is the luminosity and σ_p is the production cross section for a given particle production scheme. For two colliding bunches, each with a gaussian transverse cross-section, the luminosity can be given in a simplified form by

$$\mathcal{L} = \frac{N_1 N_2 f n_b}{4\pi \sigma_x \sigma_y} \quad (1.2)$$

where $N_{1/2}$ is the bunch population of beams 1 and 2 respectively, f is the revolution frequency, n_b is the number of colliding bunches in the machine and $\sigma_{x/y}$ is the gaussian bunch sigma in the horizontal and vertical planes respectively. Both the bunch populations $N_{1/2}$, the revolution frequency f and the number of bunches n_b also contribute towards the DC beam current in the machine $I_b = N_1 f e n_b$ where e is the elementary electron charge. As will be seen in Sec. 2.3.1 the expected power loss due to beam-equipment interactions is proportional to the I_b^2 , thus it can be seen that increasing the luminosity will increase the power loss experienced by equipment in a linear to quadratic fashion (the non-quadratic behaviour being due to other effects on the heating mechanism due to the changing beam current, explained more in Sec. 2.3.1).

1.3.1 Integrated Luminosity

Following from the luminosity, the determinant of the quantity of experimental data is the integrated luminosity \mathcal{L}_{int} is given by

$$\mathcal{L}_{int} = \int_0^T \mathcal{L}(t) dt \quad (1.3)$$

where T is the integrated collision time and $\mathcal{L}(t)$ is the time varying luminosity (typically decaying exponentially over the lifetime of any given fill of the collider[18]), varying due to changing beam conditions and bunch population depletion due to collisions and particle losses. The integrated luminosity is significant as the number of a given particle production schema observed by the experiments n_{event} is given by

$$n_{event} = \mathcal{L}_{int} \times \sigma_p. \quad (1.4)$$

It can thus be seen that in addition to increasing the luminosity, maximising the available time for collisions is important to maximising data collection. This requires a high level of availability of the machine, minimising failures of key systems and the down time experienced by the machine. In particular, unavoidable waiting periods between fills are to be avoided. As is shown in Chapter 8, long cool down times (on the order of hours,

similar in magnitude to the length of the average LHC fill) for equipment that requires a specific maximum temperature to operate correctly are thus unacceptable during ideal operation and should be reduced to a minimum. These and other sources of reduction of the running time and luminosity (due to both beam coupling impedance and other sources of instabilities and interlock trips due to hardware mishaps) must thus be carefully studied and controlled by the technical and operations teams.

1.4 Beam Dynamics

To introduce the terms, dynamics and coordinate systems used in later chapters we shall briefly introduce the basic transverse and longitudinal dynamics present in particle accelerators. This introduction follows the formalism introduced in [19]. First we introduce the coordinate system typically used in the consideration of circular particle accelerators. Typically an ideal orbit is defined for an on momentum particle, denoted by (ρ, θ, z) . In addition a reference frame placed upon the orbit of an ideal on-momentum particle is defined, given by (x, y, z) , shown in Fig. 1.4.

The use of charged particles within an accelerator is controlled by the use of both magnetic and electrical elements in the machine, leading to the particles being acted upon by the Lorentz force

$$\mathbf{F} = q(\mathbf{E} + \mathbf{v} \times \mathbf{B}) \quad (1.5)$$

where q is the charge of the particle, \mathbf{E} is the electric field, \mathbf{B} is the magnetic field and \mathbf{v} is the particles velocity. In high energy particle accelerators the magnetic and electric fields are typically separated in location, with the magnetic fields only having a transverse component, being of the form

$$\mathbf{B} = \hat{\mathbf{x}}B_x + \hat{\mathbf{y}}B_y \quad (1.6)$$

where $B_{x/y}$ is the magnetic field component in the x - and y -axis respectively. Due to the cross product between the velocity ($\mathbf{v} = \hat{\mathbf{z}}v$), it can be seen that there is no component

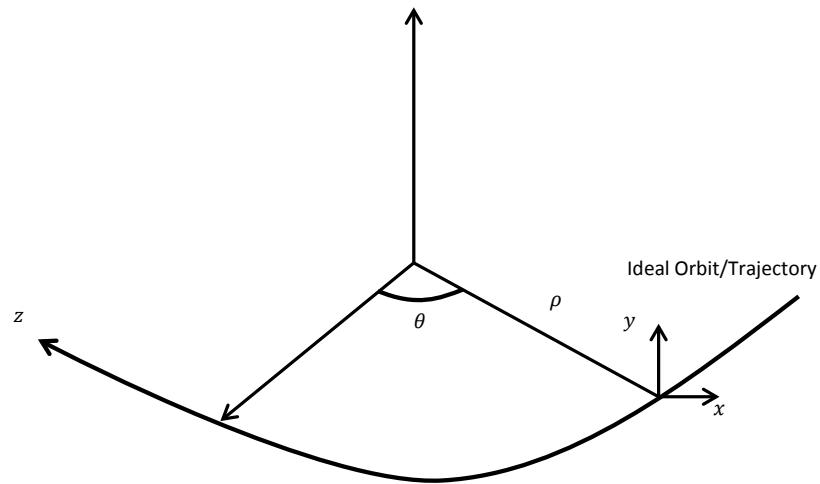


Figure 1.2: The representation of the coordinate system of a circular accelerator, and additionally the co-moving reference frame of a circulating particle.

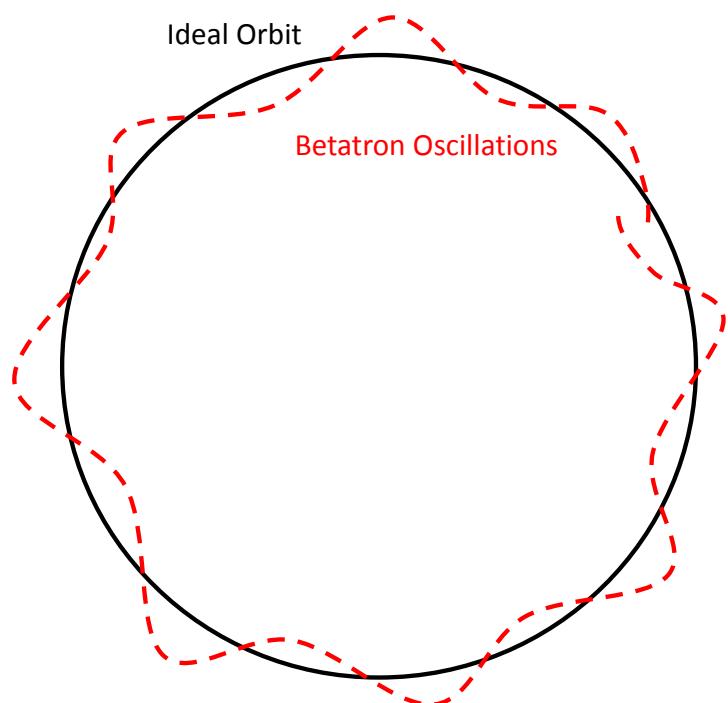


Figure 1.3: An illustration of betatron oscillations around the ideal orbit of a circular accelerator. These oscillations occur in both the horizontal and vertical planes.

of the force from the magnetic field in the z -direction. In addition the electric field usually only has a longitudinal component such that $\mathbf{E} = \hat{\mathbf{z}}E_z$. This results in the separation of transverse and longitudinal motion such that

$$F_{\parallel} = qE \quad (1.7)$$

$$\mathbf{F}_{\perp} = q(vB_y\hat{\mathbf{x}} - vB_x\hat{\mathbf{y}}). \quad (1.8)$$

Subsequently the transverse and longitudinal motion may both be treated independently of one another.

1.4.1 Linear Transverse Dynamics

If we consider a charged particle of mass m and charge e moving with velocity v along the ideal orbit under the effect of the magnetic field B we can see that the Lorentz force ($F_L = qvB$) and the centrifugal force ($F_{cen} = \frac{\gamma mv^2}{\rho}$) are equivalent, leading to the relation

$$\frac{p}{e} = B\rho \quad (1.9)$$

where p is the particles momentum. $B\rho$ is referred to as the beam rigidity, denoting the constant term necessary to keep a particle on the ideal orbit.

If we consider the motion of a particle transversally displaced from the ideal orbit particle with a position (x, y) we must consider the variation of the magnetic field in the transverse directions. If we consider first just the horizontal motion, we can carry out a Taylor expansion of the field which gives us

$$B_y(x) = B_{y0} + \frac{dB_y}{dx}x + \frac{1}{2!}\frac{d^2B_y}{dx^2}x^2 + \frac{1}{3!}\frac{d^3B_y}{dx^3}x^3 + \dots \quad (1.10)$$

which is then normalised by p/e

$$\frac{B_y(x)}{p/e} = \frac{B_{y0}}{B_{y0}\rho} + \frac{1}{p/e}\frac{dB_y}{dx}x + \frac{1}{p/e}\frac{1}{2!}\frac{d^2B_y}{dx^2}x^2 + \frac{1}{p/e}\frac{1}{3!}\frac{d^3B_y}{dx^3}x^3 + \dots \quad (1.11)$$

For the time being we shall consider only small displacements in x and y , thus shall consider only the linear terms, giving

$$\frac{B_y(x)}{p/e} = \frac{1}{\rho} + \frac{1}{p/e} \frac{dB_y}{dx} x \quad (1.12)$$

$$\frac{B_y(x)}{p/e} = \frac{1}{\rho} + kx \quad (1.13)$$

where $k = \frac{g}{p/e}$, $g = \frac{2\mu_0 n I}{r^2}$ is the gradient of a quadrupole magnet (a magnet which has a magnetic field strength linearly proportional to displacement), with n being the number of turns on the solenoid, I the current and r the solenoid half-aperture. This indicates that separation of the function of magnets is valid method of controlling the particles, using dipole and quadrupole fields. Next, to derive the equations of motion we shall consider the equation for radial acceleration a_r for a particle undergoing rotational acceleration in the defined coordinate system

$$a_r = \frac{d^2\rho}{dt^2} - \rho \left(\frac{d\theta}{dt} \right)^2. \quad (1.14)$$

For the particle on the ideal orbit $\rho = constant$, so $\frac{d\rho}{dt} = 0$, leading to the accelerative force being derived to be

$$F_x = m\rho \left(\frac{d\theta}{dt} \right)^2 = m\rho\omega^2 = \frac{mv^2}{\rho} \quad (1.15)$$

For a general particle, $\rho \rightarrow \rho + x$, leading to

$$F_x = m \frac{d^2}{dt^2} (x + \rho) - \frac{mv^2}{x + \rho} = eB_y v. \quad (1.16)$$

As $\rho = constant$, $\frac{d^2}{dt^2}(x + \rho)$ becomes $\frac{d^2x}{dt^2}$. In addition we are dealing with displacements of $x \ll \rho$, so we may approximate $\frac{1}{x+\rho} \approx \frac{1}{\rho}(1 - \frac{x}{\rho})$ from the taylor expansion and taking linear terms in x . Thus we acquire the equation

$$m \frac{d^2x}{dt^2} - \frac{mv^2}{\rho} \left(1 - \frac{x}{\rho} \right) = eB_y v. \quad (1.17)$$

Subsequently we substitute the magnetic field $B_y = B_{y0} + \frac{dB_y}{dx}x$ and arrive at

$$m \frac{d^2x}{dt^2} - \frac{mv^2}{\rho} \left(1 - \frac{x}{\rho}\right) = ev \left[B_{y0} + \frac{dB_y}{dx} x\right]. \quad (1.18)$$

By dividing through by the mass m

$$\frac{d^2x}{dt^2} - \frac{v^2}{\rho} \left(1 - \frac{x}{\rho}\right) = \frac{evB_{y0}}{m} + \frac{ev}{m} \frac{dB_y}{dx} x. \quad (1.19)$$

Next we transform the coordinate from $t \rightarrow z$, such that

$$\frac{d^2x}{dt^2} = \frac{d}{dt} \left(\frac{dx}{dz} \frac{dz}{dt} \right) = \frac{d}{dz} \left(\frac{dx}{dz} \frac{dz}{dt} \right) \frac{dz}{dt} = \frac{d^2x}{dz^2} \left(\frac{dz}{dt} \right)^2 + \frac{dx}{dz} \frac{d}{dz} \left(\frac{dz}{dt} \right) \frac{dz}{dt}. \quad (1.20)$$

It can be seen that $\frac{dz}{dt} = v$, which is kept constant in this treatment. Therefore

$$\frac{d^2x}{dt^2} = \frac{d^2x}{dz^2} v^2. \quad (1.21)$$

Thus we arrive at the equation

$$\frac{d^2x}{dz^2} v^2 - \frac{v^2}{\rho} \left(1 - \frac{x}{\rho}\right) = \frac{evB_{y0}}{m} + \frac{ev}{m} \frac{dB_y}{dx} x. \quad (1.22)$$

We then subsequently normalise by momentum and rearrange slightly to acquire

$$\frac{d^2x}{dz^2} - \frac{1}{\rho} + \frac{x}{\rho^2} = \frac{B_{y0}}{p/e} + \frac{1}{p/e} \frac{dB_y}{dx} x. \quad (1.23)$$

We then remember the definition of the beam rigidity (see Eqn. 1.9) and the definition of the quadrupolar field strength arriving at

$$\begin{aligned} \frac{d^2x}{dz^2} - \frac{1}{\rho} + \frac{x}{\rho^2} &= -\frac{1}{\rho} + kx \\ \frac{d^2x}{dz^2} + \frac{x}{\rho^2} &= kx \\ \frac{d^2x}{dz^2} + x \left(\frac{1}{\rho^2} - k \right) &= 0. \end{aligned} \quad (1.24)$$

For the vertical plane the equation is the same, except that the focusing term is negative and there is no ρ term, giving

$$\frac{d^2y}{dz^2} + ky = 0. \quad (1.25)$$

It is interesting to note that there is a focusing term due to the dipolar magnet term. Historically this is the weak focusing effect, as opposed to the strong focusing regime of using quadrupole magnets. It can be seen these equations are simply the equations of motion of a harmonic oscillator with spring constants $K_{x/y}$ given by

$$K_x = \frac{1}{\rho^2} - k$$

$$K_y = k$$

leading to a general solution

$$x/y(s) = a_1 \cos(\sqrt{K_{x/y}} s) + a_2 \sin(\sqrt{K_{x/y}} s). \quad (1.26)$$

For a modern particle accelerator using focusing and defocusing magnets arranged in a periodic lattice (i.e. so that $k(s)$ becomes a periodic function such that $k(s+L) = k(s)$ where L is the length of the period of the lattice), and applying initial conditions $x(0) = x_0, x'(0) = x'_0$ it is possible to finally arrive at the solution for the motion of a particle through a periodic lattice

$$x(s) = \sqrt{\epsilon} \sqrt{\beta(s)} \cos(\psi(s) + \phi) \quad (1.27)$$

where ϵ and ϕ are integration constants determined by the initial conditions, $\beta(s)$ is a periodic function determined by the focusing properties of the lattice. $\psi(s)$ is the phase advance of the oscillation, again determined by the lattice design parameters. One key important figure acquired from this derivation is the tune (also called the betatron tune) of the accelerator, that is the number of oscillations per turn, given by

$$Q = \frac{1}{2\pi} \oint \frac{ds}{\beta(s)}. \quad (1.28)$$

Off-Momentum Particles

During the operation of a particle accelerator there is often have a spread of particle energies due to dynamics in the longitudinal plane [20]. This gives rise to a momentum spread $\Delta p/p$ in the particle momentum. When considered in Eqn. ?? this gives rise to an inhomogenous differential equation of the form

$$\frac{d^2x}{dz^2} + x \left(\frac{1}{\rho^2} - k \right) = \frac{\Delta p}{p} \frac{1}{\rho} \quad (1.29)$$

which leads to a modified solution of the harmonic oscillator equation characterised by the dispersion of the lattice $D(s)$, written as

$$x(s) = \sqrt{\epsilon} \sqrt{\beta(s)} \cos(\psi(s) + \phi) + \frac{\Delta p}{p} D(s). \quad (1.30)$$

This can be seen as another closed orbit solution to the machine lattice. One side effect of this is the slight change in the tune due to the off momentum particles, characterised by a factor known as the chromaticity ζ , related by

$$\frac{\Delta Q}{Q_0} = \zeta \frac{\Delta p}{p} \quad (1.31)$$

where ΔQ is the tune shift from the lattice tune for an on momentum particle Q_0 . The tune working point is an important factor in designing an accelerator as crossing integer or low order tune fractions (half, third or quarter integer) allows the summation of kicks in the machine driving large oscillations which may ultimately lead to particle loss.

Chapter 2

Wakefields and Impedance

2.1 Wakefields

Wakefields are the conventional name given to the phenomenon of induced electromagnetic fields due to charged particles traversing the beam pipe, RF cavities and many other pieces of equipment facing a particle beam in a particle accelerator. They have long been studied as a source of collective instabilities within particle accelerators [21], through the use of analytical models for different beam pipe geometries [22, 23, 24] and materials [25], using computational simulation tools, and both beam-based and bench-top measurement techniques. In this chapter is presented a number of significant properties of wakefields and their frequency domain counterpart, beam coupling impedance, as well a select example of observable effects that wakefields produce.

To aid in the explanation there will first be a short definition of the relative positions and labels of particles used in the following section (this derivation follows the examples given by Stupakov [22] and Palumbo [26]). We define the source, or inducing particle as a charged particle with charge q_1 moving with velocity $\mathbf{v} = \beta c \tilde{\mathbf{z}}$ at coordinate $(\mathbf{r}_1) = x_1 \hat{\mathbf{x}} + y_1 \hat{\mathbf{y}} + z_1 \hat{\mathbf{z}}$, leading a test, or witness particle, with charge q_2 , moving with velocity \mathbf{v} at coordinate $(\mathbf{r}_2) = x_2 \hat{\mathbf{x}} + y_2 \hat{\mathbf{y}} + z_2 \hat{\mathbf{z}}$ at a distance $z_1 - z_2$ behind the source particle. This relationship is visualised in Fig. 2.1.

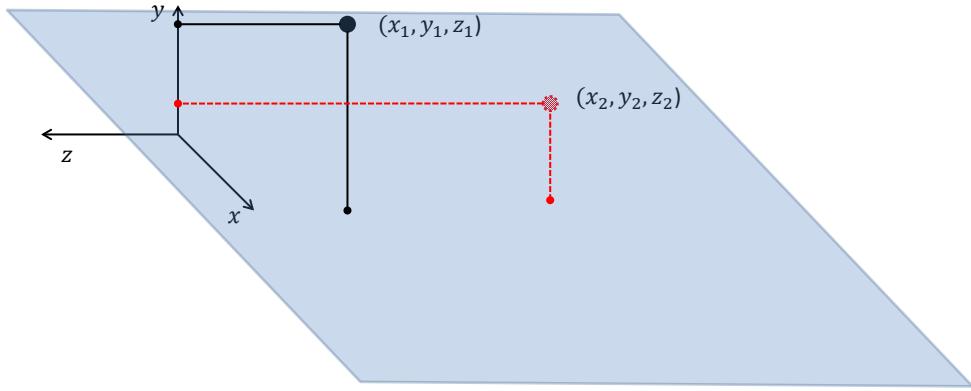


Figure 2.1: The relative displacements and velocities of the source and test particles.

2.1.1 The Electromagnetic Fields of a Moving Charged Particle in Free Space

If we consider the electromagnetic fields generated by the source particle, it can be shown that the fields at a vector $\mathbf{R} = \mathbf{r}_1 - \mathbf{r}_2$ is given by

$$\mathbf{E}(\mathbf{R}) = \frac{q_1 \mathbf{R}}{\gamma^2 |\mathbf{R}|^3} \quad (2.1)$$

$$\mathbf{H}(\mathbf{R}) = \frac{1}{c} \mathbf{v} \times \mathbf{E} \quad (2.2)$$

where $\gamma = \sqrt{1 - v^2/c^2}$ is the relativistic gamma factor. It can be shown that, if we take the ultrarelativistic limit (i.e. $\gamma \rightarrow \infty$) we can see that Eqn 2.2 becomes

$$\mathbf{E}(\mathbf{R}) = \frac{2q_1 \mathbf{r}}{r^3} \delta z - ct \mathbf{H}(\mathbf{R}) = \hat{\mathbf{z}} \times \mathbf{E} \quad (2.3)$$

where $\mathbf{r} = x\hat{\mathbf{x}} + y\hat{\mathbf{y}}$ is a purely transverse vector.

The following witness particle experiences the resulting Lorentz force

$$\mathbf{F}(\mathbf{r}_1, \mathbf{r}_2) = q_2 [\mathbf{E} + \mathbf{v} \times \mathbf{B}]. \quad (2.4)$$

Looking at Eqn. 2.3, it can be seen that the force can be separated into longitudinal and transverse components

$$F_{\parallel}(\mathbf{r}_1, \mathbf{r}_2) = q_2 E_{\parallel} \quad (2.5)$$

$$\mathbf{F}_{\perp}(\mathbf{r}_1, \mathbf{r}_2) = q_2 [\mathbf{E}_{\perp} + \mathbf{v} \times \mathbf{B}] \quad (2.6)$$

where $E_{\parallel} = \mathbf{E} \cdot \hat{\mathbf{z}}$ and $\mathbf{E}_{\perp} = E_x \hat{\mathbf{x}} + E_y \hat{\mathbf{y}}$. F_{\parallel} has only an electric component as the magnetic flux density \mathbf{B} has magnitude = 0 in the $\hat{\mathbf{z}}$ direction. Considering just the longitudinal force, integrating over all space gives the total energy change of the source particle

$$U_1(\mathbf{r}_1) = -q_2 \int_{-\infty}^{\infty} d\mathbf{z} \cdot \mathbf{F}(\mathbf{r}_1, \mathbf{r}_2), \quad (2.7)$$

where $t = z_1/\beta c = z_1/c$ in the ultrarelativistic case. Similarly the energy change in the witness particle can be calculated by

$$U_2(\mathbf{r}_1, \mathbf{r}_2, \tau) = -q_2 \int_{-\infty}^{\infty} d\mathbf{z} \mathbf{F}(\mathbf{r}_1, \mathbf{r}_2), \quad (2.8)$$

where $t = z_1/\beta c = z_1/c + \tau$ and $\tau = (z_1 - z_2)/\beta c$ is the time between the source and witness particle. From these two energy losses two widely used terms can be extracted; the loss factor k , given by

$$k(\mathbf{r}_1) = \frac{U_1(\mathbf{r}_1)}{q_1} \quad (2.9)$$

and the longitudinal wake function, given by

$$w_{\parallel}(\mathbf{r}_1, \mathbf{r}_2, \tau) = \frac{U_2(\mathbf{r}_1, \mathbf{r}_2, \tau)}{q_1 q_2}, \quad (2.10)$$

denoting the normalised (with respect to source charge, and source and witness charge respectively) energy change of both the source particle (loss factor) and witness particle (wake function).

2.1.2 Wakefields of a Bunch

As colliders are often used to collide bunches of particles as opposed to single particles, it is useful to be able to define the wake function of a bunch distribution. It can be seen that the total source charge of a bunch q_1 is the integral of the longitudinal current distribution $i_b(\tau)$ integrated over all time

$$q_1 = \int_{-\infty}^{\infty} i_b(\tau) d\tau. \quad (2.11)$$

The wake function of a bunch distribution at a point at time τ can be calculated by the convolution of the single particle wake function with the bunch distribution. Thus, if the bunch is split into infinitesimally small slices, the change in energy of a witness particle of charge q at time τ due to a slice at time τ' is given by

$$dU(\mathbf{r}_2, \tau - \tau') = q i_b(\tau') w_{\parallel}(r_2, \tau - \tau'). \quad (2.12)$$

The longitudinal bunch wake function $W_{\parallel}(\mathbf{r}_2)$ can then be calculated using Eqn. 2.8

$$W_{\parallel}(\mathbf{r}_2, \tau) = \frac{U(r_2, \tau)}{q_1 q_2} = \frac{1}{q_1} \int_{-\infty}^{\infty} i_b(\tau') w_{\parallel}(r_2, \tau - \tau') d\tau'. \quad (2.13)$$

2.1.3 Transverse Wakefields

Similar to the longitudinal wakefield, we can see that the total transverse momentum change of the witness particle is given by integrating the transverse force across all space

$$\mathbf{P}(\mathbf{r}_1, \mathbf{r}_2, \tau) = \int_{-\infty}^{\infty} \mathbf{F}_{\perp}(\mathbf{r}_1, \mathbf{r}_2) dz \quad (2.14)$$

where $t = z_1/c + \tau$ and again τ is the time delay between source and witness particles. And similarly to the longitudinal plane we can define a wake function normalised with regards to the source and witness particle charges

$$\mathbf{w}_{\perp}(\mathbf{r}_1, \mathbf{r}_2, \tau) = \frac{\mathbf{P}(\mathbf{r}_1, \mathbf{r}_2, \tau)}{q_1 q_2}. \quad (2.15)$$

And in a similar manner to the longitudinal bunch wake function a form for the transverse bunch wake function can be derived

$$W_{\perp}(\mathbf{r}_2, \tau) = \frac{U(r_2, \tau)}{q_1 q_2} = \frac{1}{q_1} \int_{-\infty}^{\infty} i_b(\tau') w_{\perp}(r_2, \tau - \tau') d\tau'. \quad (2.16)$$

2.1.4 Panowsky-Wenzel Theorem

Considering the force acting on the witness particle it can be seen to simply by the Lorentz force

$$\mathbf{F} = q_2 [\mathbf{E} + \mathbf{v} \times \mathbf{B}] \quad (2.17)$$

Now, considering Faraday's law in integral form ($\mathbf{B} = - \int_{t_1}^{t_2} (\nabla \times \mathbf{E}) dt$, t_1 being sufficiently in the past that $\nabla \times \mathbf{E} \rightarrow 0$), Eqn. 2.17 can be rewritten as

$$\mathbf{F} = q_2 \left[\mathbf{E} - \mathbf{v} \times \left(\int_{t_1}^{t_2} \nabla \times \mathbf{E} dt \right) \right]. \quad (2.18)$$

Now, using the fact that the velocity \mathbf{v} is constant and some vector identities this then becomes

$$\mathbf{F} = q_2 \left[\mathbf{E} - \int_{t_1}^{t_2} (\nabla(\mathbf{v} \cdot \mathbf{E}) - \mathbf{v}(\nabla \cdot \mathbf{E})) dt \right]. \quad (2.19)$$

If this force is separated into the longitudinal and transverse components we see that they are the following

$$F_{\parallel} = q_2 E_z \quad (2.20)$$

$$\mathbf{F}_{\perp} = q_2 \left[\mathbf{E}_{\perp} - v \int_{t_1}^{t_2} \left(\nabla_{\perp} E_z - \frac{\partial \mathbf{E}_{\perp}}{\partial z} \right) dt \right] \quad (2.21)$$

where ∇_{\perp} is the differential operator only in the transverse coordinates. If these are now compared to the identities of the wake function for the longitudinal and transverse wake functions given in Eqns. 2.10 and 2.15 respectively, it can be seen that

$$w_{\parallel}(\mathbf{r}_1, \mathbf{r}_2, \tau) = -\frac{1}{q_1} \int_{-\infty}^{\infty} dz E_z(\mathbf{r}_1, \mathbf{r}_2) \quad (2.22)$$

$$\mathbf{w}_{\perp}(\mathbf{r}_1, \mathbf{r}_2, \tau) = \frac{1}{q_1} \int_{-\infty}^{\infty} dz \left[\mathbf{E}_{\perp}(\mathbf{r}_1, \mathbf{r}_2) - v \int_{t_1}^{t_2} \left(\nabla_{\perp} E_z(\mathbf{r}_1, \mathbf{r}_2) - \frac{\partial \mathbf{E}_{\perp}(\mathbf{r}_1, \mathbf{r}_2)}{\partial z} \right) dt \right]. \quad (2.23)$$

The next stage requires partially differentiating Eqn 2.23 by $s = v\tau = vt - z$. It can be seen from this relationship that $\partial/\partial s = -\partial/\partial z$ and $\partial/\partial s = 1/v\partial/\partial z$. Thus the first term can be replaced by $\partial/\partial s = -\partial/\partial z$, and the term the integral becomes the value of the intergrand at τ .

$$\frac{\partial}{\partial s} \mathbf{w}_{\perp}(\mathbf{r}_1, \mathbf{r}_2, \tau) = \frac{1}{q_1} \int_{-\infty}^{\infty} dz \left[\frac{-\partial}{\partial z} \mathbf{E}_{\perp} - \left(\nabla_{\perp} E_z + \frac{\partial \mathbf{E}_{\perp}}{\partial z} \right) dt \right]. \quad (2.24)$$

It can be seen that the first and third integrand cancel. Also, the operator ∇_{\perp} may be moved to the front of the operation without changing the equation, thus

$$\frac{\partial}{\partial s} \mathbf{w}_{\perp}(\mathbf{r}_1, \mathbf{r}_2, \tau) = \frac{1}{q_1} \int_{-\infty}^{\infty} dz \nabla_{\perp} E_z = \nabla_{\perp} w_{\parallel}(\mathbf{r}_1, \mathbf{r}_2, \tau). \quad (2.25)$$

2.2 Impedances

In a particle accelerator there are a large number of components that have frequency dependent properties, either due to their geometry (for example resonant cavity structures) or material properties (frequency dependent permittivity/permeability in devices, for example ferrite in normal conducting kicker magnets). In addition many instability mechanisms are strongly modal in nature, thus a frequency analysis of the possible sources of impedance is incredibly valuable.

2.2.1 Beam Coupling Impedance

The longitudinal beam coupling impedance Z_{\parallel} and the transverse beam coupling impedance Z_{\perp} are defined as the Fourier transforms of the single particle wake function, given by

$$Z_{\parallel}(\mathbf{r}_1, \mathbf{r}_2, \omega) = \int_0^{\infty} d\tau w_{\parallel}(\mathbf{r}_1, \mathbf{r}_2, \tau) e^{-j\omega\tau} \quad (2.26)$$

$$Z_{\perp}(\mathbf{r}_1, \mathbf{r}_2, \omega) = j \int_0^{\infty} d\tau w_{\perp}(\mathbf{r}_1, \mathbf{r}_2, \tau) e^{-j\omega\tau} \quad (2.27)$$

where $\omega = 2\pi/\tau$. In a similar way the bunch wake function can be related to the longitudinal and transverse beam coupling impedance by considering the Fourier transform of the time dependent bunch current $\lambda(\omega) = \int_{-\infty}^{\infty} d\tau i_b(\tau) e^{-j\omega\tau}$, which allows it to be shown that

$$W_{\parallel}(\mathbf{r}_2, \tau) = \int_{-\infty}^{\infty} d\omega Z_{\parallel}(\mathbf{r}_1, \mathbf{r}_2, \omega) \lambda(\omega) e^{-j\omega\tau} \quad (2.28)$$

$$W_{\perp}(\mathbf{r}_2, \tau) = \int_{-\infty}^{\infty} d\omega Z_{\perp}(\mathbf{r}_1, \mathbf{r}_2, \omega) \lambda(\omega) e^{-j\omega\tau}. \quad (2.29)$$

2.2.2 Transverse Impedances

As can be seen in Eqn. 2.27, the transverse impedance is dependent on the displacement of both the source and witness particles. For reasons of simplifying beam dynamics evaluation, it is useful to distinguish the components dependent only on the transverse displacement of the source particle and that of the witness particle in the vertical and horizontal planes of the beam. This involves separating the impedance firstly into horizontal and vertical components, and subsequently into components dependent only on the displacement of the source and of the witness particle. These are called the dipolar, or driving impedance and the quadrupolar, or detuning impedance respectively. In addition it can be shown that constant transverse terms exist which must also be taken into account. These are given by

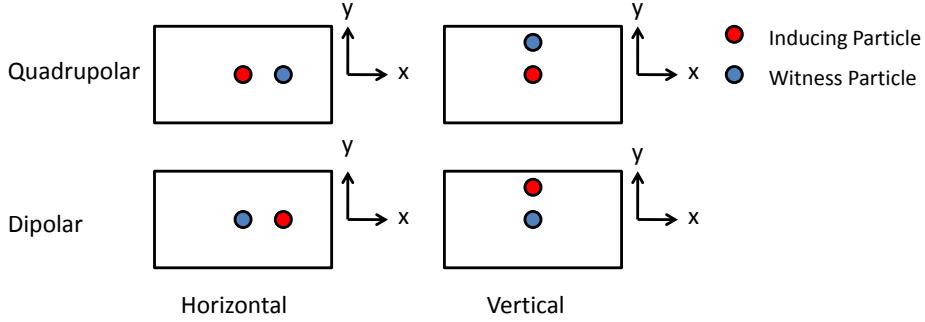


Figure 2.2: The relative displacements of the source and witness particle in the horizontal and vertical planes that identify the dipolar/driving and quadrupolar/detuning impedances.

$$Z_{\perp,x}(x_1, x_2, \omega) = Z_{dip,x}(\omega, x_1) + Z_{quad,x}(\omega, x_2) + Z_{const,x}(\omega) \quad (2.30)$$

$$Z_{\perp,y}(y_1, y_2, \omega) = Z_{dip,y}(\omega, y_1) + Z_{quad,y}(\omega, y_2) + Z_{const,y}(\omega). \quad (2.31)$$

The relative displacements of the source and witness particle are shown in Fig. 2.2 for clarity.

2.2.3 Geometric Impedance

Geometric impedances are characterised by resonant fields at a resonant frequency, typically characterised by some characteristic dimension of the structure. This is typically a characteristic length of a structure (cavity size, antenna length), which may be part of a vacuum tank, or an internal structure to the device exhibiting the resonance.

As a simple example, consider a cylindrical pillbox cavity of radius r_{cav} and length L connected to a beam pipe of radius r_{pipe} located at the centre of the cavity, as shown in Fig. 2.3. For simplicity we shall assume that the cavity is made from a perfectly conducting materials. It shall be assumed that the fields do not propagate along the attached beam pipe (i.e. for frequencies below cutoff). In this example we shall consider a particle travelling on the axis of the beam pipe, and only the longitudinal wakefunction/impedance will be investigated to simplify matters. Further details can be found in [27, 28, ?]. It can

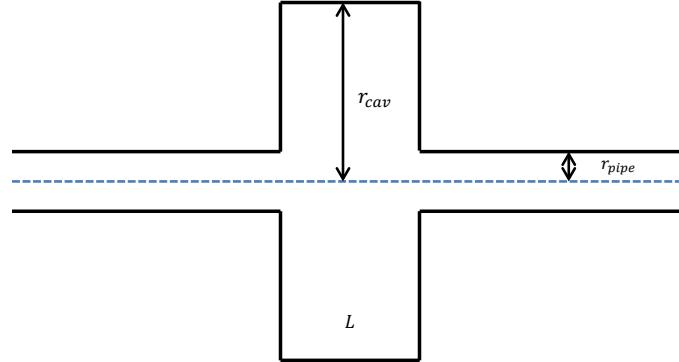


Figure 2.3: Cross section of a cylindrical pillbox cavity with an attached beam pipe

be shown that there are two families of resonant modes in in a pillbox cavity, TM-type modes and TE-type modes. The TE-type modes have no longitudinal electrical field by definition, and therefore do not contribute to the longitudinal wakefunction for an on axis particle. In a cylindrical coordinate system using coordinates (r, θ, z) , the longitudinal electrical field of the n -th order TM-type modes can be shown to be

$$E_{z,n} = E_0 J_n(k_r r) \cos(n\theta) \cos(k_z z) e^{-j\omega t} \quad (2.32)$$

where E_0 is the magnitude of the electric field, J_n is n -th order Bessel function, $k_z = n\pi/L$, and n is an interger. A wakefunction for each mode subsequently can be defined as $w_{\parallel,n}(\tau)$, where the total wakefunction is thus defined as

$$w_{\parallel}(\mathbf{r}_1, \mathbf{r}_2, \tau) = \sum_{n=0}^{\infty} w_{\parallel,n}(\tau) = \sum_{n=0}^{\infty} \int_{-\infty}^{\infty} dz E_{z,n}(r, \theta, z) \quad (2.33)$$

To evaluate the problem in the frequency domain we shall introduce the RLC parallel circuit model to simplify the frequency doman representation.

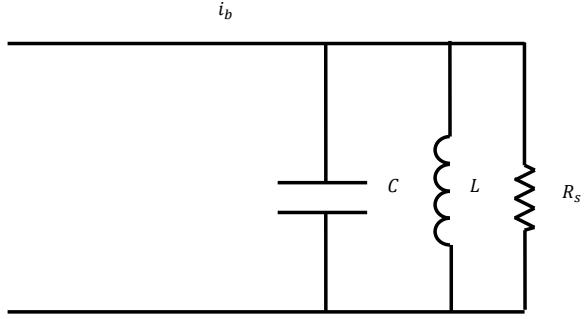


Figure 2.4: The equivalent RLC parallel circuit for a cavity resonance, driven by a current i_b , in this case the beam current

RLC Circuit Model

We can define any given resonance by an equivalent RLC circuit, which is driven by a current, shown in Fig. 2.4. The symbols represent the equivalent resistance (R), inductance (L) and capacitance (C). From this circuit a number of defining parameters are now deduced, and the physical equivalents in the physical cavity are described.

The first parameter to be derived is the resonant frequency of the cavity mode itself ω_0 . This can be shown (by solving the time varying voltage build up of the circuit in Fig. 2.4) to be given by

$$\omega_0 = \frac{1}{\sqrt{LC}}. \quad (2.34)$$

Next we define the quality factor of the cavity mode, Q_n . This factor describes the damping of the wakefunction in the cavity for a given mode, larger values indicating a longer damping time. In terms of the cavity it is given by

$$Q_n = \frac{\omega_0 W}{P_{loss}} = \omega_0 R C \quad (2.35)$$

where $W = \int_V \frac{\epsilon}{2} |\mathbf{E}|^2 dV$ is the stored electromagnetic energy in the cavity due to

the mode, and P_{loss} is the total losses in the cavity. Commonly the later is dominated by conductive losses on the cavity walls, but as will be seen in later sections, also includes losses due to other mechanisms. The final figures of merit are the $R_{s,n}/Q_n$ of the cavity mode, and the shunt impedance $R_{s,n}$ of the mode. $R_{s,n}/Q_n$ is given by

$$\frac{R_{s,n}}{Q_n} = \frac{|V_{acc}|^2}{2\omega_0 W} \quad (2.36)$$

where $V_{acc} = \int_{-\infty}^{\infty} E_{z,n} e^{-j\omega_0 z/\beta c} dz$ is the effective voltage that a traversing particle sees due to the cavity mode. It can thus be seen that the $R_{s,n}/Q_n$ of a cavity mode gives some ratio of the acceleration of a traversing particle to the stored energy. The shunt impedance $R_{s,n}$ is then given by

$$R_{s,n} = \left(\frac{R_{s,n}}{Q_n} \right) Q_n = \frac{|V_{acc}|^2}{2P_{loss}} \quad (2.37)$$


or an equivalent ratio for power loss in the cavity to acceleration of the particle. From these quality factors is defined a broadband description of the beam coupling impedance at all frequencies due to all modes, given by

$$Z_{\parallel}(\omega) = \sum_{n=0}^{\infty} Z_{\parallel,n}(\omega) = \sum_{n=0}^{\infty} \frac{R_{s,n}}{1 - iQ \left(\frac{\omega}{\omega_0} - \frac{\omega_0}{\omega} \right)}. \quad (2.38)$$

A number of examples of this type of impedance are shown in Sec. 2.3.1.

2.2.4 Resistive Wall Impedance

The resistive wall impedance is an impedance generated due to the finite conductivity of the material of the beam pipe wall. This can have a number of regimes dependent on whether the skin depth of the material $\delta(\omega) = \sqrt{\frac{2}{\mu_0 \sigma \omega}}$ is much smaller than the thickness of the beam pipe wall [29], comparable to the thickness of the beam pipe wall [30, 31] or much larger than the thickness of the beam pipe wall [32, 33]. In this instance, σ is the conductivity of wall material. It can also be shown that the shape of the beam pipe cross section also plays a significant role in defining the impedance [34, 35].

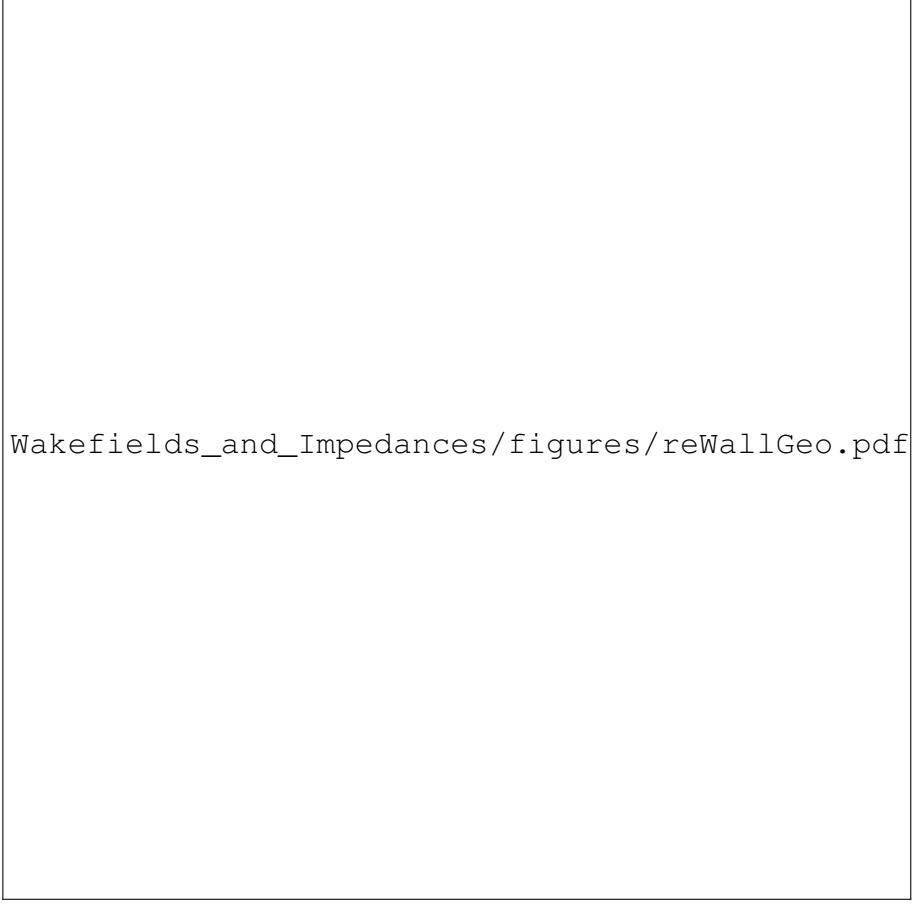

Wakefields_and_Impedances/figures/reWallGeo.pdf

Figure 2.5: The geometry of the classical thick wall formula.

Here we shall not attempt a comprehensive summary of the various resistive wall impedance models, but simply give an introduction to the classic thick wall formalism to give a sense of how changing the wall conductivity affects the resistive wall impedance. A considerably more detailed overview of this derivation can be found in [29]. Consider a circular beam pipe of radius a containing a source particle of charge q_1 moving with velocity $\mathbf{v} = \beta c \hat{\mathbf{z}}$, as shown in Fig. 2.5. In this case it shall be assumed that $\beta = 1$.

It can be shown that the beam coupling impedance per unit length L of this structure, assuming $\delta \ll b$, is given by

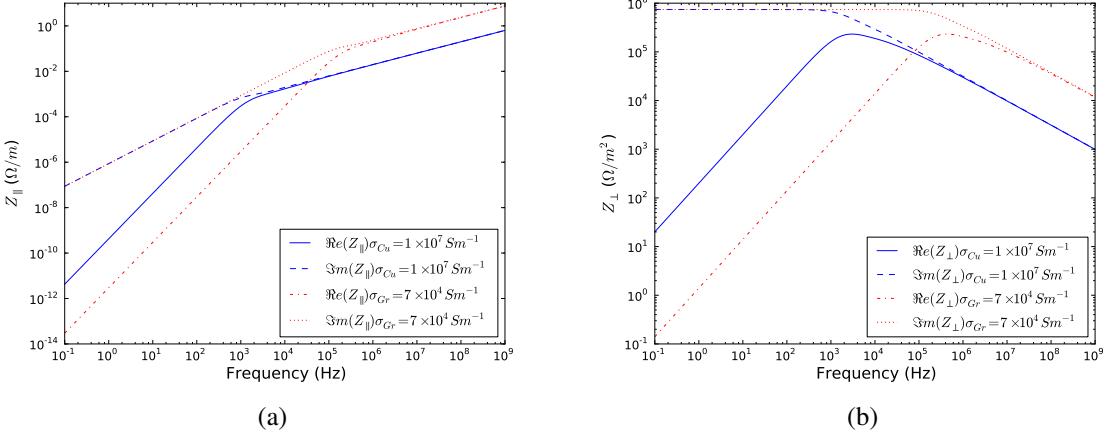


Figure 2.6: Examples of the longitudinal 2.6(a) and transverse 2.6(b) resistive wall impedance of a beam pipe of radius $a = 2\text{cm}$ made of both copper ($\sigma = 1 \times 10^7 \text{ Sm}^{-1}$) and graphite ($\sigma = 7 \times 10^4 \text{ Sm}^{-1}$).

$$\frac{Z_{\parallel}^0(\omega)}{L} = \frac{1 - \text{sgn}(\omega)i}{2\pi a \delta \sigma} \quad (2.39)$$

$$\frac{Z_{\perp}^1(\omega)}{L} = \frac{c}{\omega} \frac{1 - \text{sgn}(\omega)i}{2\pi a^3 \delta \sigma} \quad (2.40)$$

where sgn is a function that returns the sign (positive or negative) of the value. The 0 and 1 indicate these modes represent the zeroeth and first azimuthal modes of the source current. It can be easily seen is that the impedance is proportional to $1/\sqrt{\sigma}$, thereby indicating that materials with a higher conductivity generally give lower beam coupling impedance in the thick wall regime (see Fig. 2.6 for a comparison between two sample materials).

2.3 Example of the Effects of Wakefields

To give context to the effects that wakefields have on both the beam and equipment within a particle accelerator, two types of wakefield/impedance driven phenomena are discussed here. The first, beam-induced heating, is an example of beam induced wakefields having an effect on the machine itself contributing to heat loads due to the energy lost by the beam and subsequently dissipated within the surrounding equipment. The second, beam

instabilities, covers a number of examples of instability mechanisms that may be driven by wakefields, in particular due to the harmonic nature of particle and beam behaviour in a circular accelerator.

2.3.1 Beam Induced Heating

Defining and Deriving Power Loss in Circular Accelerators

When a charged particle interacts with an impedance it losses energy to generate the resulting wakefield. This is called the parasitic loss, and is generally defined as [29, 36, ?]

$$\Delta E = -2\pi e^2 N_b \int_{-\infty}^{\infty} d\omega |\lambda(\omega)|^2 Z_{\parallel}(\omega) \quad (2.41)$$

where ΔE is the energy loss per pass per particle, e is the charge per particle, N_b is the bunch population, ω the angular frequency, λ the line density of the bunch and Z_{\parallel} the longitudinal impedance of the object being traversed.

Due to the decay of the wakefields induced by this energy loss, this energy must eventually be lost to the device causing the impedance (valid below the cutoff frequency of the machine beam pipe). Therefore we can assume that the energy loss from the particles is absorbed by the surrounding structure. Summing over all particles in a bunch we can therefore obtain a sum of the energy loss;

$$\Delta E_{bunch} = 2\pi (eN_b)^2 \int_{-\infty}^{\infty} d\omega |\lambda(\omega)|^2 Z_{\parallel}(\omega) \quad (2.42)$$

As often we must deal with machines storing multiple bunches, for these we simply multiply the energy loss per bunch by the number of stored bunches to acquire the total energy loss per passage;

$$\Delta E_{bunches} = 2\pi (eN_b)^2 n_{bunch} \int_{-\infty}^{\infty} d\omega |\lambda(\omega)|^2 Z_{\parallel}(\omega) \quad (2.43)$$

where n_{bunch} is the number of bunches in the machine. If we assume a revolution frequency f_{rev} we thus get a power loss of;

$$\begin{aligned}
P_{loss} &= \Delta E_{bunches} f_{rev} \\
&= 2\pi f_{rev} (eN_b)^2 n_{bunch} \int_{-\infty}^{\infty} d\omega |\lambda(\omega)|^2 Z_{\parallel}(\omega) \\
&= 2\pi f_{rev} (eN_b)^2 n_{bunch} \int_{-\infty}^{\infty} d\omega |\lambda(\omega)|^2 Z_{\parallel}(\omega) \\
&= 2\pi f_{rev} (eN_b)^2 n_{bunch} \int_{-\infty}^{\infty} d\omega |\lambda(\omega)|^2 (\Re e(Z_{\parallel}(\omega)) + \Im m Z_{\parallel}(\omega)). \quad (2.44)
\end{aligned}$$

As $\Re e(Z_{\parallel}(\omega))$ is an even function and $\Im m(Z_{\parallel}(\omega))$ is an odd function, we see that

$$P_{loss} = \omega_{rev} (eN_b)^2 n_{bunch} \int_0^{\infty} 2d\omega |\lambda(\omega)|^2 \Re e(Z_{\parallel}(\omega)). \quad (2.45)$$

Next we make a change of the variable of integration $\omega = n_{bunch}\omega_{rev}$;

$$P_{loss} = \omega_{rev} (eN_b)^2 n_{bunch}^2 \int_0^{\infty} 2d\omega_{rev} |\lambda(\omega_{rev} n_{bunch})|^2 \Re e(Z_{\parallel}(\omega_{rev} n_{bunch})). \quad (2.46)$$

We can subsequently change to a sum formalism to obtain

$$P_{loss} = (\omega_{rev} e N_b n_{bunch})^2 \sum_{p=0}^{\infty} (2 |\lambda(p\omega_0)|^2 \Re e(Z_{\parallel}(p\omega_0))) \quad (2.47)$$

where $\omega_0 = 2\pi f_0$, $f_0 = \frac{1}{\tau_b}$ and τ_b is the bunch spacing.

Longitudinal Beam Profiles

As shown by the derivations in Section 2.3.1, aside from the longitudinal impedance of the device under consideration the longitudinal profile of the circulating bunches also contributes to the power loss in the machine. In past works it has generally been assumed that bunches in accelerators have a Gaussian profile [37] (seen in Eqn. 2.48, where $4\sigma_z = t_b$, t_b is the bunch length) when approaching the analytical treatment of beam instabilities, both single-bunch and multi-bunch. Recent measurements of the power spectrum of particle beams, especially in the LHC [2] have shown characteristics that the Gaussian profile does not predict, for example the high frequency secondary peak as seen in Fig. 2.7. To

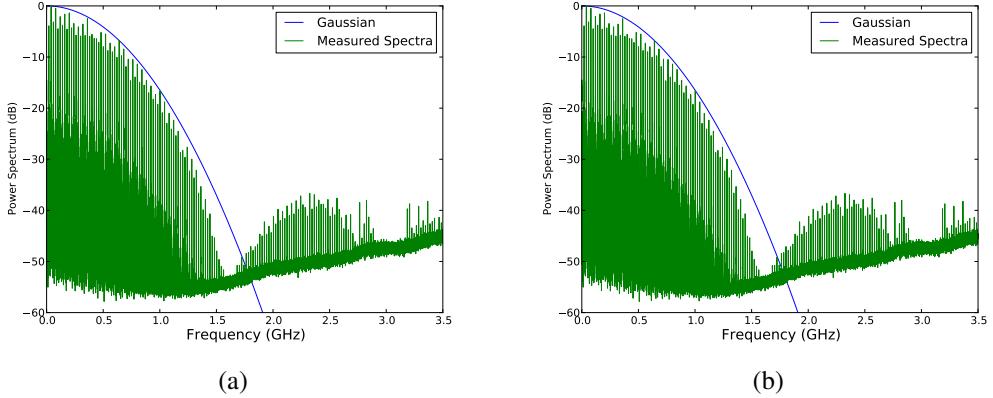


Figure 2.7: A comparison of 2.7(a) a measured beam power spectrum and a gaussian bunch of the same bunch length in the frequency domain and 2.7(b) the resulting time domain beam profile. The gaussian has a bunch length ($4\sigma_z = 1.2\text{ns}$). Measured spectrum taken by P. Baundrengien et al [2]

make more realistic predictions of heat loss due to beam impedance in the machine it is thus necessary to find bunch profiles which reproduce this behaviour.

$$\lambda(t) = e^{\frac{-t^2}{2\sigma^2}} \quad (2.48)$$

A number of different longitudinal bunch profiles have been investigated in the past. Here we shall look at 3 other bunch profiles; a parabolic line density (see Eqn. 2.49), \cos^2 (see Eqn. 2.50) and a water-bag (see Eqn. 2.51).

$$A(t) = \int_{-\infty}^{\infty} \lambda(\omega) e^{j\omega t} d\omega = \begin{cases} 1 - \left(\frac{2t}{t_b}\right)^2 & \text{if } |t/2| \leq t_b \\ 0 & \text{if } |t/2| > t_b \end{cases} \quad (2.49)$$

$$A(t) = \int_{-\infty}^{\infty} \lambda(\omega) e^{j\omega t} d\omega = \begin{cases} \cos^2\left(\frac{\pi t}{t_b}\right) & \text{if } |t/2| \leq t_b \\ 0 & \text{if } |t/2| > t_b \end{cases} \quad (2.50)$$

$$A(t) = \int_{-\infty}^{\infty} \lambda(\omega) e^{j\omega t} d\omega = \begin{cases} \sqrt{1 - \left(\frac{2t}{t_b}\right)^2} & \text{if } |t/2| \leq t_b \\ 0 & \text{if } |t/2| > t_b \end{cases} \quad (2.51)$$

The comparison of these bunch profiles in the time domain are shown in Fig. 2.3.1. Note all bunch currents are normalised to their peak value. The corresponding current

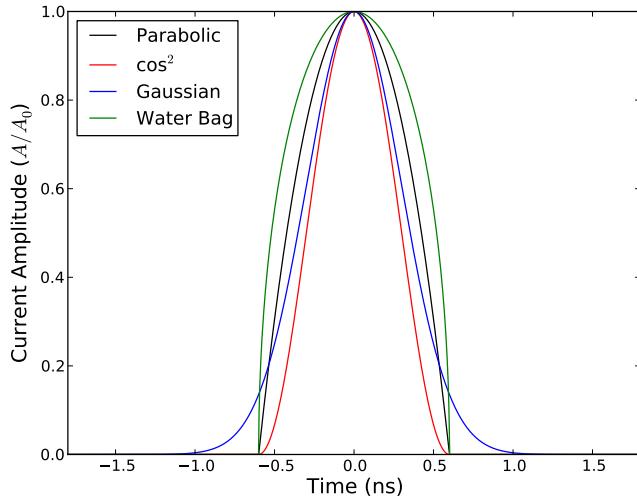


Figure 2.8: The longitudinal bunch profile of a number of bunch distributions. Note that all of these are normalised to have a peak bunch current of 1. For the gaussian distribution the bunch length is the 4σ value. The bunch length $\tau_b = 1.2\text{ns}$

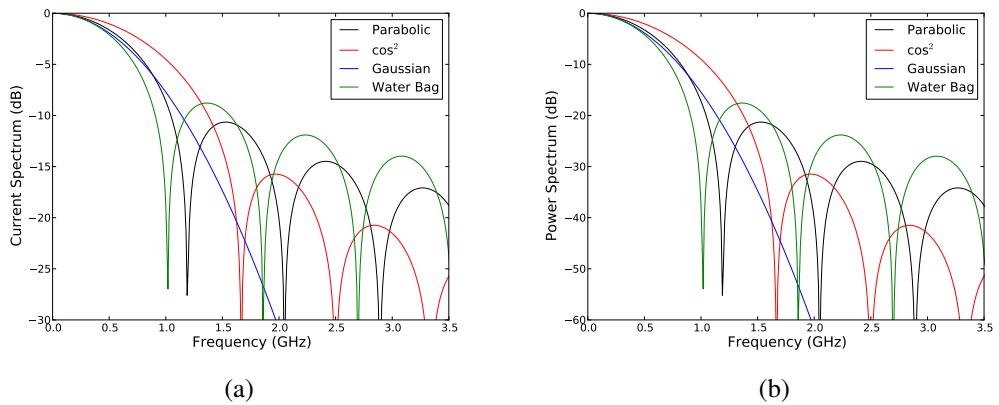


Figure 2.9: The frequency domain 2.9(a) current spectrum and 2.9(b) power spectrum for a number of different bunch profiles with a bunch length $\tau_b = 1.2\text{ns}$.

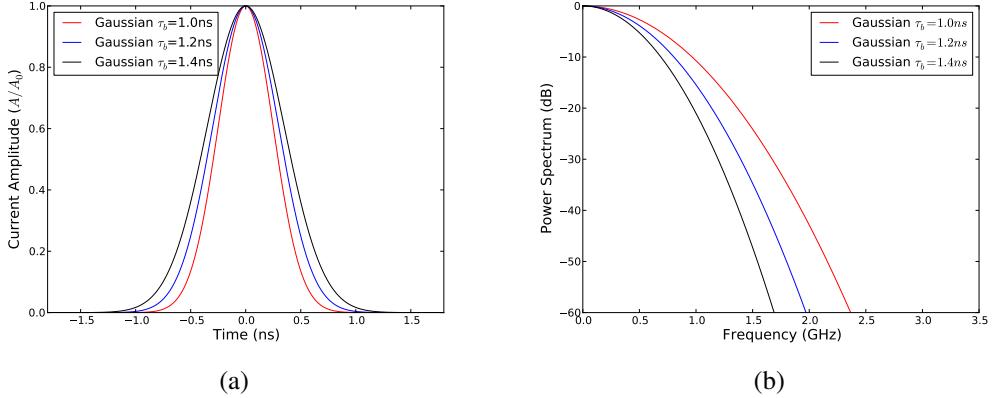


Figure 2.10: 2.10(a) The longitudinal profile and the 2.10(b) associated bunch power spectrum for a number of bunch lengths assuming a gaussian bunch profile.

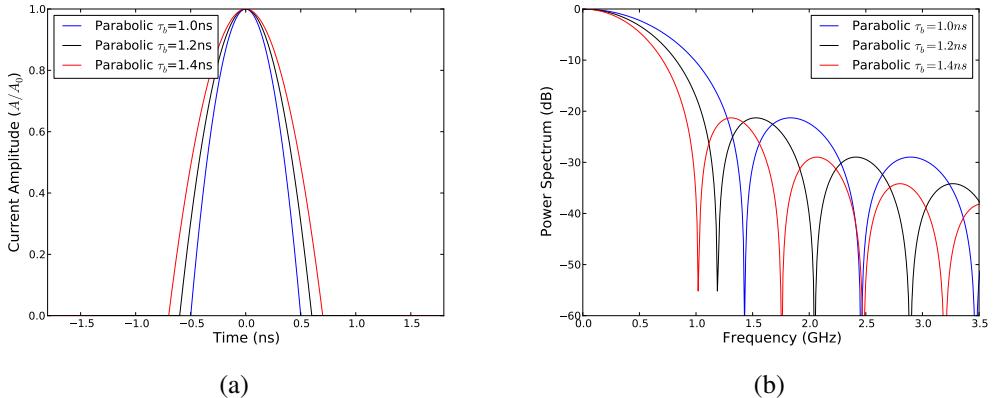


Figure 2.11: 2.11(a) The longitudinal profile and the 2.11(b) associated bunch power spectrum for a number of bunch lengths assuming a parabolic bunch profile.

and power spectra are shown in Fig. 2.9. There are several things to note about these spectra; firstly that the non-infinite distribution of the non-gaussian bunch profiles gives rise to a number of high frequency lobes in the power spectrum, and secondly the interval of these nodes depends heavily on the bunch profile.

To illustrate more clearly the effect of changing the bunch length on the power spectrum, a number of bunch profiles and the corresponding power spectra with different bunch lengths are shown in Fig 2.10. Firstly, consider a gaussian bunch profile. It can be seen in Fig. 2.10 that by increasing the bunch length that the magnitude at high frequencies is decreased quite substantially. If we consider a finite bunch profile (non-gaussian), we note that we have high frequency lobes. The peak frequency of these lobes depends

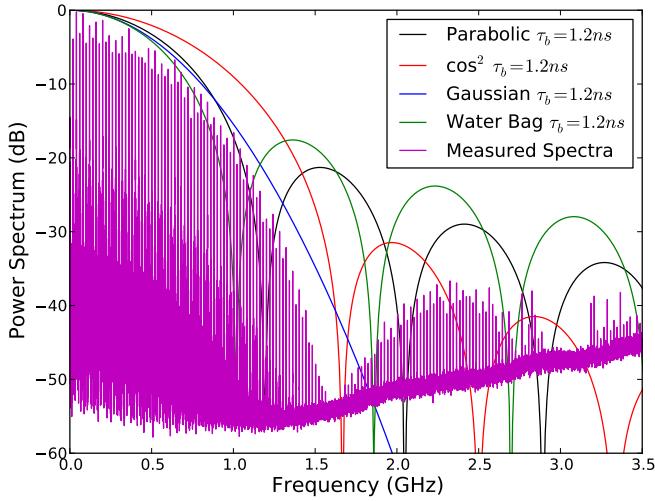


Figure 2.12: A comparison of a measured beam power spectrum and a number of analytical bunch profiles assuming a bunch length of 1.2ns.

on the bunch length, as illustrated using a parabolic bunch profile for bunch lengths $\tau_b = 1\text{ns}, 1.2\text{ns}, 1.4\text{ns}$ in Fig. 2.11. As the bunch length is increased the lobes move to lower frequencies, and the width of the first branch decreases. Similar behaviour is observed with the \cos^2 and water-bag bunch profiles.

Finally, a comparison of a measured bunch power spectra and the analytical power spectra is shown in Fig. 2.12. It can be seen that whilst it is possible to replicate some of the properties of the measured spectrum, an exact replication is non-trivial. Further investigation into the appropriate bunch profile is ongoing.

Beam induced heating due to a low Q impedance

For an impedance with a characteristic Q that is small ($Q < 10$), it can be seen that the impedance peak will interact substantially with a number of beam harmonics (see Fig. 2.13) due to the broad frequency range it occupies.

Further investigation of the longitudinal beam spectrum reveals that there is significant structure between the major harmonics (which are due to the bunch spacing of the beam) which can be attributed to the other time structures of the beam, for example the bunch

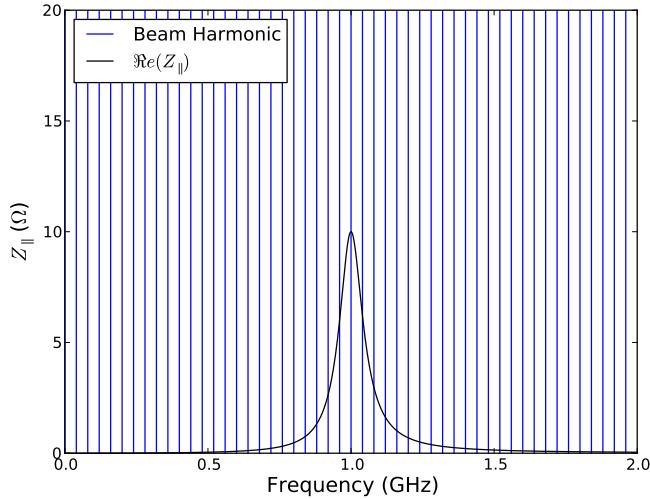


Figure 2.13: The beam harmonics of a beam with a bunch spacing of 25ns overlayed on the real component of the longitudinal impedance an example of a low Q impedance ($R_s = 10\omega$, $Q = 10$, $f_{res} = 1GHz$). The blue lines represent the frequency of a beam harmonic, not necessarily the magnitude of the power spectrum at that point. Note that a number of beam harmonics overlay non-zero impedance values.

train spacing, or the interval between the pilot bunch train and the subsequent bunch train. As such the treatment of the estimation of beam losses requires a broad spectrum approach. If we consider Eqn. 2.45 we see that we can treat the power losses in an integral form. We can observe a number of properties using this assumption. The power loss is proportional to the beam properties in the following manner:

1. $P_{loss} \propto N^2$
2. $P_{loss} \propto n_{bunch}$

Beam induced heating due to a high Q impedance

In contrast to the overlap of the beam spectrum with a low Q impedance, for a high Q impedance only one beam harmonic lies upon the resulting impedance to any significant quantity. This is illustrated in Fig 2.14 If we consider Eqn 2.47 and consider the situation where

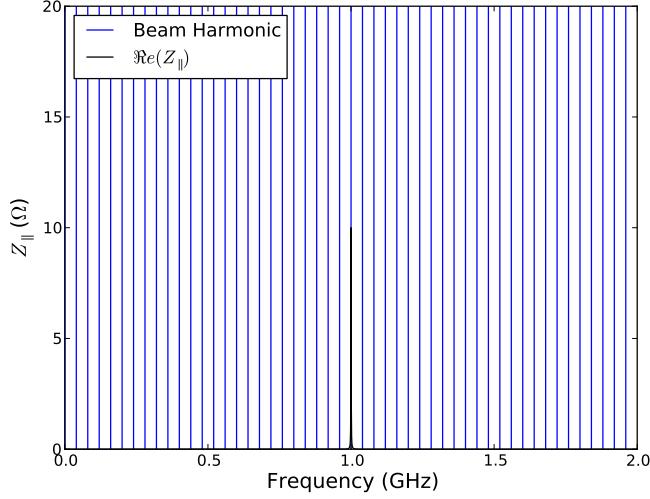


Figure 2.14: The beam harmonics of a beam with a bunch spacing of 25ns overlayed on the real component of the longitudinal impedance an example of a high Q impedance ($R_s = 10\omega$, $Q = 1000$, $f_{res} = 1GHz$). The blue lines represent the frequency of a beam harmonic, not necessarily the magnitude of the power spectrum at that point. Note that only a single beam harmonic overlays a non-zero impedance values.

$$(2 |\lambda(p\omega_{rev}n_{bunch})|^2 \Re e(Z_{||}(p\omega_{rev}n_{bunch}))) = \begin{cases} (2 |\lambda(\omega_{res})|^2 \Re e(Z_{||}(\omega_{res}))) & \text{if } p\omega_{rev}n_{bunch} = \omega_{res} \\ 0 & \text{if } p\omega_{rev}n_{bunch} \neq \omega_{res} \end{cases} \quad (2.52)$$

It can then be seen that Eqn 2.47 simplifies to

$$P_{loss} = (\omega_{rev}eN_bn_{bunch})^2 (2 |\lambda(\omega_{res})|^2 \Re e(Z_{||}(\omega_{res}))) . \quad (2.53)$$

The following properties can subsequently be seen as a result:

1. $P_{loss} \propto N^2$
2. $P_{loss} \propto n_{bunch}^2$, provided that the resonant frequency of the resonance continues to coincide with a beam harmonic.

Some Examples of the Beam-Induced Heating

In this section we shall illustrate some important factors that have been covered in previous sections. In particular, the interaction of different bunch profiles at different bunch lengths with an example cavity resonance will be covered in some detail to illustrate how the estimated heating can change drastically depending on higher frequency lobes in the beam current spectrum. In addition, the heating due to two particle beams in the same vacuum chamber shall be briefly covered for interest.

The Effect of Bunch Length on Power Loss

As can be seen in Figs. 2.9 and Fig 2.11, the bunch profile and the bunch length can significantly alter the magnitude of the beam current at higher frequencies. To illustrate this, let us consider two resonant impedances, one broadband Z_{bb} and one narrow band Z_{nb} impedance, characterised by having a low- Q and a high- Q respectively. Both impedances shall have the same resonant shunt impedance $R_s = 100\Omega$. The broadband impedance shall have a $Q_{bb} = 1$, and the narrow band impedance $Q_{nb} = 1000$. The resonant frequency will be changed to illustrate effects in different regimes of the bunch length and of different bunch profiles.

We shall use the gaussian bunch profile and the \cos^2 bunch profile for these examples. The gaussian is useful to illustrate the effect of just changing the bunch length, and the \cos^2 due to the presence of a high frequency lobe in it's frequency domain current spectrum. The \cos^2 frequency domain current profile is given by

$$I(\omega) = \frac{\sin(\omega\tau_b/2)}{\omega\tau_b/2 [1 - (\omega\tau_b/2)^2]}. \quad (2.54)$$

First we shall consider a narrow band impedance which has a resonant frequency $\omega_0 = 2GHz$ which falls upon a beam harmonic such that $\omega_0 = n\omega_{rev}$, where n is an integer. It should be noted that for other cases the contribution of these sources of heating is negligible due to the small beam current at this frequency. There are two extreme cases; that of $\omega_0 \gg 1/\tau_b$, in which it can be seen that the current spectrum will be negligible

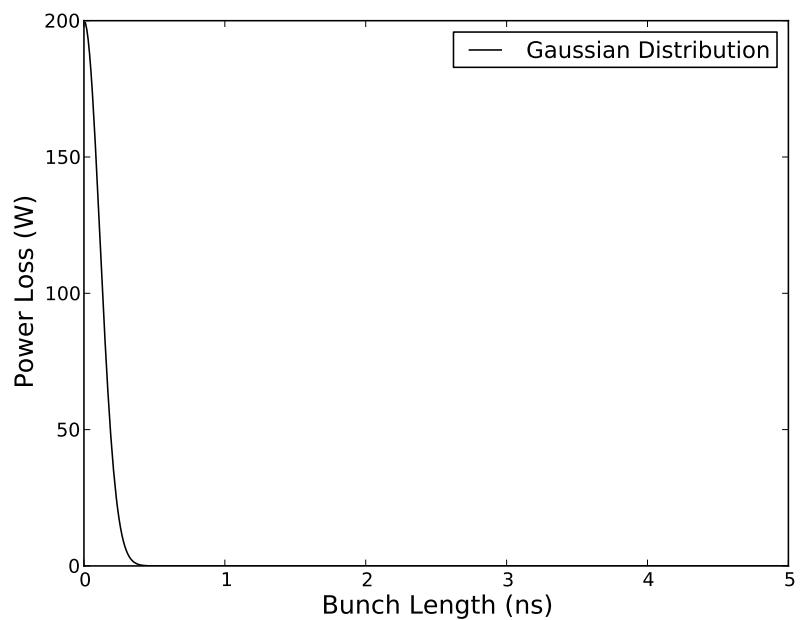


Figure 2.15: The change in power loss due to a narrow band resonance characterised by $\omega_0 = 2GHz$, $R_s = 100\Omega$, $Q = 1000$ with a gaussian bunch distribution of different lengths.

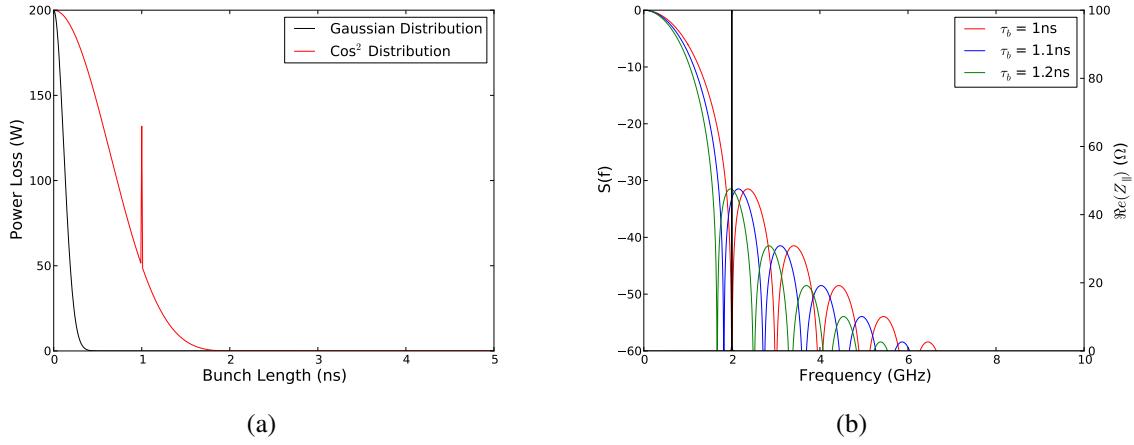


Figure 2.16: 2.16(a) The change in power loss due to a narrow band resonance characterised by $\omega_0 = 2\text{GHz}$, $R_s = 100\Omega$, $Q = 1000$ interacting with a \cos^2 bunch distribution with different bunch lengths. The impedance and the beam power spectrum are shown in 2.16(b) to illustrate how this relates to the power loss.

at the frequency of the impedance, and $\omega_0 \ll 1/\tau_b$ where the beam current spectrum is essentially the same as the DC spectral component. The transition in this intervening regime is shown in Fig 2.15, assuming a bunch current of 1A. It can be seen that in this case the heating falls drastically as the bunch length increases.

If we instead consider a \cos^2 distribution we instead see the effect of the secondary lobes in the beam current spectrum. The power loss with bunch length is shown in Fig. 2.15 in comparison to that of the gaussian profile. The beam power spectrum for a number of different bunch lengths are shown with the real component of the longitudinal impedance in Fig. 2.16(b). Here it can be clearly seen that the intersection of the secondary lobe with the resonant impedance causes a peak in the power lost by the beam, highlighting the neccessity to be aware of the frequencies of resonant impedances with relation to the beam harmonics.

For the broadband heating we shall consider a resonant impedance defined by the following parameters, $\omega_0 = 2\text{GHz}$, $Q = 1$, $R_s = 100\Omega$. To account for the multiple beam harmonics that will interact with the resonance, it is assumed that the beam harmonics in this case occur at 20MHz intervals. The impedance and the beam power spectrum is shown in Fig. 2.17(a) and the resulting power loss in Fig. 2.17(b) where it can be seen

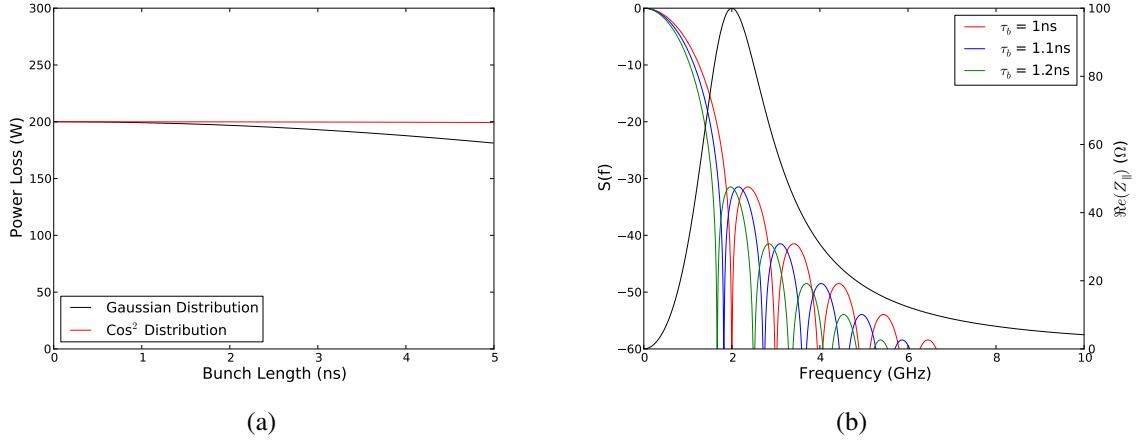


Figure 2.17: 2.17(a) The change in power loss due to a narrow band resonance characterised by $\omega_0 = 2\text{GHz}$, $R_s = 100\Omega$, $Q = 1$ interacting with a \cos^2 bunch distribution with different bunch lengths. The impedance and the beam power spectrum are shown in 2.17(b) to illustrate how this relates to the power loss.

that the power loss decreases slowly with increasing bunch length. This is due to the significant contribution to the power loss at low frequencies, in which the component of the beam power spectrum decreases only marginally due to the decreasing bunch length.

Beam-Induced Heating due to two traversing beams

Previous work [38] has investigated the effect of two beams in a vacuum on the beam-induced heating. This is restated here for the sake of completeness.

To begin, consider the two currents $I_{b1} = I_0 e^{i\phi_1}$ and $I_{b2} = -I_0 e^{i\phi_2}$ representing two counter rotating beams. I_0 represents the beam current, and $\phi_{1/2}$ the phase of beam 1 and beam 2 respectively. Each beam also sees a separate potential when it traverses the impedance, given by $V_{b1} = \int_{b1} E_z e^{i\omega_0 z/c} dz$ and $V_{b2} = \int_{b2} E_z e^{i\omega_0 z/c} dz$ respectively. By Ohms law it can then be seen that

$$\begin{pmatrix} V_{b1} \\ V_{b2} \end{pmatrix} = \begin{bmatrix} Z_{11} & Z_{12} \\ Z_{21} & Z_{22} \end{bmatrix} \begin{pmatrix} I_{b1} \\ I_{b2} \end{pmatrix}. \quad (2.55)$$

The power loss due to both beams can then be seen to be

$$P_{loss} = \begin{pmatrix} V_{b1} & V_{b2} \end{pmatrix} \begin{pmatrix} I_{b1} \\ I_{b2} \end{pmatrix}^*. \quad (2.56)$$

In the worst case scenario, the values of the impedance matrix are real, and are equal in value to the peak values of the resonant impedance

$$Z_{11} = 2R_s^{b1}; Z_{22} = 2R_s^{b2}; Z_{12} = Z_{21} = 2\sqrt{R_s^{b1}R_s^{b2}}. \quad (2.57)$$

The power loss then becomes

$$P_{loss} = I_0^2 2 \left(R_s^{b1} + R_s^{b2} - 2\sqrt{R_s^{b1}R_s^{b2}} \cos(\delta\phi) \right) \quad (2.58)$$

where $\delta\phi = \phi_1 - \phi_2$ is the phase difference between beam 1 and beam 2. This can be found relatively easily by comparing the distance δs from a collision IP (location of experiments in the LHC) of the machine. Assuming the beams are ultrarelativistic $\delta\phi = \omega_{rev} 2\delta s/c$. It can then be seen that the last term may either reduce or increase the power loss depending on whether $\cos(\delta\phi) = 1$ or $\cos(\delta\phi) = -1$ respectively.

2.3.2 Beam Instabilities

Beam Instabilities is the collective term for a various group of mechanisms which contribute to the degradation of beam properties during the circulation of a beam within a synchrotron. These can typically be into a number of different subgroups, summarised below:

1. Coherent Effects - Occuring due to the bulk oscillation of the bunch(es)
2. Incoherent Effects - Occuring due to a mechanism that effects particles dependent on their position within in the bunch
3. Single-Bunch - Occuring only on the scale of a single bunch
4. Multi-Bunch - Occuring due to coupling of the motion between multiple bunches.

The mechanisms driving these instabilities are multitudinous and of which beam coupling impedance is just one. Others include space charge effects (both direct and indirect) [39, 40], beam-beam interactions [41], electron cloud [42], intrabeam scattering [43, 44] amongst others. Here we shall give a brief overview of how these effects cause a degradation in beam operation.

Tune Shift and Tune Spread

As seen in Sec. 1.4.1, the transverse equation of motion can be viewed as an oscillatory system. If the particles experience an additional force F_x^{pert} due to an external mechanism, not due to the machine optics, its equation of motion (in the horizontal plane, for example) can be written as

$$\frac{d^2x}{ds^2} + \left(\frac{Q_{0,x}}{R}\right)^2 x = \frac{F_x^{pert}}{\beta^2 E_{total}}. \quad (2.59)$$

This subsequently leads to a perturbed oscillation frequency, characterised by the equation

$$\frac{d^2x}{ds^2} + \left(\frac{Q_{0,x} + \Delta Q_{pert,x}}{R}\right)^2 x = 0. \quad (2.60)$$

where $\Delta Q_{pert,x}$ is the part of the betatron frequency caused by the perturbing force. The perturbed tune may also be subsequently be further divided into coherent (the motion of the bunch centroid) and incoherent (motion of individual particles), such that $\Delta Q_{pert,x} = \Delta Q_{pert,x}^{coh} + \Delta Q_{pert,x}^{incoh}$. This separation leads to the creation of a tune spread in a machine, in which the tune of the beam covers an area of the tune diagram as shown in Fig. 2.18. In this case particles may be lost when this tune shift causes them to lie upon a major resonance of the beam optics, thereby causing coherent oscillation growth and ultimately particle loss. This leads to negative effects such as emittance growth and lower beam lifetimes.

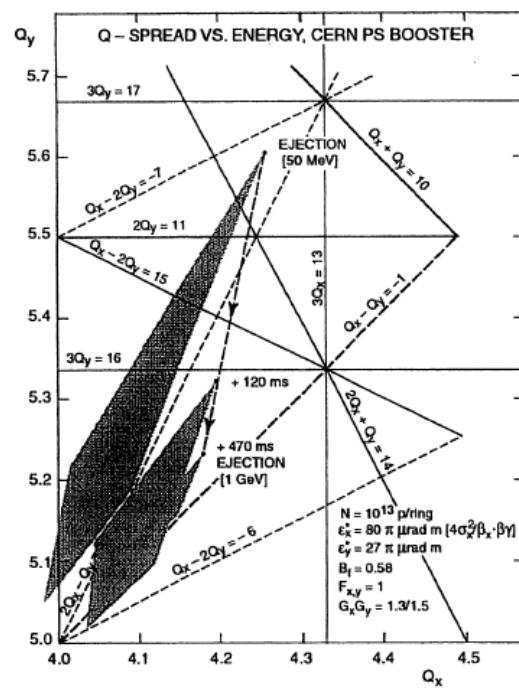


Figure 2.18: A tune diagram illustrating the unperturbed tune of a machine, and the resulting perturbed tune and the tune spread as a result of an impedance source. Note that the tune spread has caused some particles to lie upon a major resonance harmonic. Taken from K. Schindl [3].

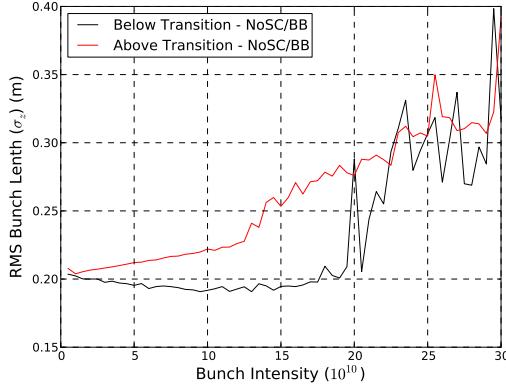


Figure 2.19: The change in the bunch length of a proton beam in an SPS like machine due to the effects of a broadband resonator impedance ($f_{res} = 1\text{GHz}$, $R_s = 10\Omega$, $Q = 1$). Note that the bunch length increases when the beam is above transition, and decreases below transition, as the bunch intensity is increased.

Longitudinal Single Bunch Instabilities

Similar to the change in the equations of motion for transverse particles, considering the induced fields in the longitudinal plane produces a perturbation in the longitudinal motion also. This can be thought of as an additional force alongside the electromagnetic force applied by the accelerating cavities, leading to two interesting phenomenon. These are potential well distortion, occurring at bunch intensities below some stability criteria, and longitudinal mode coupling instability (LMCI) above some stability criteria.

The potential well distortion is a direct effect of the incoherent synchrotron tune shift (again, similar in nature to the tune shifts experienced in the transverse plane), which is responsible for a growth in the stable emittance of the bunch. This reveals itself from measurements by a change in the bunch length with increasing bunch intensity, as shown in Fig. 2.19. It should be noted that, depending on the source of impedance, the bunch length may increase or decrease depending on whether the bunch is above or below the transition energy of the accelerator.

LMCI occurs when a certain intensity threshold is crossed in the accelerator, leading to a regime known as *turbulent bunch lengthening*. In this mechanism the eigenfrequencies of the natural modes of oscillation of the particles within the RF bucket are shifted due to

the changing potential resulting from the induced wakefield. In high intensity bunches two neighbouring modes may have their frequencies shifted to such an extent that the modes merge into one, thus leading to a case where the modes no longer have only a damped solution, but also a exponentially growing solution. This subsequently leads to the bunch oscillations becoming unstable.

Transverse Single Bunch Instabilities

In the transverse plane a number of instability mechanisms apply, which maybe seperated into two forms, those that occur on a time scale much shorter than the synchrotron period, and those that occur on a longer time scale than the synchrotron period. In both cases the leading particles of the bunch, often called the head of the bunch, drives an oscillation in the end, or tails of the bunch. This gives these instabilities their names, the fast head-tail instability, or transverse mode coupling instability (TMCI) and the head-tail instability.

In the case of the fast head-tail instability, there are a number of transverse oscillation modes (see Fig. 2.20 for examples), which as with the LMCI experience some frequency shift due to the presence of a wakefield. If the shift is large enough, two of these modes may again couple together, causing an exponential growth of the transverse size of the bunch to occur.

In the case of the head-tail instability, the movement of a particle from the head of the bunch to the tail and vice versa become important in determining the rate of growth of any unstable modes, and whether any stabilisation mechanisms have sufficient time to damp the growth. This means that the chromaticity of the beam now takes on a great importance, as this relates the betatron tune to the longitudinal motion. This leaves the option of changing the chromaticity of the beam to act as an additional stability mechanism.

Coupled Bunch Instabilities

In addition to single bunch instabilities, it is possible in machines where multiple bunches circulate, and possessing wakefields that do not damp in the spacing between bunches (typically caused by high Q resonant impedances), that the motion of the bunch centroids

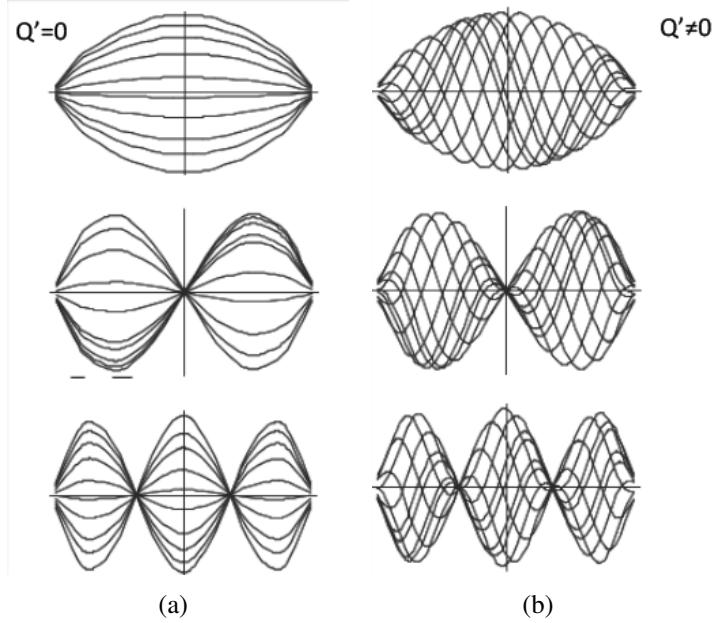


Figure 2.20: Examples of a number of modes of headtail oscillations without 2.20(a) and with 2.20(b) chromaticity. Note that radial and azimuthal modes may occur, as may coupled modes in which the motion of the horizontal and vertical planes is coupled. Images courtesy of G. Rumolo [4].

themselves may become coupled together, thus driving what are called coupled bunch instabilities (TCBI for the transverse plane, LCBI for the longitudinal plane).

This can be understood by imagining the bunch train as possessing M bunches. This train will then have M possible modes of oscillation with a characteristic frequency of ω_M , which may be driven by an impedance at some frequency ω_0 . If $\omega_0 \approx n\omega_M$ where n is an integer, then the wakefield due to the impedance may drive the oscillation either in a damped fashion (wakefield is out of phase with the oscillation of the mode) or an anti-damped fashion (wakefield is in phase with the oscillation of the mode). In the latter case, this driven oscillation may cause particle losses unless the oscillation is damped via an external mechanism, such as Landau damping or the use of a damper. This motion can occur in both the longitudinal and transverse planes of motion.

Chapter 3

Beam Based Measurements of Beam Coupling Impedance

3.1 Longitudinal Beam Impedance Measurements

- Include here a brief introduction to longitudinal motion.

3.1.1 Potential Well Distortion with Bunch Intensity

The equation for the longitudinal motion of a charged particle in an RF bucket can be linearised and solved to find the so called incoherent synchrotron frequency, that is it's oscillation in energy and phase, given by,

$$\omega_s = \frac{\omega_{RF}}{\beta} \left(\frac{\eta V_T \cos \bar{\phi}}{2\phi E/e} \right)^{\frac{1}{2}} \quad (3.1)$$

where $\omega_{RF} = h\omega_0$ is the RF frequency, ω_0 is the revolution frequency, h is the harmonic number of the RF, $\eta = \alpha_c - \gamma^{-2}$ is the slip factor, $\alpha_c = \gamma_t^{-2}$ is the momentum compaction factor, γ_t is the transition energy gamma factor, $E = \gamma E_0$ is the total particle energy, E_0 is the rest energy of the particle, $\bar{\phi}$ is the stable phase angle and V_T is the total voltage seen by the beam. For an empty bucket (i.e. no particles present) the voltage present is just that of the RF voltage V_{RF} , giving an associated synchrotron frequency

ω_{s0} . We can subsequently see from Eqn. 3.1 that we have the ratio

$$V_T = V_{RF} \left(\frac{\omega_s}{\omega_{s0}} \right)^2. \quad (3.2)$$

Additionally the bunch length L and the energy spread of the bunch $\Delta E/E$ can be shown to be related by

$$L = \frac{|\eta| c \Delta E}{\beta \omega_s \frac{E}{E}} \quad (3.3)$$

within the linear approximation. If we assume that the emittance of the bunch is preserved (usually the case in a proton machine), i.e. $L\Delta E = constant$, Eqn. 3.2 leads to

$$L^2 \omega_s = L_0^2 \omega_{s0}. \quad (3.4)$$

The resulting induced voltage of the bunch depends heavily on the nature of the impedance on which the beam interacts with. In this case we shall illustrate the characteristics of the bunch lengthening with a simple inductive impedance ($Z = j\omega L$). The voltage induced by a bunch with a parabolic line density over a purely inductive impedance, results in a synchrotron frequency given by

$$\omega_s^2 = \omega_{s0}^2 \left[1 - \frac{C}{B^3} \frac{I_b}{hV_{RF} \cos \bar{\phi}} \left(\left| \frac{Z}{n} \right| - \frac{gZ_0}{2\beta\gamma^2} \right) \right] \quad (3.5)$$

where $c = \frac{3}{\pi^2}$ is a constant dependent on the bunch profile, $B = \frac{L}{\pi R}$ is the bunching factor, given by the ratio of the bunch length to the machine half-circumference, I_b is the bunch current, $g = 1 + 2\ln(\frac{b}{a})$ is the direct space charge factor, b is the beam pipe radius, a is the beam radius and Z_0 (377Ω) is the impedance of free space.

If we consider an ultrarelativistic beam ($\gamma \rightarrow 1$), the space charge factor $g = 0$. Then, considering the value of $\bar{\phi}$ (i.e. whether the bunch is above transition $\cos \bar{\phi} > 0$, or below transition $\cos \bar{\phi} < 0$), the bunch length increases with the larger bunch current above transition, and decreases below transition. All variables other than Z/n may be measured directly using various instrumentation.

Generalisation of this method to a general complex impedance shows that it is the imaginary component of the longitudinal impedance that contributes to the induced voltage, thus being the component of the impedance measured using this method.

3.1.2 Synchronous Phase Shift

As discussed in Sec. 2.3.1, a particle circulating in circular accelerator losses energy due to interacting with impedances in the machine. If the particle is not undergoing acceleration, it can be seen that to keep the same energy, the particle must have a phase relative to the RF that ensures that the energy losses due to wakefields are equal to the energy gained during the traversal of the RF cavities, given by the equivalence of the energy gain by transit and the energy loss by traversal,

$$U = qeV \sin\phi \quad (3.6)$$

where U is the total energy lost by a particle per turn, q is the unit charge, e is the electron charge, V is the RF voltage amplitude and ϕ is the synchronous phase. The total energy lost is the sum of all energy losses in the machine, given by

$$U = -e^2 N_b k \quad (3.7)$$

$$= -e^2 N_b \sum_n k_n \quad (3.8)$$

$$= -e^2 N_b \sum_n \Re e (Z_{\parallel,n} (\omega)) |\lambda (\omega)|^2 d\omega \quad (3.9)$$

where k_n is the kick factor of device n in the accelerator and $Z_{\parallel,n}$ is the longitudinal impedance of device n . It can be seen that this allows the measurement of the impedance of the whole device. In addition where the movement of a device is permissible and can be carried out during operation (in collimation systems or insertion devices for example) it is possible to determine the impedance of specific devices by the change in their contribution to the total kick factor. Examples of this measurement method can be found in [45, 46]

3.2 Transverse Beam Impedance Measurements

For a bunch interacting with a transverse impedance there are two commonly used methods of measuring the transverse impedance - the variance of the coherent betatron tune shift with bunch intensity and the change of growth/decay rate of head-tail instabilities with the chromaticity of the beam [47].

When a bunch is exposed to a transverse impedance Z_{\perp} , it undergoes a complex frequency shift in in betatron frequency

$$\Delta\omega_{\beta} = \frac{N_p e c}{4\sqrt{\pi}\omega_{\beta}(E/e)T_0\sigma_t} i(Z_{\perp})_{eff} \quad (3.10)$$

where N_p is the number of particles in the bunch, E is the energy, T_0 is the revolution frequency, $\sigma_t = \sigma_z/c$ is the bunch length, $\omega_{\beta} = 2\pi Q f_{rev}$ is the betatron frequency and $(Z_{\perp})_{eff}$ is the effective transverse impedance. This is given by the impedance convolved with a weighting function h which is determined by the longitudinal bunch profile given by

$$(Z_{\perp})_{eff}(\omega_{\xi}) = \int_{-\infty}^{\infty} Z_{\perp}(\omega) h_m(\omega - \omega_{\xi}) d\omega. \quad (3.11)$$

As an example, for the 0-mode coherent bunch oscillation and assuming a gaussian bunch profile the weighting function can be written as

$$h_0(\omega) = \frac{\sigma_t}{\sqrt{\pi}} e^{(\omega\sigma_t)^2}. \quad (3.12)$$

It can be seen from Eqn. 3.12 that the function is centred on ω_{ξ} which is dependent on the chromaticity ξ and the phase slip factor η as

$$\omega_{\xi} = \xi \frac{\omega_{\beta}}{\eta}. \quad (3.13)$$

Eqn 3.10 indicates that the imaginary component of the effective transverse impedance contributes to a real coherent tune shift, and the real component to an imaginary tune shift, visible as a growth/decay time in the oscillation. For a broadband impedance ($Q = 1$), at low frequencies it is possible to assume that $\Im m(Z_{\perp}) \approx const.$ It then follows that

this is directly proportional to the real tune shift which can be obtained by measuring the coherent tune as a function of bunch intensity.

3.2.1 Tune shift change with bunch intensity

The real component of the solution to Eqn 3.10 can be related to the integer betatron tune by

$$\Delta Q = \frac{\Omega - \omega_\beta}{\omega_0} \approx \frac{1}{\omega_0} \frac{N_p e c^2}{4\sqrt{\pi} \omega_\beta (E/e) T_0 \sigma_t} \Im m(Z_\perp)_{eff}, \quad (3.14)$$

where Ω is the measured betatron frequency. It can easily be seen that by altering the bunch population the tune shift ΔQ can be measured also and subsequently the value for $\Im m(Z_\perp)$ can be obtained.

3.2.2 Growth time change with chromaticity

Similarly to the tune shift measurements, we consider the imaginary component of the solution. Similarly to a harmonic oscillator, the imaginary part of the solution denotes a damping time of the oscillation, τ , in this case given by

$$\frac{1}{\tau} = -T_0 \frac{N_p e c^2}{4\sqrt{\pi} \omega_\beta (E/e) T_0 \sigma_t} \Re e(Z_\perp)_{eff}. \quad (3.15)$$

$\Re e(Z_\perp)_{eff}$ is dependent only on the chromaticity ξ , being zero at $\xi = 0$ and different from zero for other values of chromaticity. Depending on whether the measurements are carried out above or below transition this produces either a damping for positive chromaticity above transition and growth below transition, and vice versa for negative chromaticity.

Chapter 4

Bench Top Measurements of Beam Coupling Impedance

Due to the sensitivity of the beam coupling impedance to the boundary conditions of the equipment used, it is necessary to utilise different measurement techniques to fully analyse the impedance of accelerator structures.

4.1 Low Q-factor Impedances

For structures that are expected to contain mostly low Q-resonances (i.e. resistive wall impedance) it is appropriate to use the coaxial wire method [48, 49], sometimes also called the stretched wire method. This method relies on the similarity of the electromagnetic field profile due to an ultrarelativistic charged particle and that of a short electrical pulse sent along a coaxial wire.

A moving charged particle produces an electromagnetic field in a arc transverse to its direction of motion, where the angle of the arc opening is proportional to the relativistic factor of the particle γ . For an ultrarelativistic particle ($\gamma \leftarrow \infty$), the field becomes entirely perpendicular to the direction of motion. If we place a conductive wire along the same path we would expect the charged particle to take (in most cases this is well represented by a straight wire), a short electrical pulse sent along this wire would propagate in

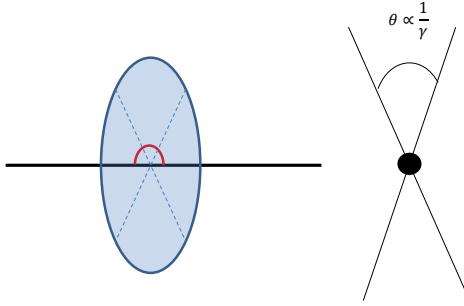


Figure 4.1: Comparison of the electromagnetic field profile of a moving charged particle and a short time pulse propagating along a coaxial wire.

the TEM (transverse electrical and magnetic field) mode, producing a field profile similar to that emitted by the ultrarelativistic charged particle (see. Fig. 4.1)

4.1.1 Classical Coaxial Wire Method

The classical coaxial wire method, first proposed in it's present form by V. Vaccarro in 1990 [49], is a transmission method that measures the complex transmission coefficient of a DUT (Device Under Test) made up of the equipment whose impedance is to be measured and a coaxial wire passing through it.

The experimental setup is as shown in Fig. 4.2. Firstly the external circuit (i.e. everything not the DUT) is matched to the characteristic impedance of the coaxial line inside the DUT. This is done by measuring the reflection coefficient Γ for the setup with only one port connected to the DUT and the other end terminated by an open connection. Knowing the characteristic impedance of the VNA and associated cables (typically $Z_0 = 50\Omega$), we can easily calculate the characteristic impedance, Z_c , from the relation,

$$\Gamma = \frac{Z_c - Z_0}{Z_c + Z_0}. \quad (4.1)$$

We then electrically match the characteristic impedance by adding resistors in series just before the DUT to resistively match the characteristic impedance of the VNA to that

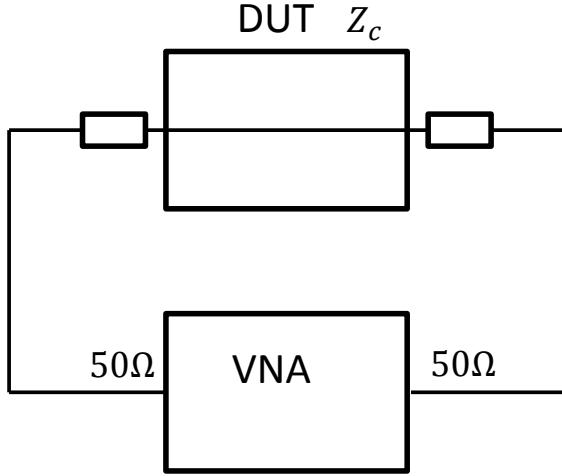


Figure 4.2: Experimental setup for a measurement of the beam coupling impedance using the classical coaxial wire method

of the DUT. It is possible to use physical matching also using transition cones but these are costly, time consuming to construct and require new cones for each piece of equipment measured. And as can be seen in Fig. 4.3, matching with a resistor is highly effective at removing the presence of reflections in coaxial measurements.

The value that we wish to measure to evaluate the beam coupling impedance of a device are the scattering parameters of the resulting circuit, in particular S_{21} , the normalised transmission parameter through the DUT. S_{21} is calculated by taking the measured transmission parameter $S_{21,DUT}$ and dividing it by the transmission parameter through a reference line of the same physical length as the DUT,

$$S_{21} = \frac{S_{21,DUT}}{S_{21,REF}} \quad (4.2)$$

The effect of this is to correct the measured phase change in the DUT to be that only caused by the imaginary component of the beam coupling impedance.

There are subsequently a number of ways to evaluate the beam coupling impedance of the DUT depending on its expected properties. For devices that are expected to have a either a small impedance, or those that are physically very short in length, it is possible



Figure 4.3: An example of a reflection measurement made with and without a matching resistor. The faded line is the measurement with matching, the bold line that without. The reduction in the reflection can be seen due to the flatter line after the initial reflection.

to use the so called lumped impedance formula [50, ?];

$$Z = 2Z_c \frac{1 - S_{21}}{S_{21}} \quad (4.3)$$

For distributed impedances, it is suitable to use the so called log formula (called so due to attenuation causing a log function to appear in the evaluation) [50, ?, 51],

$$Z = -2Z_c \ln(S_{21}) \quad (4.4)$$

For long components or measurements at very high frequencies there exists the improved log formula. This takes into account more completely the electrical length of the device, given by

$$Z = -2Z_c \ln(S_{21}) \left(1 + j \frac{\ln(S_{21})}{2\Theta} \right) \quad (4.5)$$

where $\Theta = 2\pi \frac{L}{\lambda}$ is the normalised electrical length of the device, L the length of the device, λ the wavelength of the frequency of measurement. It is possible to see that

the lumped impedance formula can be used when $\Theta \leq 1$, and the improved log formula becomes useful for $\Theta \geq 5$ [51].

4.1.2 Resonator Coaxial Wire Method

An alternative method for measuring the beam coupling impedance is by using the so called resonator method. The setup for this method is similar to that of the classical coaxial wire method, except that the matching resistor network between the VNA and DUT is replaced by a weak capacitive coupling ($S_{11} < 0.5dB$, remembering that $0dB$ means full reflection, i.e. no coupling) at both ends of the DUT. This then produces a structure which resonates at frequencies where the wavelength corresponds to the classical closed structure form,

$$\lambda = \frac{2L}{n} \quad (4.6)$$

where λ is the wavelength of the resonance, n the harmonic of the resonance and L the length of the device.

The resonant method enables accurate measurement of the transmission losses due to the real longitudinal impedance. Additional advantages are that no matching is required, and a large number of mechanical uncertainties (electrical connections, consistency of calibration) can be avoided. However it can be seen that the frequency resolution is limited due to the length of the DUT so the method is not recommended as the only measurement method for structures expected to contain high-Q, narrowband resonances. It can however be used to corroborate the results obtained using the classical method.

For each resonant peak, the loaded Q-factor and the frequency of the resonance are measured. For a weak coupling at both ends of the DUT, we can write the coupling coefficient k as

$$k = \frac{|S_{21}|}{1 - |S_{21}|}. \quad (4.7)$$

The difference between the unloaded Q -factor, Q_0 , and the loaded Q -factor, Q_L , is a

function of k . We can get an approximate correction by using the formula

$$Q_0 = Q_L (1 + k). \quad (4.8)$$

Subsequently the measured line attenuation (in Np/m) is then calculated

$$\alpha_m = \frac{\pi}{\lambda Q_0}. \quad (4.9)$$

Note that this attenuation includes both that from the beam coupling impedance as well as that due to the finite resistance of the wire material. We can estimate the attenuation due to the wire material as

$$\alpha_w = \sqrt{\pi \rho_w \epsilon f} \frac{1}{d \ln D/d} \quad (4.10)$$

where ρ_w is the wire resistivity, ϵ the permittivity, f the frequency, d the diameter of the inner conductor and D the diameter of the outer conductor (typically the vacuum beam pipe diameter). At very low frequencies the finite skin depth of the inner conductor would also have to be taken into account. Using the corrected attenuation $\alpha = \alpha_m - \alpha_w$, the real longitudinal impedance per unit length can be found to be

$$\Re \{Z\} = 2Z_c \alpha \quad (4.11)$$

It is more involved too calculate the imaginary impedance using the resonant method. In particular it is necessary to calculate the resonant frequencies of a pipe open at both ends of the same length of the DUT made of a good conducting material (i.e. the physical length is equal to the electrical length). This allows the comparison to the measured resonant frequencies of the DUT, the difference between which is dependent on the imaginary impedance.

If we consider the complex impedance of the two measurements, Z_{DUT} for the DUT and Z_{REF} for a perfectly conducting reference pipe, we can simplify them as

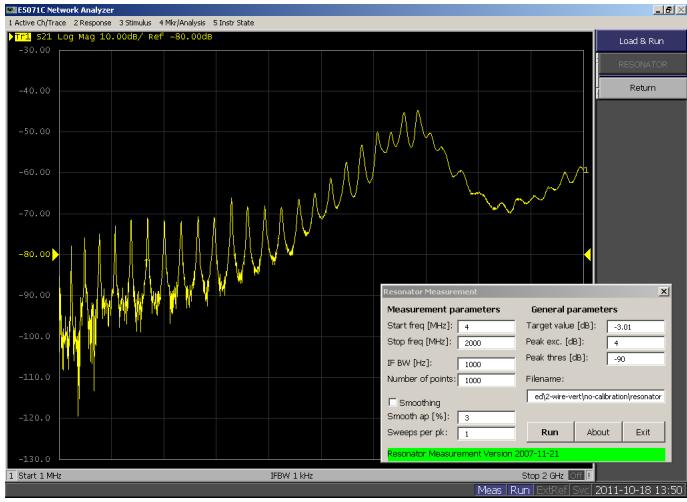


Figure 4.4: An example of the resonance pattern seen whilst performing measurements using the resonant method. Each peak corresponds to one data point in the final measurements. Taken from measurements of the LHC injection kicker magnets

$$Z_{DUT} = R + jX_1 = Z_1 e^{j\phi} \quad (4.12)$$

$$Z_{REF} = jX_2 = Z_2 e^{j\cdot 0} \quad (4.13)$$

where R is the resistive component of the DUT impedance, $X_{1/2}$ the imaginary component of the impedance (DUT and reference pipe respectively), ϕ is the angle of DUT impedance projected onto a complex plane and $Z_2 = \sqrt{R^2 + X^2}$. If we consider a measured value dependent on the impedance, for example the transmission parameter S_{21} at a resonant peak, we have the following relations

$$S_{21}^{DUT} = S_0 e^{j(\omega_1 t + \phi)} \quad (4.14)$$

$$S_{21}^{REF} = S_0 e^{k(\omega_2 t)} \quad (4.15)$$

where S_0 is some normalised scalar, $\omega_{1/2}$ is the frequency of the resonance and $t = \frac{L}{c}$.

Thus for a pair of corresponding peaks from resonance measurements for which we have measured ω_1 and ω_2 we can equate $S_{21}^{DUT} = S_{21}^{REF}$ and thus show

$$\phi = t(\omega_2 - \omega_1). \quad (4.16)$$

Subsequently we can see that

$$X = Z_{DUT} \sin\phi = R \frac{\sin\phi}{\cos\phi} = R \tan\phi \quad (4.17)$$

where $R = \Re e(Z)$.

4.1.3 Transverse Impedance Measurements

The above methods give a general impression of how to carry out coaxial wire measurements of the impedance of accelerator components. Directly applied as described they allow the measurement of the longitudinal impedance of a DUT. However, from a beam stability point of view, it is often more interesting to look at the transverse impedance of a device. In particular it would be useful to have a method of determining the vertical/horizontal dipolar (or driving) impedance and the vertical/horizontal quadrupolar (detuning) impedance of any device. In this section we describe how do this for structures with top/bottom, left/right symmetry and then generalise to asymmetric structures, with illustration from simple examples evaluated using simulations.

To allow a complete explanation of how to verify the methods of measuring transverse impedances, let us first consider the general form of the m -th order ($m = 0, 1, 2, \dots$) longitudinal beam coupling impedance, given by [29, 52]

$$\bar{Z}_m = \frac{-1}{I^2} \int dV \bar{\mathbf{E}}_m \cdot \bar{\mathbf{J}}_m^* \quad (4.18)$$

where \bar{J}_m is the current density of the source. For a beam propagating along the z-axis with an offset a and moment $\cos(m\theta)$,

$$\bar{\mathbf{J}}_m = \frac{I}{\pi a^{m+1} (1 + \delta_{m0})} \delta(r - a) \cos(m\theta) \exp(j(\omega t - kz)) \mathbf{e}_z. \quad (4.19)$$

The electromagnetic field associated with a given current source $\bar{\mathbf{J}}_m$ is $(\bar{\mathbf{E}}_m, \bar{\mathbf{H}}_m)$.

It can be seen that any different azimuthal components of the m -th field of order n (i.e. $\sin(n\theta)$ and $\cos(n\theta)$ terms) are neglected in this treatment. To allow the treatment of coupling between different azimuthal orders we can define a longitudinal beam coupling impedance $Z_{m,n}$ (where $m, n = 0, \pm 1, \pm 2, \dots$)

$$Z_{m,n} = \frac{-1}{I^2} \int dV \mathbf{E}_m \cdot \mathbf{J}_n^* \quad (4.20)$$

where

$$\mathbf{J}_m = \frac{I}{\pi a^{|m|+1}} \delta(r-a) \exp(jm\theta) \exp(j(\omega t - kz)) \mathbf{e}_z. \quad (4.21)$$

Importantly, this allows us to see that

$$\begin{aligned} \bar{\mathbf{J}}_0 &= \mathbf{J}_0 \\ \bar{\mathbf{J}}_m &= \mathbf{J}_m + \mathbf{J}_{-m}. \end{aligned} \quad (4.22)$$

From here we use the principle of superposition for electromagnetic fields (i.e. we neglect any non-linearities of the surrounding materials), and thus can derive

$$\bar{Z}_0 = Z_0 \quad (4.23)$$

$$\bar{Z}_x = \bar{Z}_1 = Z_{1,1} + Z_{1,-1} + Z_{-1,1} + Z_{-1,-1} = kZ_x^{dip} \quad (4.24)$$

$$\bar{Z}_x = \bar{Z}_1 (\cos replaced with \sin) = Z_{1,1} - Z_{1,-1} - Z_{-1,1} + Z_{-1,-1} = kZ_y^{dip} \quad (4.25)$$

$$\bar{Z}_m = Z_{m,m} + Z_{m,-m} + Z_{-m,m} + Z_{-m,-m}, m = 1, 2, \dots \quad (4.26)$$

From this start we will apply this two both two wire measurements and to displaced single wire measurements.

Two Wire Measurements

It is possible to directly measure the dipolar impedance of a device through the use of a two wire coaxial method. The measurement setup is identical to that of the single wire

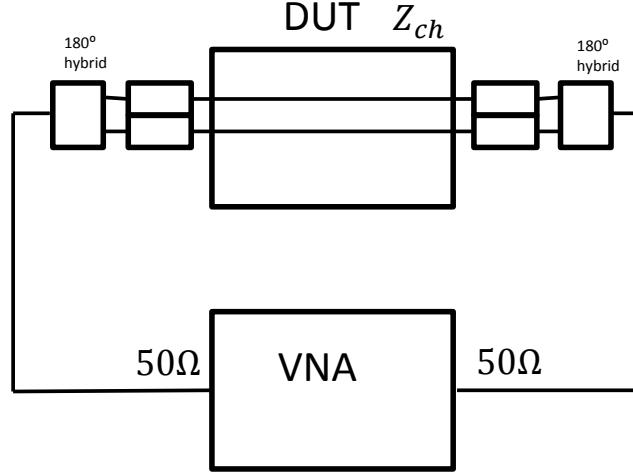


Figure 4.5: Measurement setup for measurements of the dipolar beam coupling impedance using the two wire setup for the classical coaxial wire method.

method, except that two wires, separated by distance Δ , are placed in the device, and a 180° hybrid is placed between the wires and the VNA at both ends of the device. This setup is illustrated in Fig. 4.1.3

The measurements are done in the same way as described in the previous sections for either the classical transmission method or the resonator method. When using the classical coaxial wire method, both wires are individually matched to Z_c . By using two wires each carrying a signal 180° out of phase with one another we produce a field pattern similar to a dipole and thus measure the dipole impedance in either the horizontal or vertical plane depending on the orientation of the two wires.

What is directly measured is the longitudinal impedance of just the dipole impedance, as is to be expected from the Panofsky-Wenzel theorem (see Chap. ?? for further explanation).

For two wires placed at positions $x = \pm a$, the current density is given by [52]

$$\begin{aligned}
J &= I (\delta(x - a) - \delta(x + a)) \delta(y) \exp(j(\omega t - kz)) \\
&= \frac{I}{\pi a} \sum_{m=-\infty}^{\infty} \exp(j(2m+1)\theta) \exp(j(\omega t - kz)) \\
&= 2 \sum_{m=-\infty}^{\infty} a^{|2m+1|} J_{2m+1}.
\end{aligned} \tag{4.27}$$

The impedance is then

$$\begin{aligned}
Z &= -\frac{1}{I^2} \int dV \left(2 \sum_{m=-\infty}^{\infty} a^{|2m+1|} E_{2m+1} \right) \left(2 \sum_{n=-\infty}^{\infty} a^{|2n+1|} J_{2n+1}^* \right) \\
&= 4 \sum_{m,n} a^{|2m+1|+|2n+1|} Z_{2m+1,2n+1} \\
&= (2a)^2 (Z_{1,1} + Z_{-1,1} + Z_{1,-1} + Z_{-1,-1}) + O(a^4) \\
&= (2a)^2 \bar{Z}_x + O(a^4).
\end{aligned} \tag{4.28}$$

Again using the Panofsky-Wenzel theorem we can deduce that the transverse dipolar impedance $Z_{x/y}^{dip}$ is given by

$$Z_{x/y}^{dip} = \frac{\bar{Z}_{x/y}}{k} = \frac{c}{\omega} \frac{Z}{\Delta^2} \tag{4.29}$$

where $\Delta = 2a$ and Z is the measured complex impedance.

Structures with Top/Bottom, Left/Right Symmetry

If we consider a source particle at $x_1 = a_1 \cos \theta_1, y_1 = a_1 \sin \theta_1$ and a test particle at $x_2 = a_2 \cos \theta_2, y_2 = a_2 \sin \theta_2$, the source current density is

$$\begin{aligned}
J_z &= I \delta(x - x_1) \delta(y - y_1) \exp(k(\omega t - kz)) \\
&= \sum_{m=-\infty}^{\infty} a_1^{|m|} \exp(-jm\theta_1) J_m
\end{aligned} \tag{4.30}$$

The impedance would therefore be

$$\begin{aligned}
Z &= \frac{-1}{I^2} \int dV \left(\sum_{m=-\infty}^{\infty} a_1^{|m|} \exp(jm\theta_1) E_m \right) \left(\sum_{n=-\infty}^{\infty} a_1^{|n|} \exp(jn\theta_2) J_n^* \right) \\
&= \sum_{m,n=-\infty}^{\infty} a_1^{|m|} a_2^{|n|} \exp(-jm\theta_1) \exp(-jn\theta_2) Z_{m,n} \\
&= Z_{0,0} + (x_1 - jy_1) Z_{1,0} + (x_1 + jy_1) Z_{-1,0} + (x_2 + jy_2) Z_{0,1} + (x_2 - jy_2) Z_{0,-1} \\
&\quad + (x_1 - jy_1)^2 Z_{2,0} + (x_1 - jy_1)(x_2 - jy_2) Z_{1,-1} + (x_2 - jy_2) Z_{0,-2} \\
&\quad + (x_1 - jy_1)(x_2 + jy_2) Z_{1,1} + (x_1 + jy_1)(x_2 - jy_2) Z_{-1,-1} \\
&\quad + (x_1 + jy_1)^2 Z_{-2,0} + (x_1 + jy_1)(x_2 - jy_2) Z_{-1,1} + (x_2 - jy_2)^2 Z_{0,2} \\
&\quad + O((x_1, y_1, x_2, y_2)^3). \tag{4.31}
\end{aligned}$$

By applying Panofsky-Wenzel we see

$$\begin{aligned}
kZ_x &= \frac{\partial Z}{\partial x_2} = Z_{0,1} + Z_{0,-1} + (x_1 - jy_1) Z_{1,-1} + 2(x_2 - jy_2) Z_{0,-2} \\
&\quad + (x_1 - jy_1) Z_{1,1} + (x_1 + jy_1) Z_{-1,-1} + (x_1 + jy_1) Z_{-1,1} + 2(x_2 + jy_2) Z_{0,2} \\
&\quad + O((x_1, y_1, x_2, y_2)^2) \\
&= Z_{0,1} + Z_{0,-1} + x_1 \bar{Z}_x + jy_1 (-Z_{1,-1} - Z_{1,1} + Z_{-1,-1} + Z_{-1,1}) \\
&\quad + x_2 (2Z_{0,-2} + 2Z_{0,2}) + jy_2 (-2Z_{0,-2} + 2Z_{0,2}) + O((x_1, y_1, x_2, y_2)^2) \tag{4.32}
\end{aligned}$$

$$\begin{aligned}
kZ_y &= \frac{\partial Z}{\partial y_2} = jZ_{0,1} - jZ_{0,-1} - j(x_1 - jy_1) Z_{1,-1} - 2j(x_2 - jy_2) Z_{0,-2} \\
&\quad + j(x_1 - jy_1) Z_{1,1} - j(x_1 + jy_1) Z_{-1,-1} + j(x_1 + jy_1) Z_{-1,1} + 2j(x_2 + jy_2) Z_{0,2} \\
&\quad + O((x_1, y_1, x_2, y_2)^2) \\
&= j(Z_{0,1} - Z_{0,-1}) + y_1 \bar{Z}_y + jx_1 (-Z_{1,-1} + Z_{1,1} + Z_{-1,-1} + Z_{-1,1}) \\
&\quad + y_2 (-2Z_{0,-2} - 2Z_{0,2}) + jx_2 (-2Z_{0,-2} + 2Z_{0,2}) + O((x_1, y_1, x_2, y_2)^2). \tag{4.33}
\end{aligned}$$

Two properties to note for later use are that

$$\mathbf{J}_{-m}(\omega) = \mathbf{J}_m^*(-\omega) \quad (4.34)$$

$$Z_{-m,-n}(\omega) = Z_{m,n}^*(-\omega). \quad (4.35)$$

If we now assume a single wire rather than a source and test particle, such that $x_1 = x_2 = x_0, y_1 = y_2 = y_0$. This gives a source current density

$$\begin{aligned} J &= I\delta(x - x_0)\delta(y - y_0)\exp(j(\omega t - kz)) \\ &= \frac{I}{2\pi a}\delta(r - a)\sum_{m=-\infty}^{\infty}\exp(jm(\theta - \theta_0))\exp(jm(\theta - \theta_0))\exp(j(\omega t - kz)) \\ &= \sum_{m=-\infty}^{\infty}a^{|m|}\exp(-jm\theta_0)J_m. \end{aligned} \quad (4.36)$$

We can then define $x_0 = a\cos\theta_0, y_0 = a\sin\theta_0$. Entering this into Eqn. 4.31 gives

$$\begin{aligned} Z &= Z_{0,0} + (x_0 - jy_0)Z_{1,0} + (x_0 + jy_0)Z_{-1,0} + (x_0 + jy_0)Z_{0,1} \\ &\quad + (x_0 - jy_0)Z_{0,-1} + (x_0 - jy_0)^2Z_{2,0} + (x_0 - jy_0)^2Z_{1,-1} + (x_0 - jy_0)^2Z_{0,-2} \\ &\quad + (x_0 - jy_0)(x_0 + jy_0)Z_{1,1} + (x_0 + jy_0)(x_0 - jy_0)Z_{-1,-1} + (x_0 + jy_0)^2Z_{-2,0} \\ &\quad + (x_0 + jy_0)^2Z_{-1,1} + (x_0 + jy_0)^2Z_{0,2} + O((x_0, y_0)^2) \\ &= Z_{0,0} + x_0(Z_{1,0} + Z_{-1,0} + Z_{0,1} + Z_{0,-1}) + jy_0(-Z_{-1,0} + Z_{-1,0} + Z_{0,1} - Z_{0,-1}) \\ &\quad + x_0^2(Z_{1,-1} + Z_{1,1} + Z_{-1,-1} + Z_{-1,1} + Z_{2,0} + Z_{0,-2} + Z_{0,2} + Z_{-2,0}) \\ &\quad + y_0^2(-Z_{1,-1} + Z_{1,1} + Z_{-1,-1} - Z_{-1,1} - Z_{2,0} - Z_{0,-2} - Z_{0,2} - Z_{-2,0}) \\ &\quad + 2jx_0y_0(-Z_{2,0} - Z_{0,-2} + Z_{-2,0} + Z_{0,2} + Z_{-1,1} - Z_{1,-1}) \\ &= Z_{0,0} + x_0(Z_{1,0} + Z_{-1,0} + Z_{0,1} + Z_{0,-1}) + jy_0(-Z_{-1,0} + Z_{-1,0} + Z_{0,1} - Z_{0,-1}) \\ &\quad + x_0^2(\bar{Z}_x + Z_{2,0} + Z_{0,-2} + Z_{0,2} + Z_{-2,0}) \\ &\quad + y_0^2(\bar{Z}_y - Z_{2,0} - Z_{0,-2} - Z_{0,2} - Z_{-2,0}) \\ &\quad + 2jx_0y_0(-Z_{2,0} - Z_{0,-2} + Z_{-2,0} + Z_{0,2} + Z_{-1,1} - Z_{1,-1}). \end{aligned} \quad (4.37)$$

It can then be seen that if measurements are made with $x_0 = 0$ and taking different values of y_0 that one obtains data with a parabolic fit in the y_0 axis. By fitting a curve to this we obtain constant (equal to the longitudinal impedance), linear and quadratic terms. Doing the same for $y_0 = 0$ allows us to derive two quadratic terms

$$Z_x^\perp = (\bar{Z}_x + kZ_{quad}) \frac{1}{k} = Z_x^{dip} + kZ_{quad} \quad (4.38)$$

$$Z_y^\perp = (\bar{Z}_y - kZ_{quad}) \frac{1}{k} = Z_y^{dip} - kZ_{quad} \quad (4.39)$$

$$(4.40)$$

where $Z_{quad} = \frac{1}{k} (Z_{0,2} + Z_{2,0} + Z_{0,-2} + Z_{-2,0}) = \frac{2}{k} (Z_{0,2} + Z_{0,-2})$, representing the impedance due to the displacement of the test particle in an accelerator. As we can measure $\bar{Z}_{x/y}$ independently using the two wire method we can thus independently measure Z_{quad} using a displaced single wire scan in both the x- and y-planes.

It can also be seen that

$$Z_x^\perp + Z_y^\perp = \frac{1}{k} (\bar{Z}_x + \bar{Z}_y) = Z_x^{dip} + Z_y^{dip} \quad (4.41)$$

where $\bar{Z}_{x/y}$ can be measured independently which gives a method of obtaining confidence in the wire measurements.

Asymmetric Structures

If Eqn. 4.37 is transformed from (x, y) coordinates to (a, θ) , the result is

$$\begin{aligned} Z = & Z_{0,0} + a [\cos\theta (Z_{-1,0} + Z_{0,1}) + j\sin\theta (Z_{-1,0} + Z_{0,1}) \cos\theta (Z_{1,0} + Z_{0,-1}) - j\sin\theta (Z_{1,0} + Z_{0,-1})] \\ & + a^2 [\cos^2 (Z_{1,1} + Z_{-1,-1}) + \sin^2 (Z_{1,1} + Z_{-1,-1})] \\ & + a^2 [\cos^2 (Z_{2,0} + Z_{0,-2} + Z_{1,-1}) + 2j\sin\theta \cos\theta (Z_{2,0} + Z_{0,-2} + Z_{1,-1})] \\ & - a^2 [\sin^2 (Z_{2,0} + Z_{0,-2} + Z_{1,-1})] \\ & + a^2 [\cos^2 (Z_{-2,0} + Z_{0,2} + Z_{-1,1}) + 2j\sin\theta \cos\theta (Z_{-2,0} + Z_{0,2} + Z_{-1,1})] \\ & + a^2 [\sin^2 (Z_{-2,0} + Z_{0,2} + Z_{-1,1})]. \end{aligned} \quad (4.42)$$

Grouping like terms this becomes

$$\begin{aligned}
Z &= Z_{0,0} + a [e^{-j\theta} (Z_{-1,0} + Z_{0,1}) + e^{j\theta} (Z_{1,0} + Z_{-0,1})] \\
&\quad + a^2 [(Z_{1,1} + Z_{-1,-1}) + e^{-2j\theta} (Z_{2,0} + Z_{0,-2} + Z_{1,-1}) + e^{2j\theta} (Z_{-2,0} + Z_{0,2} + Z_{-1,1})] \\
&= A_1 + ae^{-j\theta} A_2 + ae^{-j\theta} A_3 + a^2 e^{-2j\theta} A_4 + a^2 e^{2j\theta} A_5 + a^2 A_6
\end{aligned} \tag{4.43}$$

where $A_1 = Z_{0,0}$, $A_2 = Z_{0,1} + Z_{-1,0}$, $A_3 = Z_{0,-1} + Z_{1,0}$, $A_4 = Z_{0,2} + Z_{-1,1} + Z_{-2,0}$, $A_5 = Z_{2,0} + Z_{1,-1} + Z_{0,-2}$ and $A_6 = Z_{1,1} + Z_{-1,-1}$. Taking the earlier definition of Z_{quad} it can be deduced that

$$Z_{quad} = (A_4 + A_5 + A_6 - \bar{Z}_x) \frac{1}{k} = \frac{A_4 + A_5 + A_6}{k} - Z_x^{dip} \tag{4.44}$$

$$= \left(A_4 + A_5 - \frac{\bar{Z}_x - \bar{Z}_y}{2} \right) \frac{1}{k} = \frac{A_4 + A_5}{k} - \frac{Z_x^{dip} - Z_y^{dip}}{2}. \tag{4.45}$$

Consideration of Eqn. 4.43 lets it be seen that

$$A_4 + A_5 + A_6 = \frac{Z(a, 0) + Z(a, \pi) - 2Z(0, 0)}{2a^2} \tag{4.46}$$

$$A_4 + A_5 = \frac{Z(a, 0) + Z(a, \pi) - Z(a, \frac{\pi}{2}) - Z(a, \frac{3\pi}{2})}{2a^2}. \tag{4.47}$$

The constant impedance can also be seen to be found by taking a linear fit of the longitudinal impedance of a wire displaced in either the $\theta = 0$ or $\theta = \pi/2$ plane, and taking the linear term of the fit.

4.1.4 Measurements on Example Geometries

In this section shall be presented a number of example analyses of coaxial wire measurements done on geometries exhibiting top/bottom, left/right symmetry and an asymmetric structure. This permits a step-by-step guide to analysis of the wire measurements, which may not be immediately clear from the mathematical introduction. These simulations are carried out using both Ansoft HFSS and Maxwell using a driven modal solution.

The simulations with HFSS are carried out in the following manner: the measurement system is simulated by placing waveguide ports at either end of the geometry with

a conducting cylinder placed as the inner conductor of the coaxial system. The transmission parameters are then acquired as a result of the simulations. The wire may then be displaced as necessary for the displaced single wire measurements. For two wire measurements a quarter geometry may be simulated, using suitable boundary conditions on the quarter geometry.

Maxwell is a frequency domain code optimised for low frequencies (less than 10s of MHz). It does not permit the use of waveguide ports, however it does allow the definition of current segments with phase changes between them. By considering the current (either a single current segment to simulate a single wire, or two current carrying segments 180° out of phase for two wires) to be the equivalent of a beam current, and assuming the inclusion of the current carrying component is a negligible perturbation to the geometry, the impedance can be found by summing the power loss in the system. This can be seen to be equivalent to the beam induced heating experienced by a beam interacting with an impedance.

This can be thought of by comparing the system to a homogenous transmission line [53]. The power P of a wave travelling along the line is given by

$$P = P_0 e^{-2\alpha z} \quad (4.48)$$

where P_0 is the power at the beginning of the transmission line, α is the attenuation coefficient and z the distance along the line. By differentiation it can be seen that

$$\alpha = -\frac{1}{2P} \frac{dP}{dz} \approx \frac{1}{2P} \frac{\delta P}{\delta z} \quad (4.49)$$

where δP is the power lost over the short distance δz . The transmission parameter of a line S_{21} is given by

$$S_{21} = e^{-\alpha \delta z}. \quad (4.50)$$

If the impedance is evaluated using the log formula ($Z = Z_c \ln S_{21}$), it can be seen that the real impedance is subsequently given by

$$\Re e(Z) = Z_c \frac{2\delta P}{P}. \quad (4.51)$$

Assuming a peak current I_0 on the wire, $P = I_0^2 Z_c / 2$, which gives

$$\Re e(Z) = \frac{2\delta P}{I_0^2}. \quad (4.52)$$

To acquire the transverse impedance for two wire simulations it is simply necessary to normalise by the wavenumber $k = \omega/c$ and the separation of the wire Δ

$$Z_{dip} = \frac{c}{\omega \Delta^2} \frac{2\delta P}{I_0^2}. \quad (4.53)$$

Structure with Top/Bottom, Left/Right Symmetry

For the structure exhibiting top/bottom, left/right symmetry we use the Tsutsui model of two parallel plates as shown in Fig. 4.6(a). We use this due to the model allowing the prediction of the longitudinal, dipolar and quadrupolar impedances for a wide variety of materials and frequency ranges [32, 54, 55]. For these simulations a short segment of a Tsutsui geometry is simulated using two different materials, in this case graphite, to represent a structure with a poor conductivity ($\sigma_{graphite} = 7 \times 10^4 Sm^{-1}$), and 4A4 ferrite, to represent a magnetically lossy material (in this case, $\epsilon_r = 10$, $\sigma_{4A4} = 10^{-6} Sm^{-1}$ (a mild conductivity is applied to prevent static build up in ferrite components in accelerators), and $\mu_r = \mu' + j\mu''$, shown in Fig. 4.7.). In both cases the following dimensions are used: $a = 25mm$, $b = 5mm$, $d = 5mm$. A structure 150mm in length is used to reduce numerical noise due to the small losses given by the short length of the simulated DUT.

Two Parallel Ferrite Plates

For the simulations of two parallel ferrite plates the following parameters were used; for the displaced single wire measurements a wire of 0.3mm in radius, and the following displacement used to acquire the total transverse terms:

1. In the horizontal axis - displaced between -6mm to +6mm at intervals of 2mm

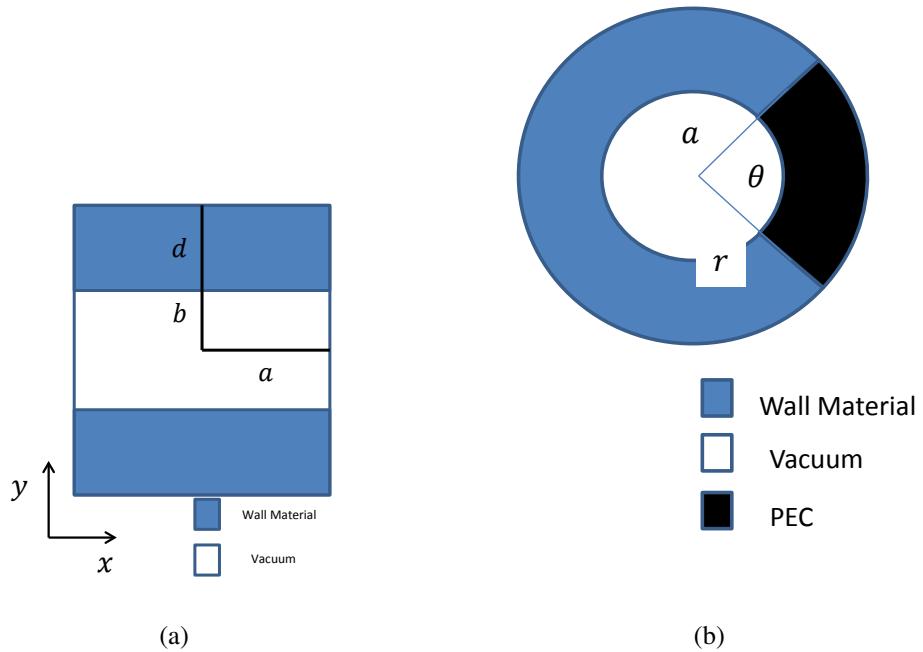


Figure 4.6: The geometries used for coaxial wire measurement simulations. For the geometry with top/bottom, left/right symmetry we use the Tsutsui model (4.6(a)) using two parallel plates. For the asymmetric structure we use the Zannini-model for a c-core ferrite kicker magnet (4.6(b)), which generates a constant term and a noticeable asymmetric term.

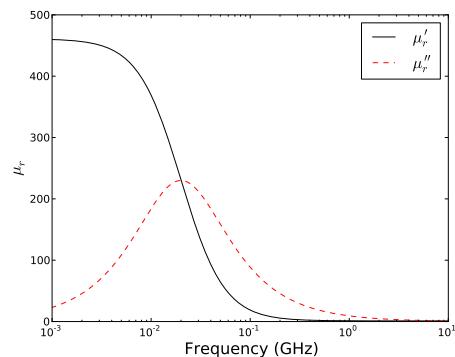


Figure 4.7: The complex permeability of 4A4 ferrite.

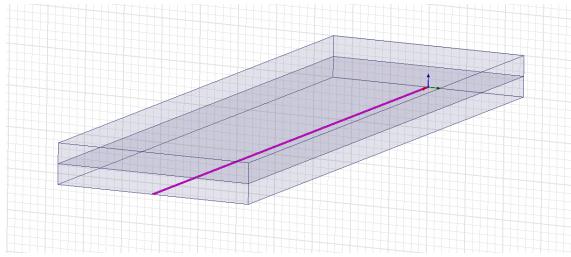


Figure 4.8: An example of the simulation model used for coaxial wire simulations. In this case a displaced single wire between two ferrite plates. The wire is highlighted in purple.

2. In the vertical axis - displaced between -4mm to +4mm at intervals of 2mm.

For the two wire simulations, two wires of radius 0.3mm are used, with a separation of 4mm in the x-dimension, and 3mm in the y-dimension. 4 simulation configurations are used described below:

1. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 20MHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 1-10MHz at 1MHz intervals.
2. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 200MHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 10-100MHz at 10MHz intervals.
3. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 2GHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 100MHz-1GHz at 100MHz intervals.
4. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 10GHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 1-10GHz at 1GHz intervals.

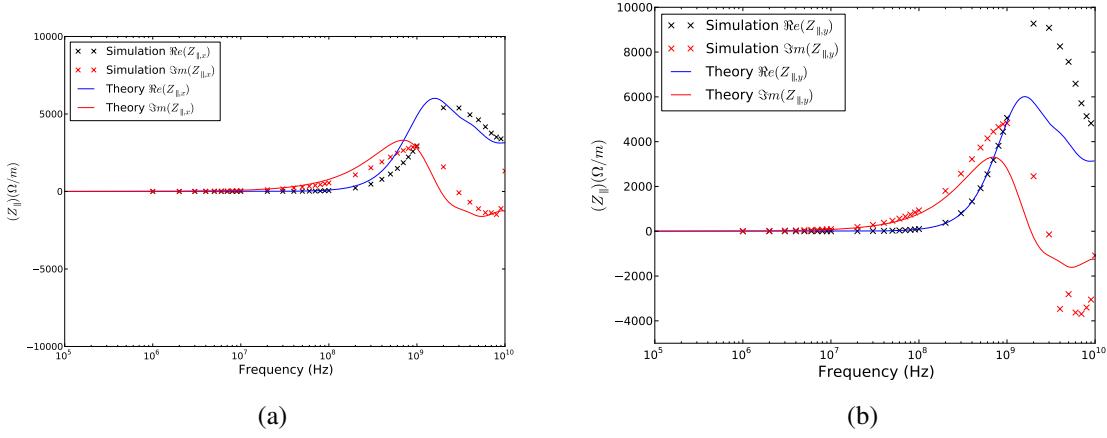


Figure 4.9: The longitudinal impedance of two parallel ferrite plates simulated using a longitudinal coaxial wire. Presented are the impedance as measured in the horizontal plane (4.9(a)) and in the vertical plane 4.9(b).

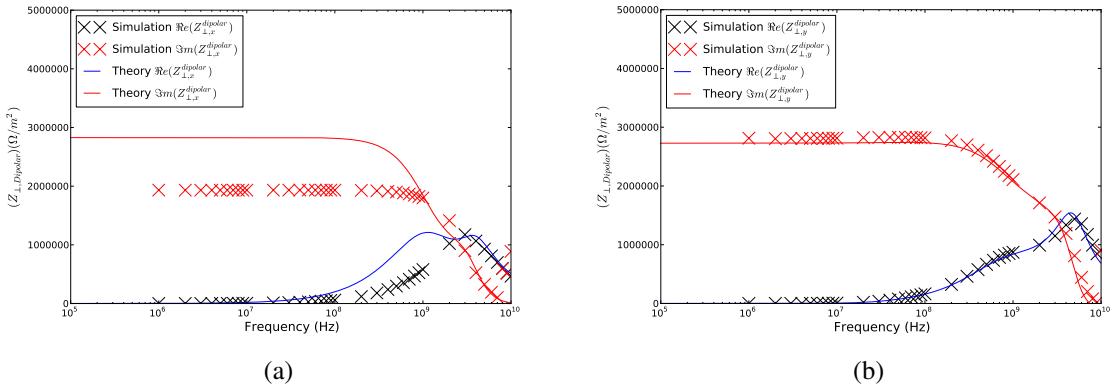


Figure 4.10: The dipolar impedance of two parallel ferrite plates simulated using two longitudinal coaxial wires. Presented are the impedance as measured in the horizontal plane (4.10(a)) and in the vertical plane 4.10(b).

These parameters are used to benefit from an appropriate mesh count for the given frequency range, thus increasing simulation speed by not using a high density mesh at frequencies where no benefits would be gained.

The longitudinal impedance is as determined by taking the constant term for a series of simulated displaced wire measurements in both the vertical and horizontal planes is shown in Fig. 4.9. It can be seen that in the frequency range below 100MHz the agreement between the coaxial wire results and the analytical results is very good in both the vertical and horizontal plane. Above 100MHz the agreement for the real components is very good

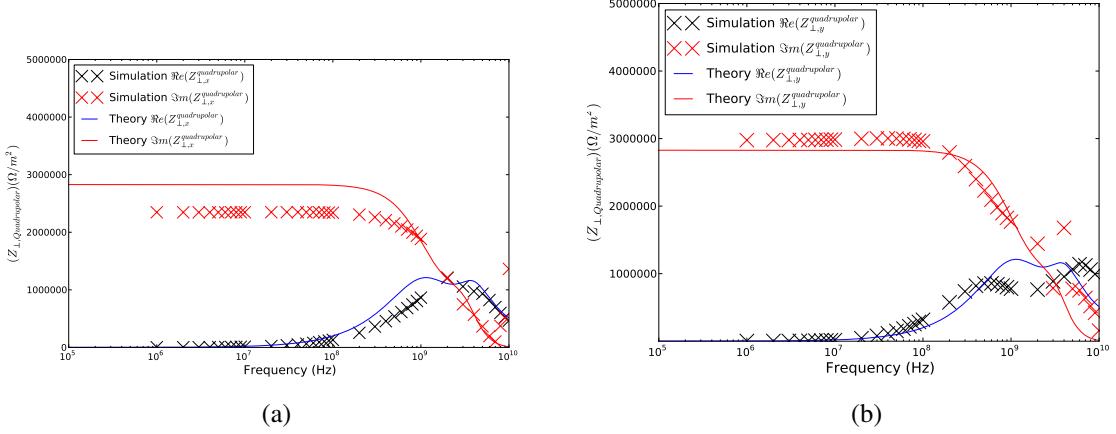


Figure 4.11: The quadrupolar impedance of two parallel ferrite plates simulated using a combination of displaced single wire simulated measurements and two wire simulated measurements. Presented are the impedance as measured in the horizontal plane (4.11(a)) and in the vertical plane 4.11(b).

for both results, however the imaginary component in the vertical plane displays some substantial disagreement. This is likely due to the high mesh density required to correctly evaluate the phase change along the length of the simulated structure. A higher mesh density may correct this, however limits of computational resource presently make this unfeasible.

The agreement between the simulations of the vertical dipolar impedance and the theoretical model is excellent across all frequencies for both the real and imaginary components. The agreement below 100MHz and above 1GHz is very good for the horizontal dipolar, with some divergence in the constant term of the imaginary impedance. The key difference is the failure of the coaxial method to resolve one of the peaks in the real impedance. The results for the dipolar impedance are shown in Fig. 4.10.

The results for the quadrupolar impedance are shown in Fig. 4.11. The vertical simulations agree well with the theory, correctly identifying the two peaks in the quadrupolar impedance. The agreement for the horizontal simulations with theory is less good. This can be explained by the derivation of the horizontal quadrupolar being highly dependent on the quality of the horizontal dipolar impedance results due to them cancelling each other to form the total transverse impedance. As the horizontal dipolar impedance does

not resolve the the subpeaks neither does the horizontal quadrupolar impedance calculations.

Two Parallel Graphite Plates

For the simulations of measurements of two parallel graphite plates, two different methods were used. Due to the non-ferritic properties of the graphite, it is possible to use Maxwell3D to simulate the power loss at lower frequencies, thus acquiring the real component of the impedance for low frequencies, in addition to using the classical coaxial wire method at higher frequencies in HFSS.

For the simulations of the power loss in Maxwell3D the following parameters were used; for the displaced single wire measurements a wire of 0.5mm in radius is modelled, and the following displacement used to acquire the total transverse terms:

1. In the horizontal axis - displaced between -6mm to +6mm at intervals of 2mm
2. In the vertical axis - displaced between -4mm to +4mm at intervals of 2mm.

For the two wire simulations, two wires of radius 0.3mm are modelled, with a separation of 8mm in the x-dimension, and 4mm in the y-dimension. Five simulation configurations are used as described below:

1. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 20kHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 1-10kHz at 1kHz intervals.
2. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 200kHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 10-100kHz at 10kHz intervals.
3. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 2MHz

solving to a second order basis. A discrete frequency sweep is then carried out in the range 100kHz-1MHz at 100kHz intervals.

4. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 10MHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 1-10MHz at 1MHz intervals.
5. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 100MHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 10-100MHz at 10MHz intervals.

These parameters are used to benefit from an appropriate mesh count for the given frequency range, thus increasing simulation speed by not using a high density mesh at frequencies where no benefits would be gained.

For the simulations of the single displaced wire in HFSS the following parameters were used; for the displaced single wire measurements a wire of 0.3mm in radius is modelled, and the following displacements to acquire the total transverse terms:

1. In the horizontal axis - displaced between -6mm to +6mm at intervals of 2mm
2. In the vertical axis - displaced between -4mm to +4mm at intervals of 2mm.

For the two wire simulations, two wires of radius 0.3mm are modelled, with a separation of 4mm in the x-dimension, and 3mm in the y-dimension. Three simulations configuration are used as described below:

1. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 20MHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 1-10MHz at 1MHz intervals.

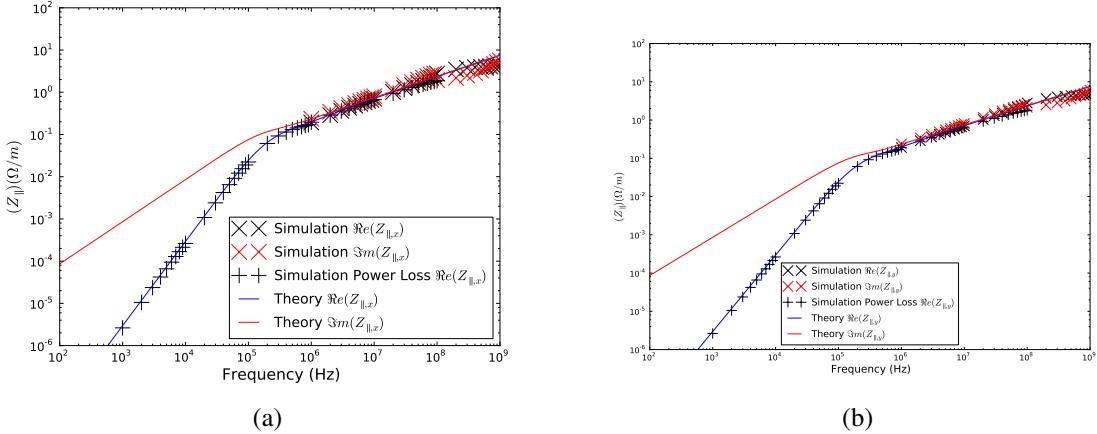


Figure 4.12: The longitudinal impedance of two parallel graphite plates as measured by taking the constant term of a quadratic equation fitted to a series of displaced single wire measurements. Shown are measurements acquired from fitting displacements in 4.12(a) horizontal axis and in 4.12(b) the vertical axis.

2. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 200MHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 10-100MHz at 10MHz intervals.
3. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 2GHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 100MHz-1GHz at 100MHz intervals.

As before these parameters are used to benefit from an appropriate mesh count for the given frequency range, thus increasing simulation speed by not using a high density mesh at frequencies where no benefits would be gained.

The longitudinal impedance can be seen in Fig. 4.12. It can be seen that the agreement for both the real component is excellent across the entire frequency range, for simulations using both the classical coaxial wire method and the power loss method of Maxwell3D. The agreement is also good for the imaginary component over much of the frequency range, becoming worse above 100MHz. This is likely due to insufficient mesh density to catch the relatively small phase shift at this frequency range.

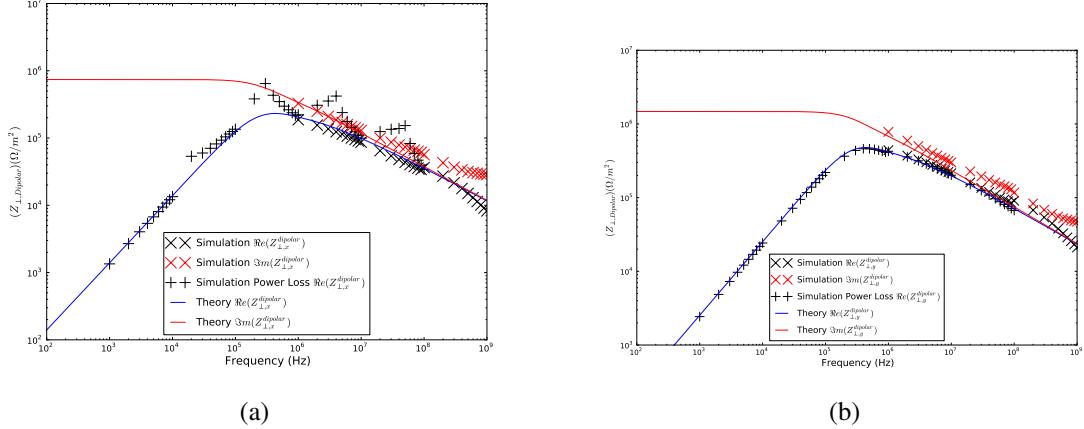


Figure 4.13: The dipolar impedance of two parallel graphite plates measured using two longitudinal coaxial wires. Presented is the impedance as measured in the horizontal plane (4.13(a)) and in the vertical plane 4.13(b).

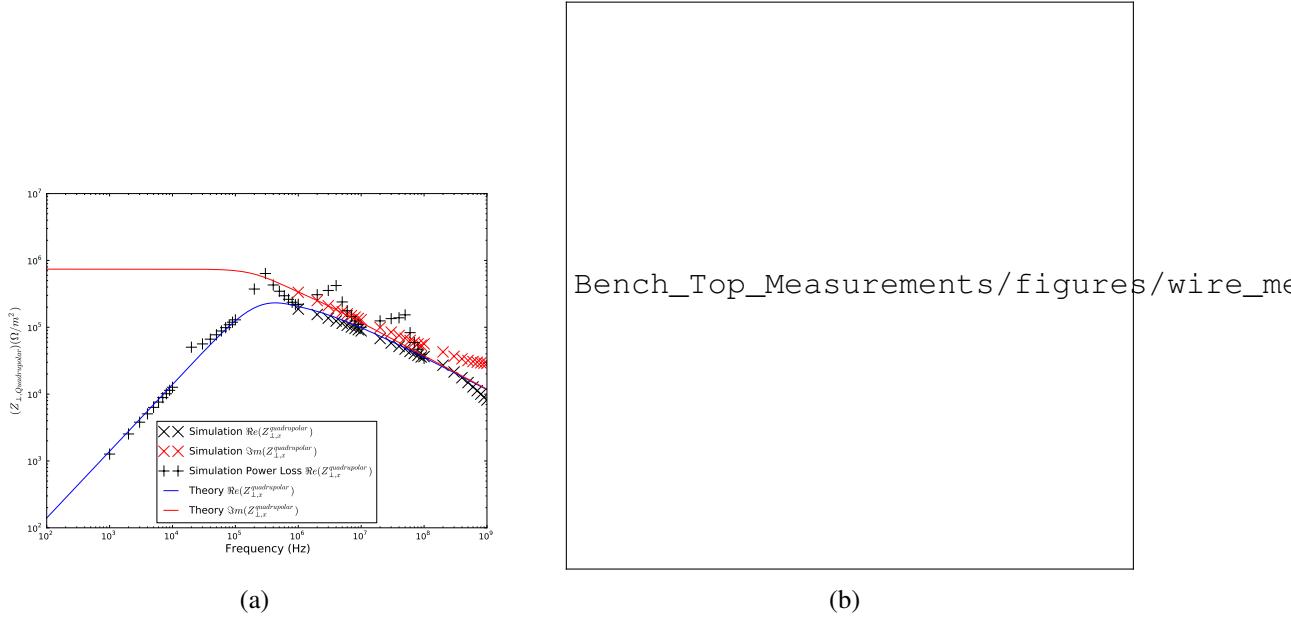


Figure 4.14: The quadrupolar impedance of two parallel graphite plates measured using a combination of displaced single wire measurements and two wire mesurements. Presented is the impedance as measured in the horizontal plane (4.14(a)) and in the vertical plane 4.14(b).

The agreement between simulations and theory for the vertical dipolar impedance can be seen to be very good over the entire frequency range also (see Fig. 4.13(b)). The results at low frequencies (below 100kHz) for the power loss method and at all frequencies for the classical coaxial wire method for the horizontal dipolar impedance agree very well with theory (see Fig. 4.13(a)).

C-Core Ferrite Kicker

To test the measurement method for an asymmetric structure a model of the c-core ferrite kicker magnet was used, as shown in Fig.4.6(b), the analytical details of which are given in [56]. Key in this type of structure is that it predicts a non-zero constant transverse impedance term as well as the quadrupolar terms, thus we may completely evaluate the asymmetric measurement method. For these simulations a structure of $a = 15\text{mm}$, $r = 20\text{mm}$, $\theta = \pi/2$, and 100mm in length was used. Simulations were carried out using the classical coaxial wire method as simulated in HFSS.

The following parameters were used for the simulations; wire of 0.2mm in radius, and the following displacement used to acquire the total transverse terms:

1. In the horizontal axis - displaced between -5mm to +5mm at intervals of 1mm
2. In the vertical axis - displaced between -5mm to +5mm at intervals of 1mm.

For the two wire simulations, two wires of radius 0.2mm are modelled, with a separation of 2mm in the x-dimension, and 2mm in the y-dimension. Four simulation configurations are used described below:

1. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 20MHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 1-10MHz at 1MHz intervals.
2. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 200MHz

solving to a second order basis. A discrete frequency sweep is then carried out in the range 10-100MHz at 10MHz intervals.

3. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 2GHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 100MHz-1GHz at 100MHz intervals.
4. an adaptive mesh generation set to a convergence criteria of S_{21} diverging by less than 0.005 between two subsequent solutions, at an adaptive frequency of 10GHz solving to a second order basis. A discrete frequency sweep is then carried out in the range 1-10GHz at 1GHz intervals.

These parameters are used to benefit from an appropriate mesh count for the given frequency range, thus increasing simulation speed by not using a high density mesh at frequencies where no benefits would be gained.

It can be seen that the longitudinal impedance agrees well over the entire frequency range below 1GHz (Fig. 4.15(a)). The analytical calculations breakdown above 1GHz due to the family of Bessel functions used for the calculations being optimised for low frequency calculations. Similarly the agreement for the dipolar impedance can be seen to be exceptionally good over the majority of the frequency range, with an increasing discrepancy at high frequencies (Fig. 4.15(b)).

To test the asymmetric method we should look at the constant and quadrupolar terms. In this case it can be seen that the agreement with the constant transverse term is exceptionally good across the entire frequency range (Fig. 4.15(d)). The agreement for the quadrupolar impedance is good in the range of frequencies below 1GHz. Above this the unsuitability of the family of Bessel functions used for this frequency range becomes more apparent and the simulated and analytical results diverge.

It can be seen that the proposed asymmetric method can replicate the beam coupling impedance of an asymmetric structure, correctly predicting both longitudinal and transverse (dipolar, quadrupolar and constant) terms below 1GHz.

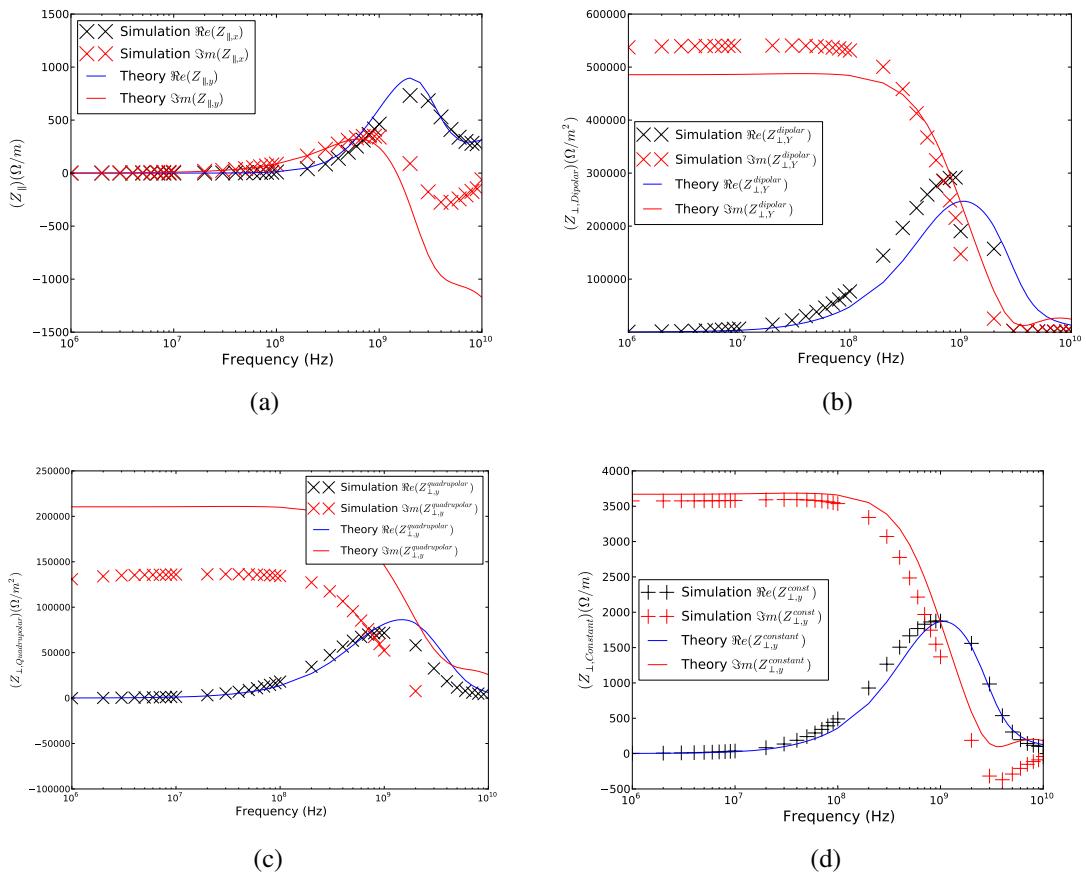


Figure 4.15: The impedance of the c-core ferrite kicker as acquired by simulating the classical coaxial wire method in HFSS. Shown is the 4.15(a) longitudinal impedance, 4.15(b) the dipolar impedance, 4.15(c) the quadrupolar impedance and 4.15(d) the constant transverse impedance.

4.2 High Q-factor Impedances

For high Q-factor impedances, such as cavity impedances, it is not appropriate to use a coaxial wire method to measure the impedance due to the large perturbation of the boundary conditions that it causes [57], in particular below the cut-off frequency of the connecting beam pipes. This is due to the presence of the coaxial wire reducing the cut-off frequency to 0Hz, thus allowing propagation losses at all frequencies rather than just above cut-off. To illustrate this, we can consider the total Q of a cavity to be related to the "trapped" cavity mode Q and the propagation losses as;

$$\frac{1}{Q_{total}} = \frac{1}{Q_{cavity}} + \frac{1}{Q_{prop}} \quad (4.54)$$

During excitation by a charged particle beam, propagation losses do not exist below the cutoff frequency and thus $Q_{prop} = 0$. However, the addition of the coaxial wire causes these propagation losses to occur at all frequencies. Importantly, the Q-factor of these propagation losses is of a similar magnitude or smaller than that of the cavity resonance, leading to a great distortion of the measured Q. Similarly, the perturbation of the conductive wire in the centre of the structure leads to a shift in the resonance frequency of the cavity modes. This has been well studied and illustrated in [57], an example of which is given in Fig. 4.2.

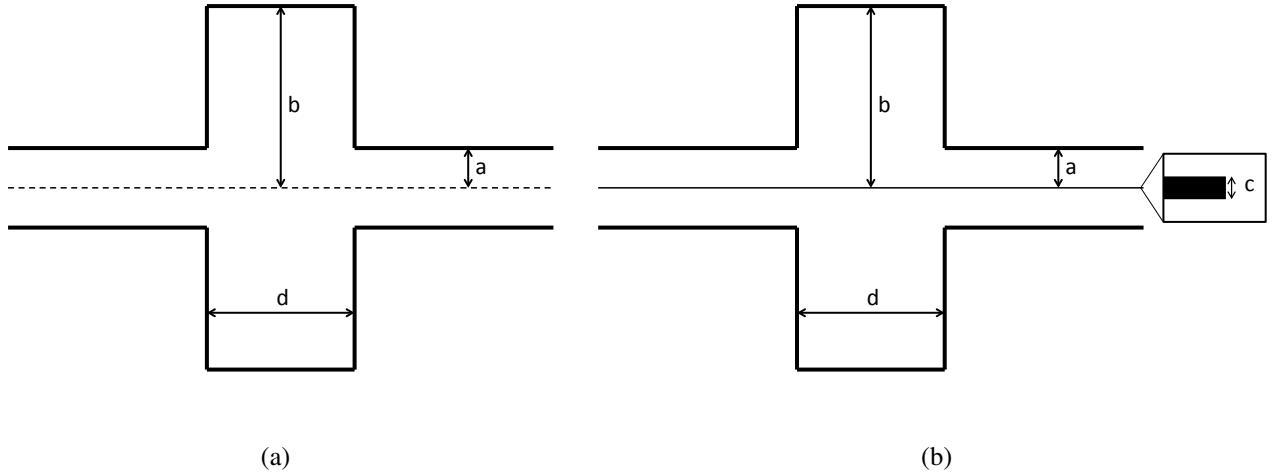


Figure 4.16: Comparison of the geometries of a cavity and attached beampipes 4.16(a) without and 4.16(b) with the coaxial wire in place. Note the dimensions and that the dashed line in 4.16(a) represents the rotational plane of symmetry

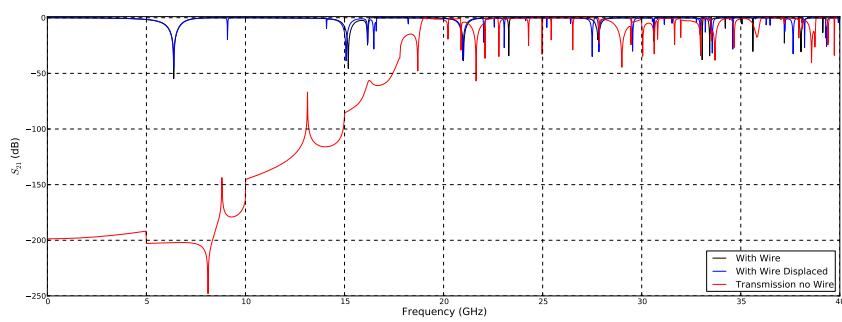


Figure 4.17: A comparison of the transmission parameters through a pillbox cavity with and without a coaxial wire. A displaced coaxial wire is also shown to illustrate the possibility of exciting dipolar modes also. It can be seen that the transmission signals are drastically changed depending on the presence or not of the wire.

Chapter 5

Computational Simulations of Beam Coupling Impedance

Whilst beam-based measurements and bench-top measurements techniques have been used for some time to measure the impedance of devices and machines, the use of numerical codes to solve 2D and 3D structures is relatively young as a method of identifying the impedance of devices. Recent progress in computational power has now made these a powerful tool in the regime of impedance evaluation. Codes exist that solve simple 2D structures (ECHO2D [58], ABCI [59]), 3D structures (CST Particle Studio [60], HFSS [61], Maxwell 3D [62], MAFIA [63]) and 3D structures using highly parallelised codes (GdFidl [64], ACE3P [65]) which allow the simulation of large, complex structures. The codes may be separated into two separate families; time-domain, which calculate the EM fields in a structure by solving Maxwell's equations in the time domain due to a signal impulse, and frequency-domain which can be used in a number of ways to simulate the beam coupling impedance.

Each of these families of codes has their own relative advantages and disadvantages and peculiarities to use. In this chapter there will be a general introduction to a number of the techniques that may be used to calculate the beam coupling impedance from both time-domain and frequency-domain simulations, along with the limitations of each method.

5.1 Time Domain Simulations

Time domain simulations typically rely on direct simulations of the propagation of an EM signal through a structure and evaluating the response in some manner. In this section we shall primarily discuss the use of direct particle beam simulation, that is the simulation of the beams EM profile via a source signal and then subsequently evaluating the trailing field as a result to acquire the wakefield of the source signal and thus the structure simulated.

5.1.1 Direct Simulation of a Particle Beam

A large majority of time domain simulation codes (ECHO, MAFIA, CST Particle Studio, GdfidL) use a method that in effect simulates the passage of a particle beam through the structure and evaluates the subsequent electromagnetic fields in the structure by this signal. This is done in the following way:

1. A signal representing the source bunch is defined using a given profile, and then passed through the structure from a defined starting displacement and at a given velocity. Additionally a line of integration is defined along which the witness signal will be taken. This in effect defines a source bunch and a witness particle.
2. The simulation is propagated for a given period of time to acquire a significant quantity of the wakefield to correctly analyse the frequency components. It can be seen that for both high-Q resonances and low frequencies this requires a longer wavelength, to encompass the long damping time and correctly resolve the signal frequency, respectively.
3. The observed signal is subsequently deconvolved from the source signal to obtain a single particle wakefunction.
4. This may then be Fourier transformed (using an FFT algorithm or other numerical methods) to acquire the beam coupling impedance.

These steps are illustrated for clarity in Fig. 5.1 using a simple pillbox cavity as an example, using the time domain code CST Particle Studio.

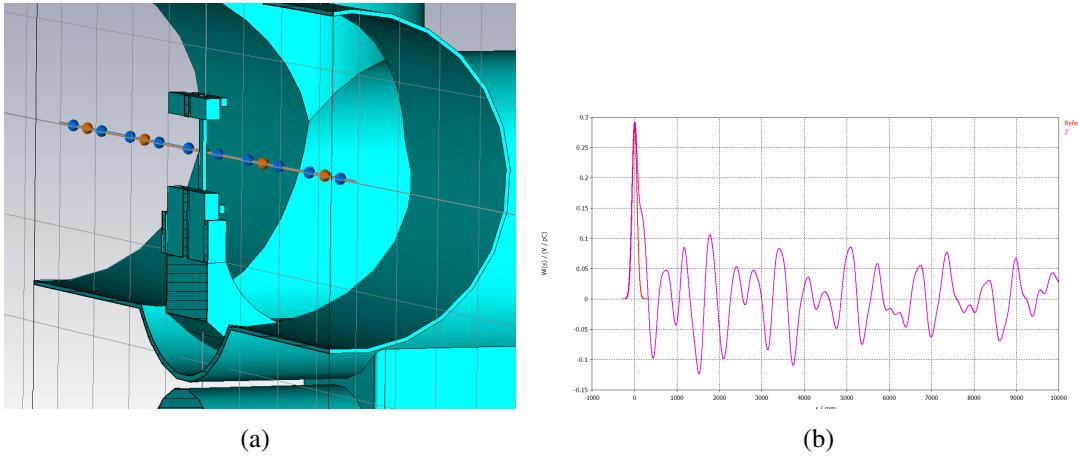


Figure 5.1: An illustration of the 5.1(a) source signal and witness integration in a time domain code. Here a sample from the UA9 goniometer is shown. The source signal and the resulting wakefield are shown in 5.1(b).

It can readily be seen that by defining either the source signal or witness at different displacements it is possible to acquire both the dipolar and quadrupolar impedances. Additional, by taking the gradient of the transverse impedances any constant transverse impedance terms can also calculated.

5.2 Frequency Domain Simulations

There are a number of methods of analysing the beam coupling impedance of a structure using frequency domain simulations. These involve evaluating the structure with no beam present via the use of eigenmode solvers, simulating measurement setups, particularly the coaxial wire technique for systems in which the impedance structure is largely unknown. Finally it is possible to simulate the particle beam also, however this requires a high resolution frequency scan for structures that are expected to be resonant in nature.

5.2.1 Eigenmode Simulations

Eigenmode solvers are a subset of frequency domain solver that are used to identify strongly resonant modes in a structure. These can be cavity modes, antenna like oscillations or a number of other resonances within the structure. The resulting output of the

simulation is typically the resonant frequency of the eigenmode(s), the quality factor Q of the mode (if lossy boundary materials are defined) and the field pattern of the eigenmode solution.

From the field pattern it is possible to readily calculate the longitudinal and transverse R/Q of each cavity mode as defined in Sec. 2.2.3. The field patterns may also be used to calculate a number of other properties for each eigenmode, such as surface losses and stored energy in the cavity, which will be explained in further details in Sec. 6.6. Further details on this method are available in [37].

5.2.2 The Coaxial Wire Method by Simulation

The coaxial wire method as described in Sec. 4.1 can be directly simulated using waveguide ports to represent matched connections at the ends of the device under test. The resulting simulations provide a transmission coefficient S_{21} which may subsequently be evaluated in the same manner as measurements made with a physical wire. As with the measurements used in practice, a displaced wire and two wires may be simulated and again treated as measurements.

5.2.3 Simulation of the particle beam

It is also possible to simulate a particle beam directly in the frequency domain. This is done by defining a wave source that produces a field similar to that of the particle beam. For ultrarelativistic beams this necessitates a source field that is tangential to the direction of motion, and this may technically be possible for cases in which $\beta < 1$. The field components due to the source may be acquired and are the equivalent of the wakefield contribution at a given frequency. The beam impedance Z can subsequently be evaluated from the resulting fields. Further details of this method may be seen in [66].

Chapter 6

Beam Coupling Impedance Reduction Techniques

Due the effects of wakefields on both beam stability and machine equipment it is often necessary to consider the reduction of the beam impedance of different components in particle accelerators. There are a number of ways in which it is possible to reduce the impedance depending on whether the impedance is primarily geometric or material dependent in nature, a number of the most commonly used materials and geometries are described. Different solutions from mechanical changes in the structures to damping materials placed to damp resonances are discussed. Further references are given to provide more in depth knowledge as required. In particular the use of ferrite to damp cavity modes that may not be removed by redesign, due to either time or mechanical constraints, has recently become a product of intensive study due to the high temperatures seen in many devices that have ferrite placed in them, with concern that the ferrites may heat beyond their Curie temperature during regular operation leading to a deteriorating case for the machine impedance.

6.1 Tapering of Step Transitions

Although the ideal beam pipe of an accelerator would be of unchanging diameter, it is often necessary to vary the width of the beam pipe for the use of beam instrumentation, insertion devices and machine protection, amongst others. As was shown in Sec. 2.2.3, the presence of changes in the pipe diameters gives rise to beam impedance originating at the point of transition. It has been previously demonstrated that this impedance is heavily influenced by the angle of the transition [67], in addition to the frequency of the resonance of the resulting cavity structure. In particular, this has an influence on the "low"-frequency broadband impedance, with gentler slopes causing a reduction in the "low"-frequency impedance.

There are of course space constraints which restrict the length which tapers may have, both in terms of machine length and the necessities of size due to the correct operation of the device (for example, collimators or beam instrumentation such as synchrotron radiation monitors). An example of this approach is shown in Fig. 6.1. This reduction technique has a strong effect of the broadband impedance contribution of a strong resonant impedance caused by step transitions. In particular, it is effective at reducing the imaginary component of the longitudinal beam coupling impedance, as can be seen in the design of the LHC Yellow Book design report for instance [1]. In this case it was determined that all transitions must observe a maximum gradient of 15° unless a design requirement necessitated otherwise.

6.2 Transition Pieces

Often it is necessary to have transitions in the beam pipe which can not be tapered, either due to space constraints or the operational requirements of the device containing the transition. This a common requirement in devices that require some mechanical freedom, such as bellows, or electrical isolation from the beam pipe, such as kicker magnets. For these devices it is often possible to use a transition piece, that is a one or several pieces of conducting material to screen any transition. These may be rigid or moveable as shown in

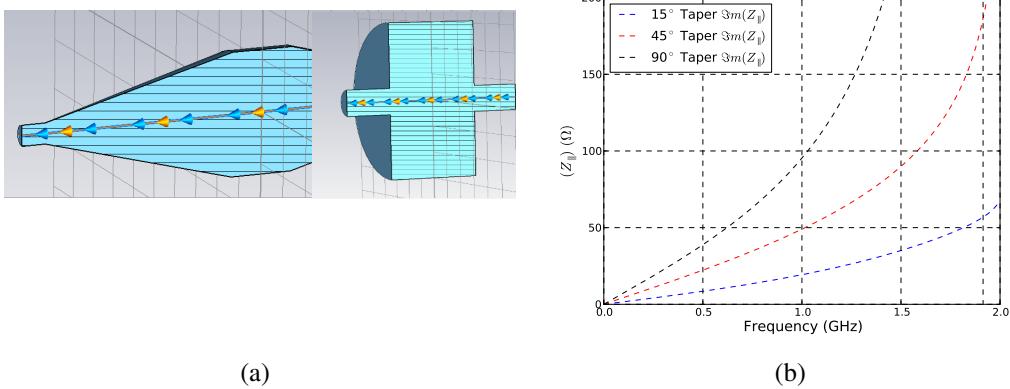


Figure 6.1: An example pillbox structure with and without a tapered transition region 6.1(a), in this case with the taper at 15° . The resulting imaginary component of the longitudinal impedances are shown in 6.1(b), as these are the most significant for beam stability.



Figure 6.2: Example of RF fingers (in this case for the PIMS module, placed between cryo-modules in the LHC).

Fig. 6.2, often referred to as RF fingers.

This method of impedance reduction is effective for a number of reasons. Firstly it provides a short, good conducting path for the image currents to flow that does not expose it to the cavity created by the transition. This serves to reduce the broadband impedance increase due to the transition. Secondly, by correctly designing the spacing in the transitions, it is possible to minimise field leakage to the surrounding cavities therefore decreasing the visibility of cavity resonances. As an example of a cavity with and without RF fingers and a number of intermediary steps, see Fig. 6.3, which illustrates the case of the VMTSA, a vacuum interconnect in the injection region of the LHC [68]. It is characterised by a large vacuum chamber (due to needing to contain two circulating beams) with a long set of bellows. The bellows were screened by a long set of RF fingers, which

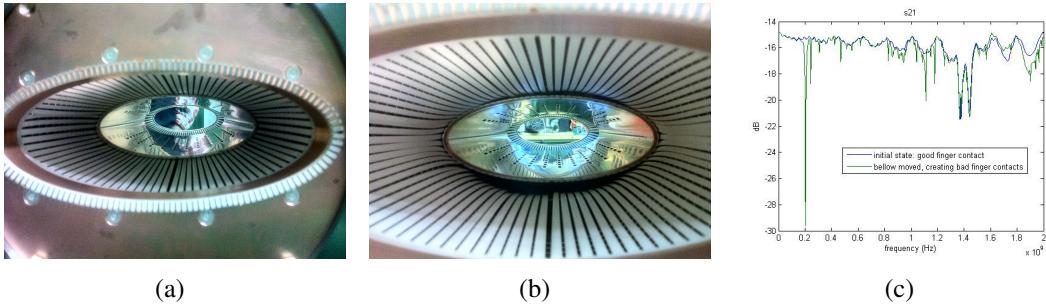


Figure 6.3: The layout of the RF fingers in the VMTSA both in 6.3(a) the fully operational configuration and 6.3(b) when the RF fingers lose contact. 6.3(c) shows the resulting beam coupling impedance of the two types of impedance as acquired by coaxial wire measurements. Photos and measurements courtesy of J.L. Nougaret.

functioned well when good surface contact was maintained between the fingers and the beam pipe. However, when this connection was disrupted (easily created via mechanical stress due to the weak pressure exerted by the afixing spring) the real component of the longitudinal beam coupling impedance increased drastically at low frequencies, causing further mechanical failure. This highlights the need to correctly consider the mechanical and electromagnetic properties of a impedance reduction system, especially it's possible failure points.

6.3 Conductive Coatings

As can be seen in Sec. 2.2.4, a higher conductivity in the material seen by the beam in a particle accelerator results a lower beam coupling impedance. Typically this rule of thumb is followed in the design of particle accelerators, however the operational requirements of devices in the machine often require that they not be made from a good conducting material. Examples of this include collimators (requiring high strength, mechanical stability and certain radiation properties), beam instrumentation and numerous other devices.

It has been shown [69] that a thin layer of high conductivity material placed on the surface of a poorly conducting material can effectively screen the beam from interacting with the poorly conducting material for a large frequency range. This can be explained by considering the skin depth δ of a material. As shown in Sec. 2.2.4,

$$\delta(\omega) = \sqrt{\frac{2}{\mu_0 \sigma \omega}}. \quad (6.1)$$

The skin depth can be thought of as the distance of penetration of the electromagnetic field into the material. It can thus be seen that for a good conducting material like copper ($\sigma_{cu} \approx 6 \times 10^7 Sm^{-1}$), for frequencies of the order of a hundred megahertz or above, a thickness of a $10\mu m$ is larger than the skin depth at 100MHz ($\delta(100MHz) = 6\mu m$), thus effectively screening the layer below. For many machines the part of the frequency spectrum of concern is above 100MHz (most electron machines, small hadron colliders). It is possible to use thicker coatings (on the order of millimetres) for machines that require a very broad frequency range screened. This is investigated in detail in Sec. 7.2.

6.4 Beam screens in kicker magnets

A substantial contributor to the beam coupling impedance in many machines, in both the longitudinal and transverse planes, are kicker magnets. These are magnets that generate a pulsed magnetic field for a limited period of time (i.e. not always on during beam operation as the dipoles and quadrupoles used for beam optics are), often for orbit corrections, extraction and injection. They have been known to be a problematic component of particle accelerators for a number of decades, mostly in lepton machines due to the traditionally higher beam currents in these machines.

In lepton machines kicker magnets can suffer from problems of heating due to eddy currents induced by traversing bunches, and the neccessity that a remedy to this solution maintain the rapid rise time of the magnetic field required for normal kicker magnet operation, which typically requires a field rise time on the order of the bunch or bunch train seperation in a machine [69].

In the LHC gaps are deliberately left between batches of beams in order to allow for the rise/fall of the magnetic field of kicker magnets. Thus in order to maximise the integrated beam intensity, the rise and fall time must be kept to a minimum, bearing in mind technical and economic constraints: for the LHC injection kickers the field rise and

fall times are 900ns and $3\mu\text{s}$ respectively.

As mentioned above, kicker magnets contribute a substantial fraction of the beam coupling impedance of an accelerator. In order to reduce the beam coupling impedance of a kicker magnet, a thin conductive coating or longitudinal conductors can be incorporated between the beam and the yoke of the kicker magnet to shield the yoke against the beam image current. However any such beam impedance reduction measures must not significantly increase the field rise and fall time of the kicker magnet.

For the LHC injection system a ceramic chamber is incorporated in the aperture of each kicker magnet: the purpose of the ceramic chamber is to mechanically support the conductors which shield the yoke against the beam image current. In addition the ceramic chamber electrically isolates the shield from the high voltage and return busbar of the kicker magnets.

However the ceramic chamber contributes a large imaginary component to the longitudinal impedance, due to its high permittivity and poor conductivity. In addition it is liable to build up static charges due to being an insulator in a region subject to high electric and magnetic fields.

Shielding will be studied in further depth in Chap. 8, with particular attention to the limitations in use in a high current hadron machine.

6.5 Serigraphy on Kicker Magnets

As described in Sec. 6.4, kicker magnets are often a substantial contributor towards beam coupling impedance. For many machines they were not foreseen to be a limiting factor to beam operation during construction due to either low beam current, long bunch lengths, large bunch separations or both. However, with increasing improvements in machine performance, it is possible that they may become a limiting factor, as was the case for the SPS extraction kicker magnets [70].

For these existing devices, limitations of both time and budget may require the use of retroactive solutions to large beam impedances. Often these must be added to the original

equipment, as the continued correct operation of the device requires minimal disruption to the geometry and surfaces of the device. In the case of the SPS extraction kicker magnet (SPS-MKE), the aperture size had to be preserved, as well as the field rise time of the kicker. In this an innovative solution was found - the use of seriography. This entailed the printing of a set of interleaved fingers (see Fig. 6.4) made from a good conductor (silver), which form a good conductive path for the beam image currents: the ferrite dielectric provides a reasonable capacitive coupling between the interleaved fingers. This serves to replace the broadband impedance typically associated with a ferrite dominated resistive wall impedance with a low broadband impedance, with strong resonant impedances due to the capcitively coupling and physical length of the fingers. The results in the case of the SPS-MKE can be seen in Fig. 6.4(c).

6.6 Use of damping materials to de-Q resonant caviities

For a number of devices it is unavoidable to have a cavity present in the structure. In addition it is often not possible to design the cavity with either tapering or transition pieces due to the need for moveable components; this is the case for a wire scanner or a collimator whose aperture changes with beam parameters. In this case it is necessary to find a way of reducing the beam impedance by altering the properties of resonances. Often it is only the peak value of the impedance attributable to a resonance that is of concern from a beam stability/beam induced heating point of view.

If we consider the defining properties of a resonant impedance, f_{res} , R/Q and Q , there are a number of properties that should be noted in changing them. Both f_{res} and R/Q are strongly determined by the geometry of the structure, and thus cannot be significantly modified without possibly neccessitating a modification of the device being altered which may hinder the intended operation. Thus one approach to use is to alter the Q of the resonance. A well known method of altering the Q of a resonant cavity is to add a dispersive or ferritic material to the cavity volume [71], that is a material that has complex permitivitty or permeability , given by $\epsilon_r = \epsilon' - j\epsilon''$ and $\mu_r = \mu' - j\mu''$ respectively. An example of

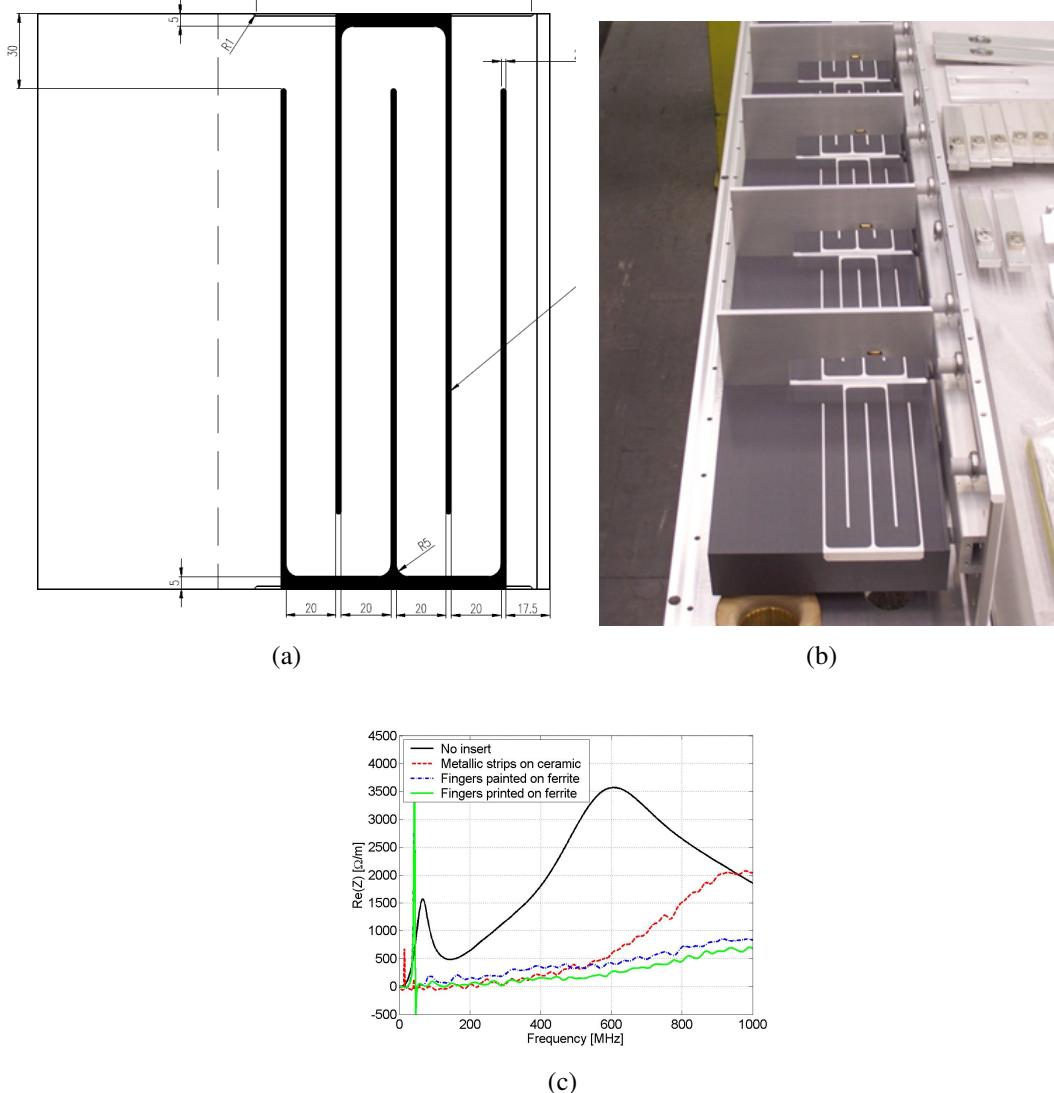


Figure 6.4: An example of seriography in the SPS Extraction Kicker Magnets (SPS-MKE). The layout of the interleaved fingers is shown in 6.4(a) and the actual seriographed ferrites in 6.4(b). A comparison of the longitudinal beam coupling impedance with and without the seriography is shown in 6.4(c).

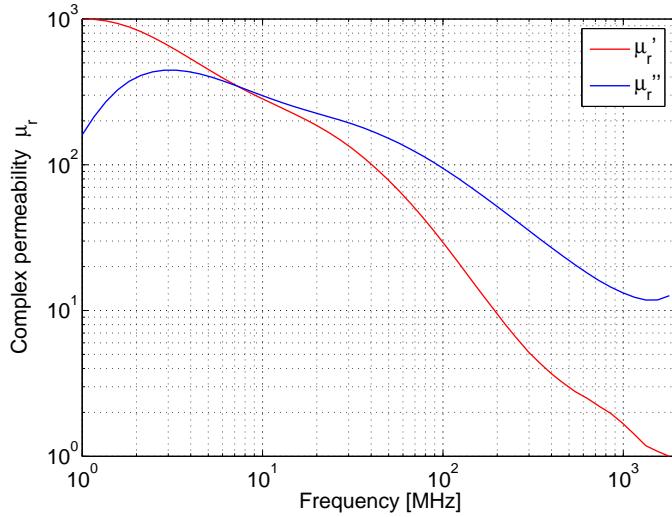


Figure 6.5: The complex permeability of a sample ferrite of the sort used for damping. In this case 8C11. In use a high T_c ferrite is recommended, such as TT2-111R.

the permeability of some sample ferrite damping materials is shown in Fig. 6.5

The addition of this family of materials to the cavity has the following effect on the cavity resonances:

1. The resonant frequency of any resonance ω_{res} is reduced by the inclusion of the dispersive material. This can be understood either by considering:
 - the μ_r/ϵ_r increasing the effective electrical volume of the cavity by its inclusion, thereby increasing the effective dimensions of the resonant cavity.
 - the RLC equivalent circuit of a cavity resonance, the inclusion of the dispersive material increases either or both of (depending the properties of the material) the inductance and capacitance of the cavity.
2. The R/Q of the cavity experiences little change. There is a slight modification; either an increase that can be attributed to the increased stored energy in the cavity mode due to $\epsilon' \neq 1$ or a decrease due to the rearranging field patterns (caused by the inclusion of the dispersive material) decreasing the stored energy.
3. The Q of the resonance is drastically reduced. This is due to the strong change in

the damping time of the resonance due to the addition of the damping material. In terms of cavity properties this can be thought of as the losses in the cavity increasing more rapidly than the stored energy in the cavity.

As can be seen, the resulting effect is to drastically reduce the Q of a cavity resonance, and then by the relation $R_s = (R_s/Q)Q$ it can be seen that the shunt impedance will decrease proportional to Q . This reduces the peak of R_s , but broadens the width of the resonance peak. This indicates two effects of using damping materials as an impedance reduction technique; effects dependent on the shunt impedance R_s are suppressed, however effects dependent on the broadband behaviour may suffer negatively as a result. Due to the strong frequency dependent nature of many impedance-driven instability mechanisms and beam-induced heating, these negative side effects rarely outweigh the benefits using damping material in a cavity if necessary.

6.6.1 Heat Loads on the Damping Material

During experience of estimating the heat loads on ferrite damped cavities in high intensity hadron machines (see Sec. 7.3 for more details), a number of surprising observations were made. In particular the placement of ferrite in a cavity does not always produce a significant reduction in the Q of a resonance and that in such cases the percentage of the power loss in the ferrite was comparatively small compared to conventional wisdom: that in a ferrite damped cavity the majority of power loss would be in the ferrite. It was thus decided to investigate how the addition of a damping material, in this case a ferrous material, to a cavity would alter both the characteristic resonance properties of the cavity and the location of the power load due to interaction with the beam in the cavity.

Two different geometries were used, one of which could be treated analytically to provide a benchmark for the simulation code, and one in which the ferrite is shielded from being directly seen by the traversing beam, as is normally done to reduce the effects of a resistive wall type impedance due to the ferrite. These geometries are shown in Fig. 6.6. A single eigenmode of each cavity is investigated, both with and without a

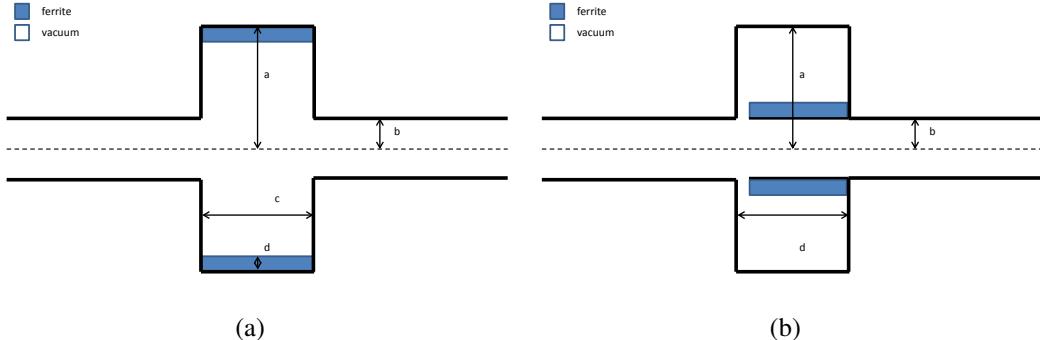


Figure 6.6: Two sample geometries used to examine the effects of ferrite damping material on cavity resonances. 6.6(a) shows a cavity with the ferrite unshielded, and 6.6(b) shows a more realistic case in which the ferrite is shielded from directly seeing the traversing beam.

damping material.

For this analysis, a cavity of dimensions $a = 60\text{mm}$, $b = 5\text{mm}$, $c = 20\text{mm}$, made from a material with a conductivity $\sigma = 1.1 \times 10^6 \text{Sm}^{-1}$ is used for the simulations of an unshielded cavity. A layer of "ferrite" 0.5mm thick is placed as shown in Fig 6.6(a). This material is given the following properties: $\epsilon' = 10$, $\epsilon''/\epsilon' = 0$, $\mu' = 1$. μ''/μ' is changed between 0 and 0.2 in steps of 0.02 in order to alter the Q of the resonant mode in incremental steps with the intent of observing how the properties of the cavity change with different scales of damping of the resonance. The "ferrite" is also given a mild conductivity ($\sigma_{ferr} = 10^{-6} \text{Sm}^{-1}$) as is normal in accelerator ferrites to reduce electrostatic charge build up.

For the shielded geometry, we use a cavity of the same dimensions as for the unshielded case, with a layer of conductive material 1mm thick placed on the interior of the cavity. A gap of 5mm is left between the beam pipe and the cavity for the beam to couple to the cavity. A ring of ferrite 0.5mm in thickness is then placed on this surface as is shown in Fig. 6.6(b).

Before carrying out the analysis of the location of the heat loss in ferrite, it is prudent to verify that the losses calculated using the field calculator in HFSS are self-consistent and well understood. HFSS calculates two losses internally; the surface loss density and volume loss density. The surface loss density p_s is defined in HFSS as

$$p_s = \Re e (\mathbf{S} \cdot \mathbf{n}) \quad (6.2)$$

where \mathbf{S} is the Poynting vector and n is the out normal vector to the surface boundary [61]. By integrating this over all surfaces the total surface losses in the cavity are obtained. The total wall losses are also given by

$$P_{loss,wall} = \frac{R_{wall}}{2} \int_S |\mathbf{H}_{surf}|^2 dS \quad (6.3)$$

where R_{wall} is the surface resistance of the wall and \mathbf{H}_{surf} is the surface magnetic field.

HFSS defines the volume loss density p_v as

$$p_v = \frac{1}{2} \Re e (\mathbf{E} \cdot \mathbf{J} + (-\nabla \times \mathbf{E}) \cdot \mathbf{H}) \quad (6.4)$$

where again this may be intergrated over all space to obtain the total volume losses. In addition to these methods of calculations of the losses due to the fields in the cavity, it is possible to calculate an equivalent loss of a particle traversing on axis by considering of ohmic losses, with the voltage V that is experienced by the particle traversing the cavity, $R = R_s$ the shunt impedance of the cavity resonance and I the beam current. As the eigenmode simulation does not directly simulate a beam, the effective power loss is given by

$$P_{loss} = \frac{V^2}{R_s}. \quad (6.5)$$

The surface losses and volume losses are subsequently seperately compared. For the surface losses, the internal surface loss density integrated over all surfaces calculated by HFSS, wall losses as given by Eqn. ?? and the equivalent losses of a particle on axis are compared. For this we use the unscreened cavity with no ferrite present to have only surface losses present. The calculated results are shown in Tab. 6.1, given in watts normalised to a peak electric field of $1Vm^{-1}$ in the cavity. It can be seen that the two calculations

Table 6.1: Comparison of the power loss on the surface of a pillbox cavity by both direct calculation and internal calculation by HFSS (In units normalised to 1V/m maximum electric field)

| Calculation Type | Normalised Power Loss (W) |
|---------------------------------|---------------------------|
| Direct calculation | 6.2e-10 |
| HFSS internal loss calculations | 6.22e-10 |
| Loss of an on-axis particle | 5.1e-10 |

Table 6.2: Comparison of the power loss in the volume of a pillbox cavity by both direct calculation and internal calculation by HFSS (In units normalised to 1V/m maximum electric field)

| Calculation Type | Normalised Power Loss (W) |
|---------------------------------|---------------------------|
| Direct calculation | 1.28e-8 |
| HFSS internal loss calculations | 1.29e-8 |
| Loss of an on-axis particle | 1.33e-8 |

due to the surface fields themselves agree exceptionally well, and the calculation for the equivalent loss of an on-axis particle is agrees to within 20%.

For the volume losses the cavity geometry for the unshielded case is used, with a layer of ferrite 0.5mm thick on inside surface of the cavity. This ferrite has the following material properties; $\epsilon' = 10$, $\epsilon'' = 0$, $\mu' = 10$, $\mu''/\mu' = 0.1$. For this comparison the internal volume loss density integrated over the whole volume as calculated by HFSS, the volume losses using Eqn. 6.4 and the equivalent loss of an on axis particle are calculated, again with loss normalised to a peak electric field of $1Vm^{-1}$ in the cavity. The results are shown in Tab. 6.2. It can be seen that the agreement between all three methods of calculating the losses in the cavity is exceptionally good, differing by less than 4%.

The resulting real component of the longitudinal beam coupling impedance for the case of unshielded ferrite is shown in Fig. 6.7. The reduction in the resonant frequency and the increase in the peak impedance from the cavity without any damping material to that with is due to the presence of a region of $\epsilon_r > 1$. Clearly seen can be the effect of the presence of increasing loss tangent of the ferrite, greatly broadening the impedance peak, with the effect of reducing R_s of the resonance. The cause of this reduction of R_s can

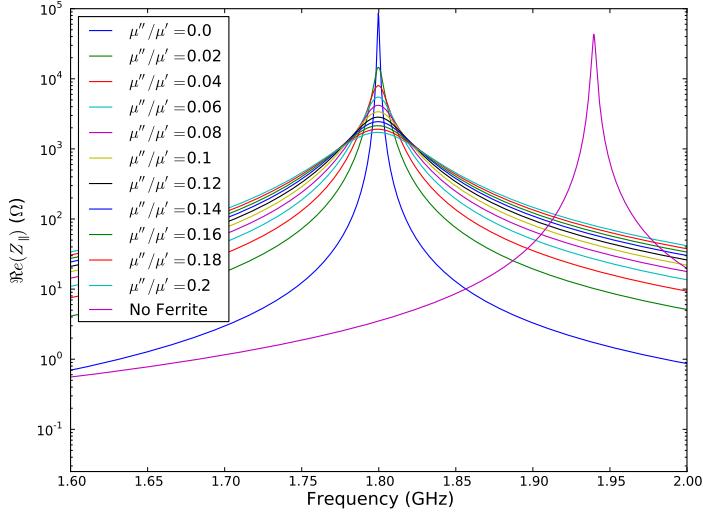


Figure 6.7: The real component of the longitudinal beam coupling impedance of a cavity without and with a damping material with $\epsilon' = 10$, $\mu' = 10$ and μ'/μ' is varied. The non-damped cavity is shown for comparison. The change in resonance frequency and shunt impedance impedance is due to the increased ϵ' of the damping material.

be attributed to the reduction in Q for each resonance, as shown in Fig. 6.8(a). It can be clearly seen that the presence of a small piece of ferrite very strongly decreases the Q of a resonance. The corresponding change in the percentage of the power loss in the ferrite itself as the Q is decreased is shown in Fig. 6.8(b). It can be seen that the power loss is rapidly localised to the ferrite as the Q decreases. To quantify to this power loss: the power loss due to this cavity resonance is calculated assuming a beam with 1.15×10^{11} particles per bunch, 288 bunches, a ring circumference 6911m and a bunch length $4\sigma = 0.04m$ assuming a gaussian bunch distribution and that the resonance falls on a beam harmonic, shown in Fig. 6.9. Here it can be clearly seen that the power loss in the ferrite rapidly converges to the total losses in the cavity, confirming the assumption that most of the power loss for a cavity resonance damped by a damping material is lost in the damping material.

For the case of the shielded ferrite, the real component of the beam coupling impedance is shown in Fig. 6.10. As with the case of the unshielded ferrite, the addition of the damping material causes a decrease in the resonant frequency of the cavity mode, again due to

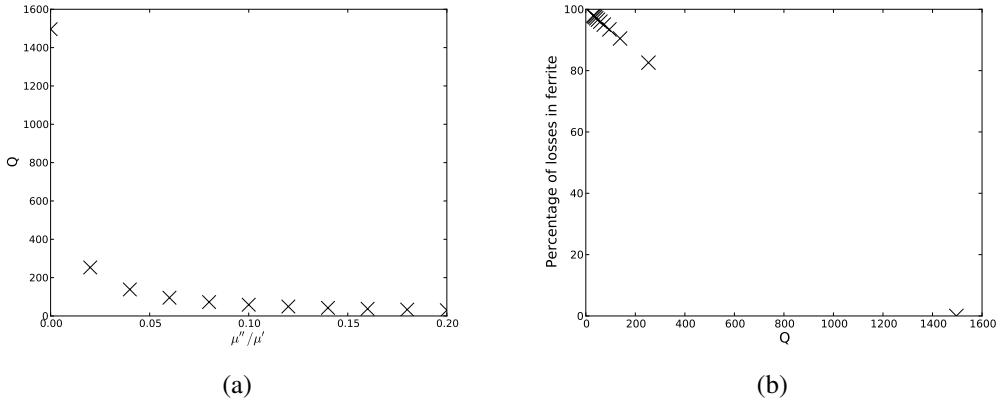


Figure 6.8: 6.8(a) The reduction in the Q of the cavity resonance with the increasing loss tangent of the ferrite damping, showing a strong decrease of the resonant Q with a small increase in loss tangent. 6.8(b) The percentage of the power loss in the ferrite as the resonant Q decreases. this can be seen to tend towards 100% as the Q approaches 0.

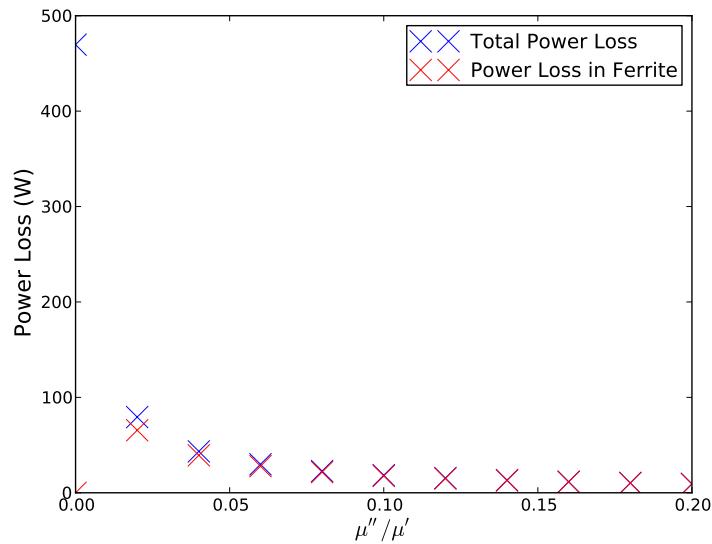


Figure 6.9: The power loss due to a beam with 1.15×10^{11} particles per bunch, 288 bunches, a ring circumference 6911m and a bunch length $4\sigma = 0.04m$ assuming a gaussian bunch distribution in the unscreened cavity.

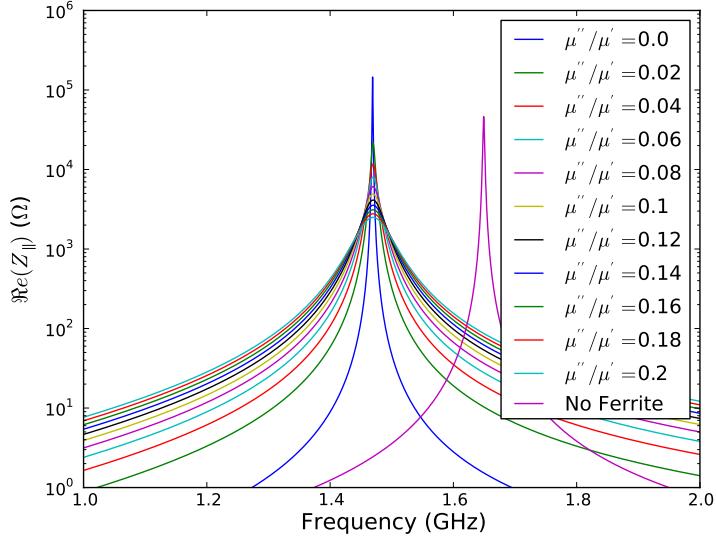


Figure 6.10: The real component of the longitudinal beam coupling impedance of a cavity without and with shielded damping material with $\epsilon' = 10$, $\mu' = 10$ and μ'/μ' is varied. The non-damped cavity is shown for comparison. The change in resonance frequency and shunt impedance impedance is due to the increased ϵ' of the damping material.

the addition of a material with $\epsilon_r > 1$. In addition, the shielding causes a further decrease in the resonant frequency, in this case due to the rearrangement of the field lines due to the changed boundary conditions.

As can be seen from Fig. 6.11(a) the decrease in the Q of the resonance by the increasingly more lossy ferrite follows a similar pattern to that shown by the unshielded structure, as is the increase in the percentage of power loss in the ferrite for the increasing damping of the resonance, shown in Fig. 6.11(b). The corresponding change in the power loss in both the cavity as a whole and the ferrite is shown in Fig. 6.12. As with the unscreened case, the power lost in the ferrite rapidly converges with the power loss in the entire cavity, indicating that magnetic losses are dominating the losses.

From these results it can thus be seen that the inclusion of the shielding does not substantially effect the losses due to strong cavity resonances, whilst aiding in reducing the effects of image current flowing through the ferrite (a broadband effect, and thus not considered in the eigenmode simulations). In addition, we see that if the cavity mode

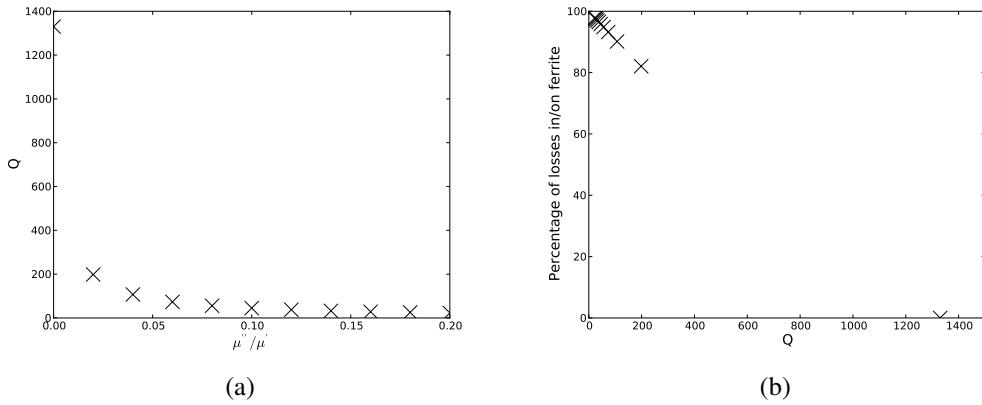


Figure 6.11: 6.11(a) The reduction in the Q of the cavity resonance with the increasing loss tangent of the ferrite damping, showing a strong decrease of the resonant Q with a small increase in loss tangent. 6.11(b) The percentage of the power loss in the ferrite as the resonant Q decreases. this can be seen to tend towards 100% as the Q approaches 0.

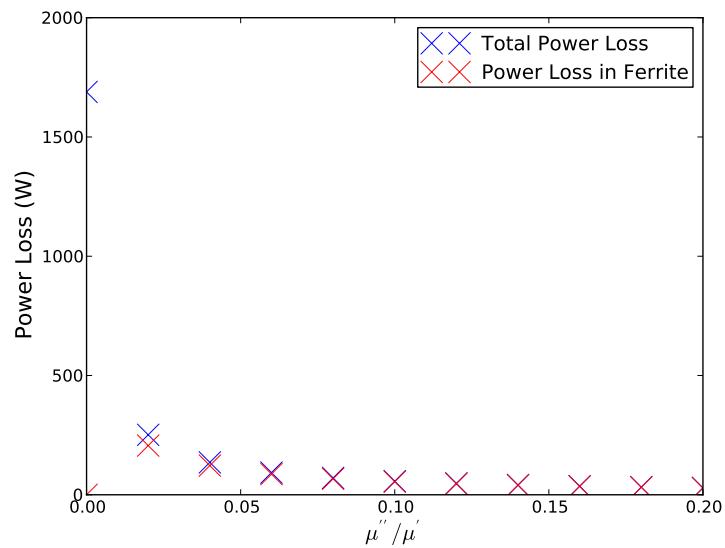


Figure 6.12: The power loss due to a beam with 1.15×10^{11} particles per bunch, 288 bunches, a ring circumference 6911m and a bunch length $4\sigma = 0.04m$ assuming a gaussian bunch distribution in the screened cavity.

is strongly damped by the presence of ferrite (i.e. the Q is reduced by a factor 20 or so) it should be expected that the vast majority of the remaining power lost by particles interacting with the cavity resonance should ultimately be lost in the damping material.

Chapter 7

LHC Collimation Upgrades

7.1 Introduction

The LHC collimation system is a key part of the machine protection system in the LHC. Due to extremely high stored beam and magnetic energy in the LHC [72], amounting to some 160MJ of beam energy and 10GJ of stored magnetic energy, it is necessary to keep close control on the losses experienced by the system. In the LHC this is done by a combination of monitoring the losses within the machine, carefully controlled losses by the collimation system, and a rigorous interlock system designed to dump the beam safely in the event of the development of dangerous behaviour by the circulating beam or a malfunction by safety critical equipment [72].

The collimation system in the LHC is a four-stage system, composed primarily of primary (TCP), secondary (TCS), and tertiary (TCT) collimators. These serve to scatter the particle halo, then further scatter and absorb the scattered particles. Further protection is provided by absorbers (TCLA), collimators at the injection regions (TCLI and TDI) and at the extraction region (TCDQA). In particular the TCTs are placed near the experimental IPs to protect the inner triplet magnets (used for final focusing of the beam before collision). In total the collimation system is broken down into two IRs; IR3 for betatron cleaning, in which there are:

1. 1 primary collimator

2. 4 secondary collimators

3. 4 absorbers

per beam and IR7 for momentum cleaning, which is composed of:

1. 3 primary collimators

2. 11 secondary collimators

3. 5 absorbers

per beam, with an additional 8 tertiary collimators (2 per experimental IP) per beam.

In addition to the collimators at the injection and extraction regions each beam is exposed to 44 different moveable collimators per circulation of the machine. The primary and secondary collimators presently all have a jaw material carbon reinforced graphite (conductivity $\sigma_{graphite} = 7 \times 10^4 Sm^{-1}$ for the jaw material). This material was chosen due to the requirement for a robust jaw material (mechanically stable under large thermal shock) from a machine protection point of view, however not optimised from a beam impedance point of view.

The current collimation system has demonstrated to be exceptionally effective at it's job of providing machine protection to the LHC [73], however it has been shown to be a limiting factor in the luminosity of the LHC due to the large contribution to the transverse beam coupling impedance by the primary, and especially the numerous secondary collimators in the system, which are also almost double the length of the primary collimators.

The phase 1 collimator (those presently (as of 2012) in place in the LHC) designs have a number of design features that are designed to reduce the beam coupling impedance of each device. Although the resistive wall contribution to the beam coupling impedance, due to the poorly conducting jaw material, is significant, the use of longitudinal RF fingers in the transition between the beam pipe to the collimator jaws and of a system of sliding contact fingers isolates the beam from seeing the collimator vacuum tank (see Fig 7.1

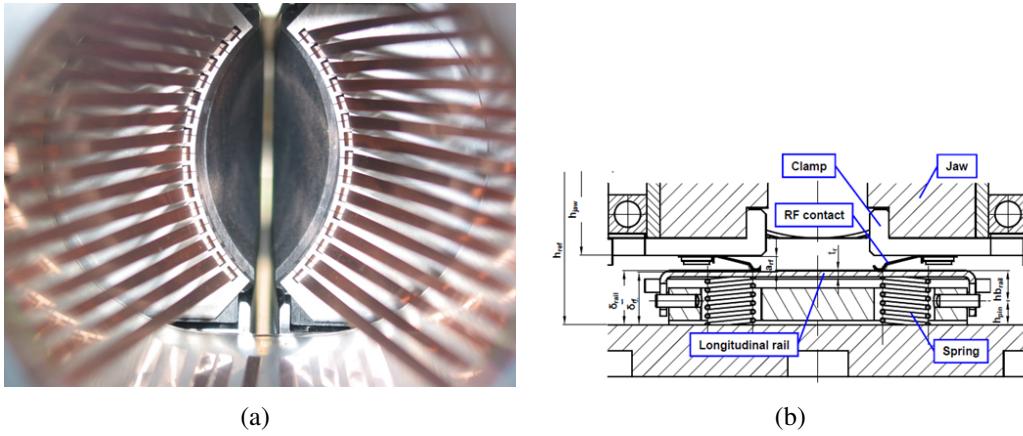


Figure 7.1: Different components of impedance reduction measures in the phase 1 collimator design. 7.1(a) shows the longitudinal RF fingers, ensuring a good conducting path for the beam image currents, and 7.1(b) shows the sliding RF contacts on the collimators jaw. These are intended to minimise the volume seen by the beam, thus minimising any cavity modes that may be excited by the beam at very high frequencies where the beam power spectrum is very small. Images courtesy of A. Bertarelli, CERN.

for more details). These function well as impedance reduction techniques, however have some limitations from a mechanical point of view. In particular, the sliding contacts have been suspected to be a significant producer of dust in the LHC due to the moving physical contact during collimator alignment.

Due to these factors (high transverse impedance due to the resistive wall impedance and problems of dust due to sliding contacts) a phase 2 upgrade of the LHC collimation system has been proposed. This entails two components;

1. The supplementation of the current secondary collimators (the prime contributor to the large transverse impedance) by a phase 2 design using a good conducting material as the jaw material. There will be some loss of mechanical robustness but it is thought that this will not be detrimental to the requirements of machine protection with a suitable choice of material.
2. Replacing the existing sliding RF contacts with a contactless RF system (shown in Fig. 7.2). This is designed to suppress the problem of dust caused by the sliding RF contacts in the phase 1 system by removing the moving physical contacts. This

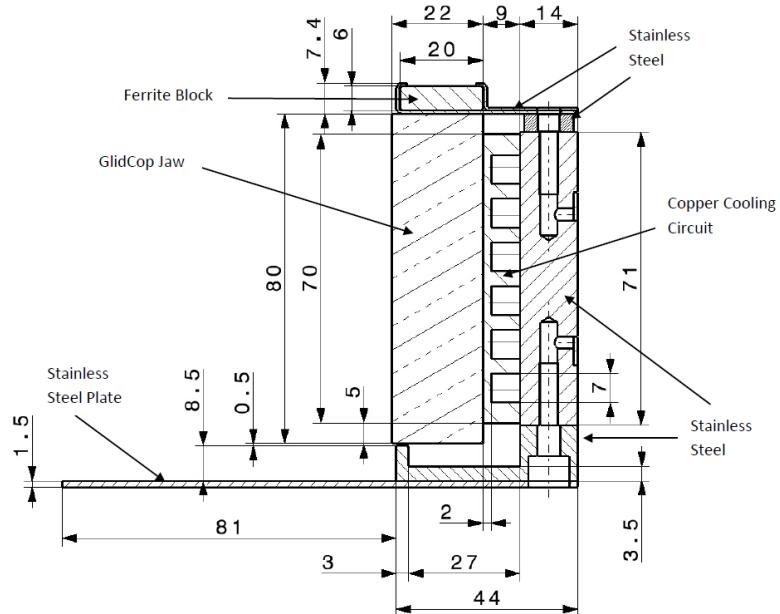


Figure 7.2: The RF system for use in the phase 2 collimation system. The sliding RF contacts of the phase 1 design are replaced with a ferrite damping system. The RF contacts are removed, allowing the beam to see the entire RF cavity, causing resonances at lower frequencies. The Q of these resonances are decreased by the use of ferrite damping tiles (see Sec. 6.6).

increases the volume of the cavity visible to the particle beam, decreasing the frequency of the lowest cavity modes. To counteract these new resonances, ferrite is placed in the cavity to decrease the resulting Q of the resonances.

In this chapter shall be presented an comparison of the different jaw materials proposed for use in the phase 2 secondary collimators. In particular a combination of jaw materials aimed at combining extremely robust materials with highly conductive metals, and the results of full 3D simulations of a TCTP collimator - a tertiary collimator for use in the LHC - which incorporates the ferrite damping system, is compared to the sliding contacts of the phase 1 RF system.

7.2 LHC Phase 2 Secondary Collimator Jaw Material

The phase 2 secondary collimators are proposed as an addition to the current phase 1 secondary collimators. They have stringent mechanical requirements, particularly due to the necessity to withstand impacts by a limited number of bunches in the LHC during injection. In addition they must meet a stringent limit on beam impedance - new devices in the LHC must not increase the total impedance of the machine due to the stability limits imposed due to the existing large transverse and longitudinal impedance. If possible, the effective impedance in the machine should be reduced during operation. The requirements for the material requirements are detailed and summarised in [74].

To meet the strict requirements of the differing physical requirements on the jaw material, both from a mechanical point view and an impedance point of view, a number of different jaw design solutions have been proposed. These include both single material jaw designs, mixtures of composites and pure metals, and variations on a design including ceramic. The proposed jaw material combinations are listed below:

1. GlidCop, a copper composite including aluminium oxide particles. The conductivity is marginally worse than pure copper (see Tab. 7.1), but the addition of the aluminium oxide greatly increases the resistance to thermal softening and increases the strength at high temperatures.
2. Molybdenum - A metal with good mechanical properties and a conductivity comparable to copper.
3. Copper Diamond Composite - A copper composite formed by hot pressing copper with the addition of boron powder and small synthetic diamonds. This is a very mechanically robust material.
4. Molybdenum Diamond Composite - As with the above, a molybdenum composite formed by the use of sintering molybdenum with artificial diamonds.
5. Carbon reinforced carbon (CFC) - The current material of the phase 1 secondary collimators. Included for comparison.

Table 7.1: The electrical conductivity of the different jaw materials proposed for use in the phase 2 design. All results are given for measurements at room temperature (20°C)

| Material | Conductivity (Sm^{-1}) |
|-------------------------------------|----------------------------|
| Glidcop | 5.4×10^7 |
| Molybdenum | 1.87×10^7 |
| Copper Diamond Compositie (CuCD) | 1.25×10^7 |
| Molybdenum Diamond Composite (MoCD) | 5.5×10^6 |
| Graphite | 7×10^4 |

More information on the material choices can be found in [74, 75]. The conductivities of the different materials can be found in Tab. 7.1. The layouts of the various possible jaw designs can be found in Fig. 7.3.

7.2.1 Impedance Studies and Analysis

To analyse the jaw material impedance the Mounet model [35] for 2D infinite parallel plates is used. This model assumes infinite parallel plates with n-layers of material. It supports non-symmetric structures in addition. The representation of this structure is shown in Fig. 7.4. For this model we assume a jaw separation of 4mm (half-width of 2mm), the closest nominal separation of the secondary collimators and hence a worst-case for beam coupling impedance.

The frequency range of concern is determined by the instability mechanism driving the stability limit in the LHC. It has been demonstrated that this range of concern is from 11.8kHz up to some number of GHz [76] in the transverse plane, driven by loss due to tune spread over an optical resonance. This necessitates investigating the transverse beam coupling impedance over a very large frequency range, hence the choice of using an analytical method of investigation.

The beam coupling impedances for the various jaw materials is shown in Fig. 7.5. From the consideration of the longitudinal impedance, the collimator jaw material is not a significant contributor to the machine impedance. The significant concern is the transverse impedance. It can be seen from Figs. 7.5(b), 7.5(c), 7.5(d), 7.5(e) that all the potential

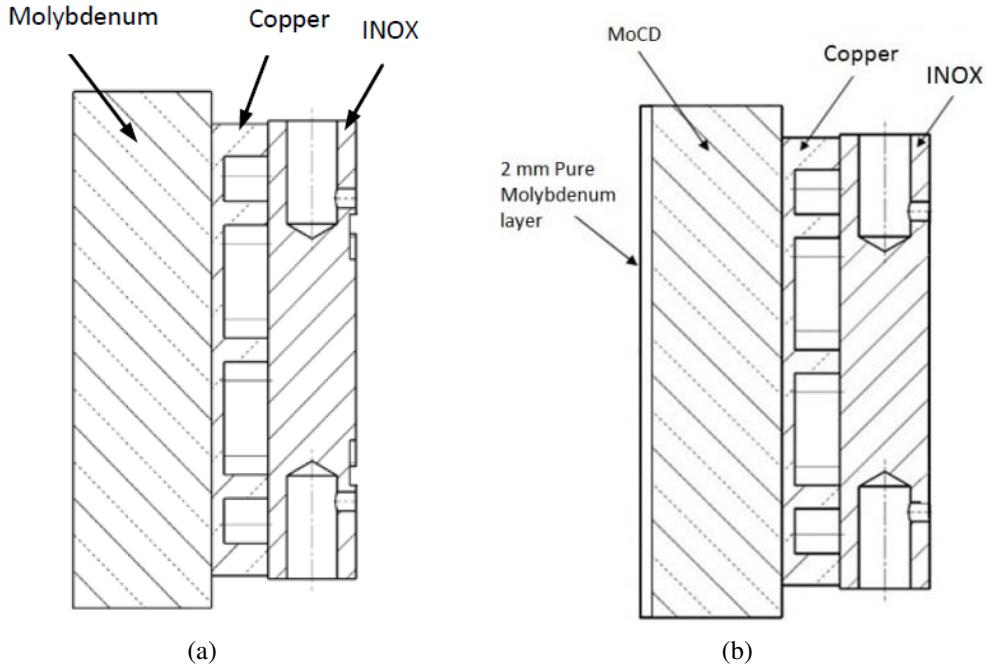


Figure 7.3: A number of the proposed jaw designs for the phase 2 secondary collimators. 7.3(a) shows the jaw made entirely from molybdenum. Glidcop maybe substituted for molybdenum in this design. 7.3(b) shows the jaw made from a mixture of molybdenum diamond composite with a 2mm coating of pure molybdenum on the surface. The composite ensure a mechanically strong jaw, whilst the coating screens the higher resistivity composite and provides a smooth surface on the beam-facing part of the jaw. In this case the composite maybe substituted with copper diamond composite, and likewise the coating may be replaced with GlidCop.

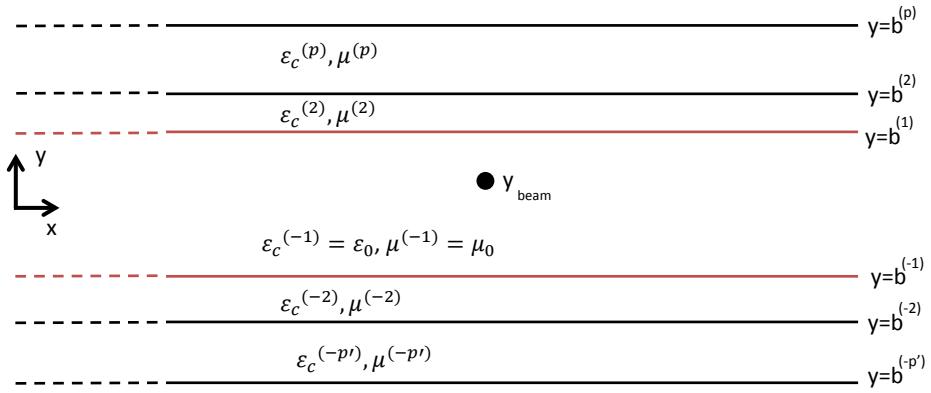


Figure 7.4: The physical model of the Mounet model of parallel plate impedance. Note that the two sides of the structure do not have to be symmetric. The materials maybe any material provided it's frequency dependent properties are well defined.

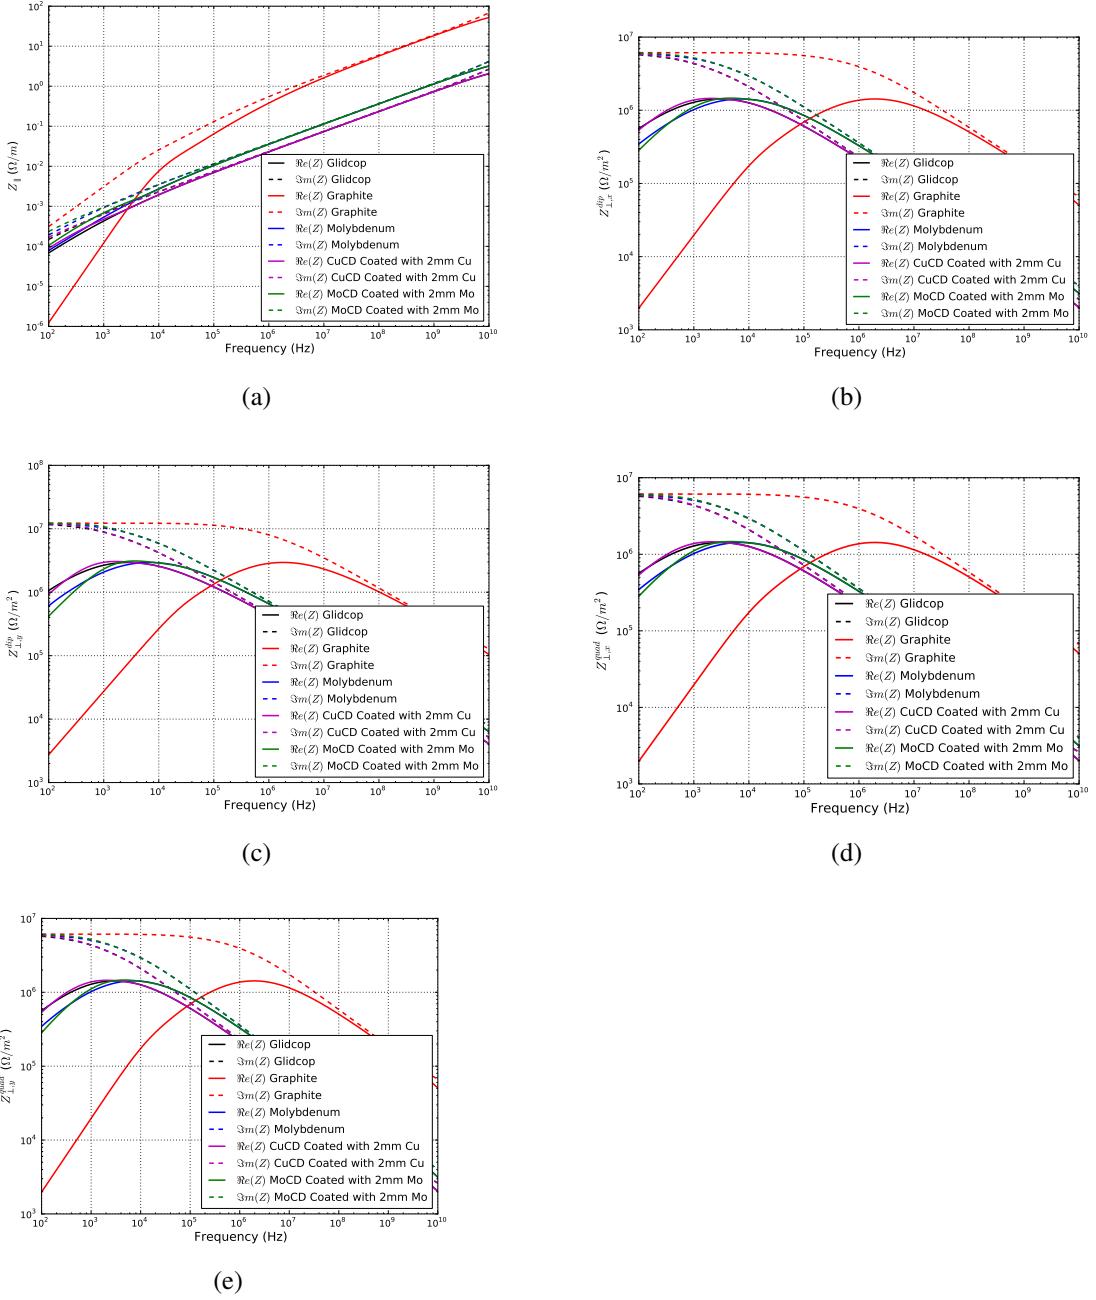


Figure 7.5: The impedances of different jaw materials for the phase 2 secondary collimators. 7.5(a) The longitudinal impedance, 7.5(b) the horizontal dipolar impedance, 7.5(c), the vertical dipolar impedance, 7.5(d) the horizontal quadrupolar impedance and 7.5(e) the vertical quadrupolar impedance.

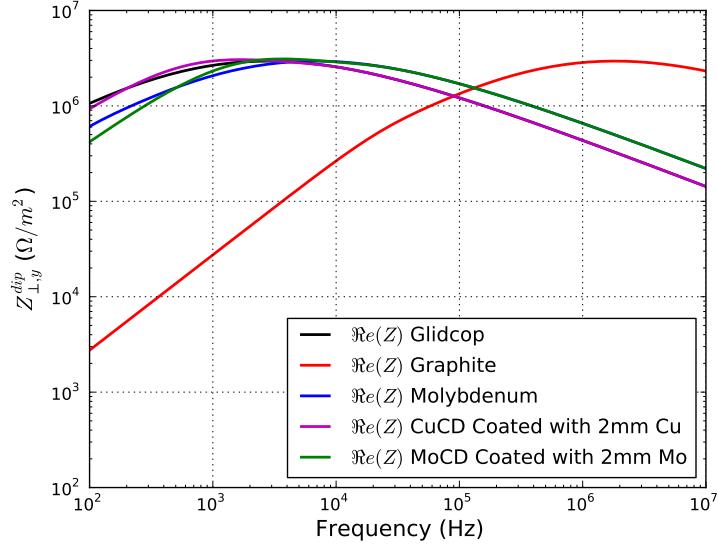


Figure 7.6: The real component of the vertical dipolar impedance of the various collimator jaw materials assuming a 2mm half gap.

jaw materials reduce the imaginary component of the transverse impedance (dipolar and quadrupolar) above 10^3 Hz. By comparison with the change in tune shift discussed in Sec. 3.2.1 it can be seen that this reduces the magnitude of the imaginary component of the tune shift - i.e. the change in betatron tune is reduced.

Conversely, the peak of the real component of the transverse impedance is moved to lower frequencies as the conductivity of the innermost jaw material increases (shown in greater magnitude for the vertical dipolar impedance in Fig. 7.6). Significantly, this causes the high conductivity jaw materials to present a larger real component of the impedance in the important frequency range from $10^4 - 10^5$ Hz. Reviewing Sec. 3.2.2 it can be seen that this produces a decrease in the growth time of any associated instability.

7.3 TCTP Impedance Studies

As part of the ongoing collimation upgrade in the LHC, several advances in the LHC design have been proposed. These are as follows:

1. For the reasons given in Sec. 7.2, the jaw material of the collimators, specifically the secondary collimators is under review in an effort to reduce the beam impedance, improve cleaning efficiency and continue the present robustness and excellent performance of the LHC collimation system.
2. The inclusion of on collimator BPMs. This is due to the present method of alignment of the collimators relying on investigating the beam loss patterns in the LHC as a function of collimator aperture being a very time intensive procedure due to the inherently slow nature of beam loss. The use of on collimator BPMs allows a near instantaneous feedback on the position of the beam relative to the collimator jaw thus greatly increasing collimator setup time [77, 78].
3. A new RF system (Shown in Fig. 7.2) to reduce the side effects of the sliding RF contacts used in the phase 1 collimators.

As part of the upgrade, a series of TCTP collimators shall be installed in the LHC in replacement of a number of tertiary collimators (TCTs). In total, 8 TCTP and 1 TCSG will be added to the LHC. These collimators are in part intended to act as a test for two of these upgrades, the use of on collimator BPMs and the new RF system [79]. As part of the ongoing effort to limit increases to the LHC machine impedance (shown in Tab. 7.2) and due to continuing concerns about beam-induced heating [80, ?], all new devices to be placed in the LHC must be examined for their effect on the beam and as a possibly luminosity limiter in the LHC. Due to the large number of phase 2 secondary collimators that are planned to be put in the LHC (30 additional secondary collimators to be installed during long shutdown 2) it is vital that the new collimator design, especially the new RF system is verified for its efficacy as an impedance reduction technique.

7.3.1 TCTP Collimator - Design and Geometry

The TCTP is a tertiary type collimator with a jaw made of tungsten. The principle components of interest from a beam impedance reduction point of view are the longitudinal

Table 7.2: The impedance budgets (both transverse and longitudinal) for LHC at injection and collisions. Taken from the LHC Design Report [1]

| Beam Operation | Longitudinal $\Im m(Z_{\parallel}/n)$ (Ω) | Transverse $\Im m(Z_{\perp})$ (Ω/m) |
|--------------------------|--|--|
| Total Broadband (450GeV) | 0.07 | 1.34 |
| Total Broadband (7TeV) | 0.076 | 2.67 |

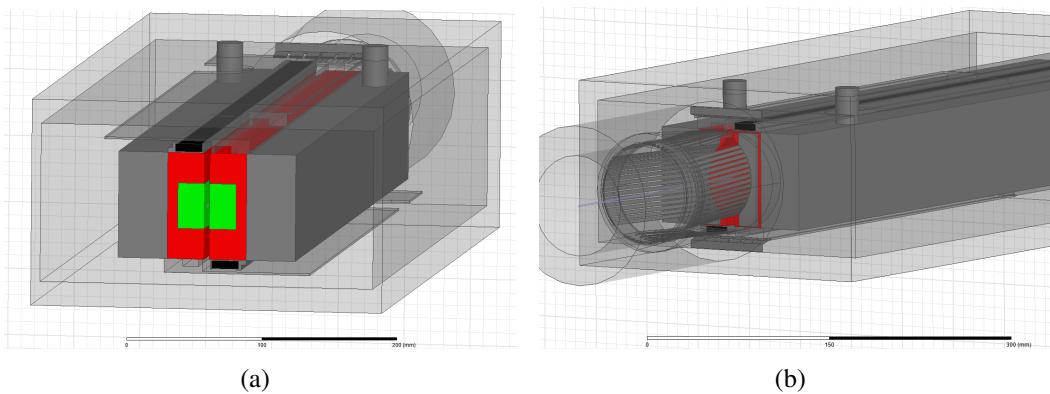


Figure 7.7: The TCTP collimator has a number of important impedance reduction techniques present in its design. The RF system, 7.7(a), replaces the sliding RF contacts of the phase 1 design, using ferrite tiles (shown in black) to reduce the resonant Q of the structure. The longitudinal RF fingers, shown in 7.7(b), provide a good conducting path for the beam image current in the transition from the beam pipe to the collimator jaw.

RF fingers that cover the transition from the beam pipe to the collimator structure, and the RF system utilising ferrite blocks and a screen structure, shown in Fig. 7.7(a).

The RF system is designed to work in the following way, where comparison is given to the phase 1 RF system to clarify the differences and the design choices made. The phase 1 sliding contacts adequately masked the surrounding vacuum cavity from the beam, causing the resonant modes of the structure to be dominated by the geometry of the internal structure of the collimator jaw. Due to the small dimensions this volume the resonant frequencies are thus very high (in the realm of gigahertz) where the beam spectrum is very small and thus the beam-structure interaction is relatively small thus avoiding both impedance driven instabilities due to cavity modes and beam-induced heating. However the sliding contacts are believed to produce a large quantity of dust which is problematic for beam losses.

Conversely, the TCTP RF system removes the sliding contacts to remove the dust problem. This allows the beam to 'see' the entire vacuum tank of the collimator. This increases the characteristic dimensions driving the resonant frequency modes, thus lowering the minimum frequency of the cavity modes. This moves the frequency of the cavity modes into an area over the beam power spectrum where the spectrum is comparable to the DC beam current in the machine. To counteract this the Q of the cavity modes is reduced by the placement of ferrite tiles in the device to act as a damping material. This strongly reduces the peak height of the impedances thus reducing their effect on both instability and beam-induced heating.

7.3.2 Impedance Simulations and Results

The impedance of the TCTP collimator is examined through the use of simulation codes. In order to verify the simulation results it was decided to use both a time domain and a frequency domain code, in this case CST Particle Studio[cite] for the time domain and Ansoft HFSS[cite] for the frequency domain. Due to the reduced simulation time for time domain simulations compared to frequency domain simulations (which must be evaluated mode by mode to correctly evaluate the eigenmodes), the preliminary comparisons

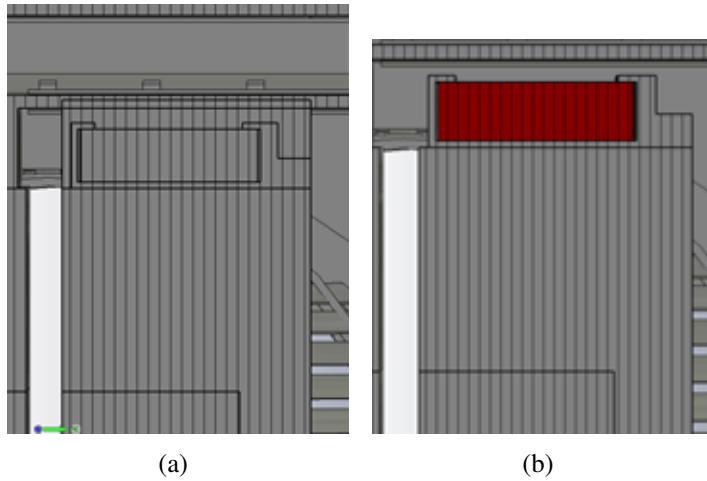


Figure 7.8: The different RF systems considered for the TCTP collimator. 7.8(a) shows an RF system similar to the phase 1 RF system. In these simulations the sliding RF contacts are replaced by a perfect connection - for frequencies lower than 2-3GHz this is a good approximation and greatly simplifies the simulation model. 7.8(b) shows the RF circuit complete with ferrite. Two further variants may be considered, that where the ferrite is replaced by either vacuum (to identify how the ferrite damps the otherwise present modes) and replacing the ferrite with PEC (to see whether it is the ferrite or the small aperture that reduces the coupling of the beam to the surrounding vacuum tank).

are done using the time domain code and the most promising solutions are subsequently investigated in depth using the frequency domain model.

For this comparison we investigate a number of different designs of the RF system for comparison to the ferrite damping solution chosen for construction;

1. The phase 1 sliding RF contacts, to provide comparison to the existing RF system.
Shown in Fig. 7.1.
2. The proposed RF system including the ferrite damping tiles and the RF screen as shown in Fig. 7.2.
3. The proposed RF system without the ferrite damping tiles. This is to investigate the benefit of including the ferrite tiles.

The three different systems are shown in Fig. 7.3.2. The impedance results for these three options are shown in Fig. ?? simulated in CST Particle Studio. It can clearly be

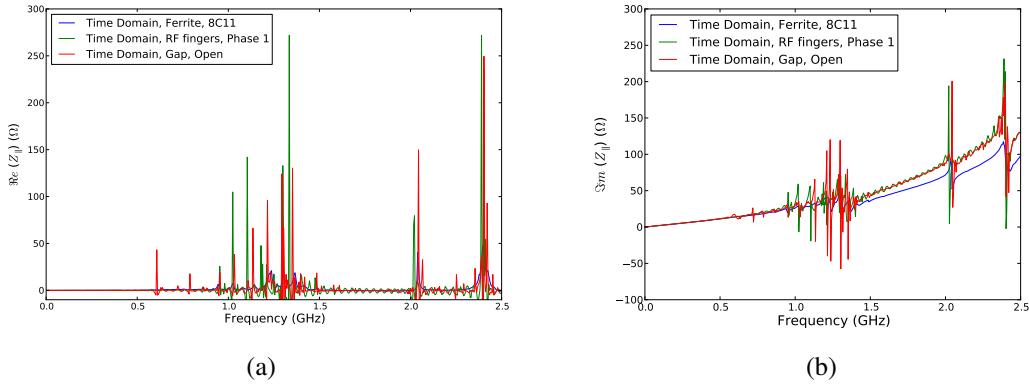


Figure 7.9: The longitudinal impedance of the TCTP collimator for a number different configurations. Shown is the system using the ferrite damping system (ferrite being 8C11 in this case), RF fingers as in phase 1, and the RF system with the ferrite replaced by PEC. The real 7.9(a) and imaginary 7.9(b) components are shown.

seen the differences between the two RF systems. The phase 1 RF system screens the surrounding vacuum tank from the beam, meaning any cavity modes occur at a relatively high frequency, above 1GHz. The phase 2 system allows the beam to see the vacuum cavity, decreasing the lowest frequency cavity mode. The presence of the ferrite in this system subsequently strongly reduces the Q of these resonances, reducing the impedance. Both the real and imaginary longitudinal impedance is strongly reduced as a result. Similar results have been observed in the transverse plane [cite salvant presentation].

7.3.3 Beam-Induced Heating

As seen in Sec. 7.3.2, the longitudinal impedance of the phase 2 RF design indicates a significant number of beam impedance resonances below 1GHz. Although their contribution in the imaginary component of the beam coupling impedance is not significant enough to be of concern from a stability point of view, the resonances may present a problem from the point of view of beam-induced heating. To fully investigate both the effectiveness of the ferrite in damping the cavity resonances and to identify the locations of the power loss the phase 2 structure is investigated using the frequency domain code HFSS.

For these simulations we simulate half of the structure (due to the reflective symmetry in the longitudinal plane), using alternatively perfect E-field (enforcing perpendicular

electric fields at the boundary) and H-field (enforcing perpendicular magnetic fields at the boundary) boundary conditions at the symmetry plane to indentify and characterise the eigenmodes up to 2GHz (to cover the majority of the beam spectrum). The structure with and without ferrite is simulated to characterise the effect of the ferrite in damping the cavity modes. Simulations are carried out using the following parameters:

- Using a 2nd order basis function solver to ensure good resolution of the fields for R/Q and localised loss calculations.
- The ferrite is assumed to be 4A4, materials data is imported from an external data file and interpreted fit is used between data points. An analytical model (see [cite entry] for details).
- We simulate using a single jaw seperation, in this case a half-seperation of 2mm. This is an extremely close jaw seperation, closer in fact than the TCTP collimator would be placed at, but similar to that that the phase 2 collimators would be placed at. This allows some prediction of a worst case scenario for the TCTP and also an analysis of the efficacy of the RF system for the type of operational parameters the phase 2 secondary collimators would be placed at.
- The mesh was auto-generated by the HFSS mesh generator, and run for a convergence criteria of a 0.5% convergence of the eigenmode frequency between two successive meshes with a 30% refinement of the mesh between successive solutions.

Here we shall evaluate the resonances as a whole, or a few key resonances from a heating point of view. For a complete listing of the eigenmodes please see App. A for a complete breakdown of the TCTP eigenmode simulations. To have a comprehensive review of the heating we consider the following heating possibilities

- A beam harmonic occuring exactly on the resonant frequency with a certain bunch profile. Here we consider gaussian and \cos^2 bunch profiles. Parameters for a number of different beam operating modes (summarised in Tab. 7.3) are considered.

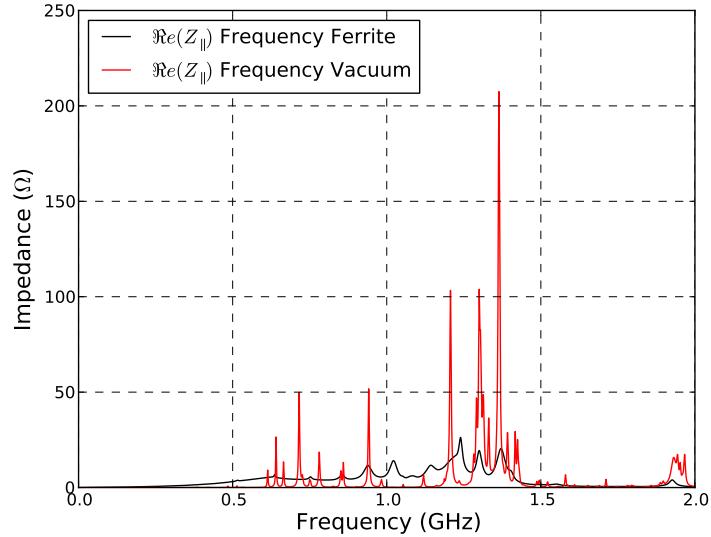


Figure 7.10: The real component of the longitudinal impedance for the TCTP collimator as simulated in the frequency domains for the case with and without ferrite damping tiles. The strong resonances present in the case without ferrite can be seen to be strongly damped when the ferrite tiles are added. However a substantial broadband component occurs in addition due to the broadened resonance peaks.

- Taking theoretical spectra for both 50ns and 25ns bunch spacings. In this case we consider the heating for both nominal operational parameters (1ns bunch length), running conditions from 2012 (bunch length between 1.0-1.5ns) and for HL-LHC parameters. These parameters are summarised in Tab. 7.3. Different bunch profiles are considered - gaussian and \cos^2 to account for high frequency lobes observed in measured beam spectra.

The heating estimates assuming on resonance beam harmonics can be seen in Tab. 7.3.3 for a variety of bunch lengths between 1-1.5ns assuming gaussian and \cos^2 bunch distributions. The same data for the TCTP without the ferrite damping tiles can be seen in Tab. 7.3.3. A number of things area immediately evident; The addition of the ferrite drastically reduces the power loss in the TCTP collimator, by a factor of ≈ 10 . In addition, the consideration of the higher frequency lobes in the heating estimates for the TCTP is significant as can be seen by the large differences (factor ≈ 3 between gaussian and \cos^2

Table 7.3: The LHC operational parameters considered for heating estimates for the TCTP. Operational parameters include the nominal LHC parameters for 25ns bunch spacing, the peak operational intensity for 50ns bunch spacing used in 2012, and the two possible HL-LHC operational schemes, using both 25ns and 50ns bunch spacing. Here the bunch length is assumed to encompass the 4σ gaussian width.

| Operational Mode | τ_b (ns) | t_{bunch} (ns) | N_b | $n_{bunches}$ |
|-----------------------------|---------------|------------------|-----------------------|---------------|
| 50ns, 2012 LHC Operation | 1.2 | 50ns | 1.7×10^{11} | 1380 |
| 25ns, Nominal LHC Operation | 1.0 | 25ns | 1.15×10^{11} | 2808 |
| HL-LHC 25ns | 1.0 | 25ns | 2.0×10^{11} | 2808 |
| HL-LHC 50ns | 1.0 | 50ns | 3.3×10^{11} | 1380 |

Table 7.4: The power loss of a the TCTP collimator with ferrite for a number of operational modes in the LHC and HL-LHC assuming each cavity mode falls upon a beam harmonic. All losses are in watts using the parameters found in Tab. 7.3

| τ_b (ns) | 50ns, 2012 | | 25ns nominal | | 50ns, HL-LHC | | 25ns, HL-LHC | |
|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | $P_{loss,g}$ | $P_{loss,c}$ | $P_{loss,g}$ | $P_{loss,c}$ | $P_{loss,g}$ | $P_{loss,c}$ | $P_{loss,g}$ | $P_{loss,c}$ |
| 1.0 | 2.8 | 7.1 | 5.3 | 15 | 10 | 27 | 16 | 41 |
| 1.1 | 1.9 | 5.1 | 3.6 | 9.8 | 7 | 19 | 11 | 30 |
| 1.2 | 1.4 | 3.7 | 2.5 | 7.0 | 5 | 13 | 7.7 | 21 |
| 1.3 | 0.9 | 2.7 | 1.8 | 5.0 | 4 | 10 | 5.5 | 15 |
| 1.4 | 0.7 | 1.9 | 1.3 | 3.7 | 3 | 7 | 3.9 | 11 |
| 1.5 | 0.5 | 1.4 | 1.0 | 2.7 | 2 | 5 | 2.9 | 8.2 |

profiles). In this case the usefulness for the ferrites is clear.

Considering the heating taking beam harmonics separated by the inverse of the bunch separation ($40MHz$ for $t_{bunch} = 25ns$ and $20MHz$ for $t_{bunch} = 50ns$) we acquire the results presented in Tab. 7.3.3 and Tab. 7.3.3 respectively, again for a variety of LHC operational parameters and assuming either a gaussian or a \cos^2 longitudinal bunch profile. In this case it can be seen that the power loss for the ferrite case is larger than that experienced by the case without ferrite. This can be understood due to the fixed frequencies of the beam harmonics - if a high-Q resonance does not occur at or near a beam harmonic then the beam does not couple to the resonance. Due to the broad resonance peaks of the ferrite damped TCTP design the beam may couple to the resonance even if the resonance frequency of the cavity mode does not match the beam harmonic precisely due to the

Table 7.5: The power loss of a TCTP collimator without the ferrite damping tiles for a number of operational modes in the LHC and HL-LHC assuming each cavity mode falls upon a beam harmonic. All losses are in watts using the parameters found in Tab. 7.3

| τ_b (ns) | 50ns, 2012 | | 25ns nominal | | 50ns, HL-LHC | | 25ns, HL-LHC | |
|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | $P_{loss,g}$ | $P_{loss,c}$ | $P_{loss,g}$ | $P_{loss,c}$ | $P_{loss,g}$ | $P_{loss,c}$ | $P_{loss,g}$ | $P_{loss,c}$ |
| 1.0 | 21 | 52 | 41 | 100 | 81 | 197 | 123 | 301 |
| 1.1 | 15 | 38 | 29 | 72 | 56 | 143 | 86 | 218 |
| 1.2 | 10 | 28 | 20 | 53 | 40 | 105 | 61 | 160 |
| 1.3 | 7.7 | 21 | 15 | 39 | 29 | 78 | 43 | 119 |
| 1.4 | 5.4 | 15 | 10 | 30 | 20 | 60 | 31 | 91 |
| 1.5 | 4.0 | 12 | 7.3 | 23 | 15 | 46 | 22 | 70 |

Table 7.6: The power loss of a TCTP collimator with ferrite for a number of operational modes in the LHC and HL-LHC assuming beam harmonics spaced at the reciprocal of the bunch spacing. All losses are in watts using the parameters found in Tab. 7.3

| τ_b (ns) | 50ns, 2012 | | 25ns nominal | | 50ns, HL-LHC | | 25ns, HL-LHC | |
|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | $P_{loss,g}$ | $P_{loss,c}$ | $P_{loss,g}$ | $P_{loss,c}$ | $P_{loss,g}$ | $P_{loss,c}$ | $P_{loss,g}$ | $P_{loss,c}$ |
| 1.0 | 9.5 | 18 | 9.1 | 17 | 36 | 68 | 27 | 53 |
| 1.1 | 7.4 | 14 | 7.1 | 14 | 28 | 55 | 21 | 42 |
| 1.2 | 5.9 | 11 | 5.6 | 11 | 22 | 45 | 17 | 34 |
| 1.3 | 4.8 | 9.6 | 4.5 | 9.2 | 18 | 36 | 14 | 28 |
| 1.4 | 3.9 | 8.0 | 3.7 | 7.5 | 14 | 29 | 11 | 22 |
| 1.5 | 3.2 | 6.6 | 3.0 | 6.3 | 12 | 25 | 9.1 | 19 |

low-Q of the resonance.

A judgement must be made with regards as to which simulations provide a more realistic safety margin for operation in the LHC. For this we must consider both the worst case scenarios in each case and their likelihood. Considering the worst cases in both the case with and without ferrite we can see that for any given operational mode the worst case for the collimator without ferrite is substantially worse than that with ferrite. Considering the possibility of inaccuracy of the frequencies of the eigenmodes or their Q factors it is typically considered prudent to take the worst case scenario to avoid the need for costly repairs. In the case of adding ferrite it is possible to simply remove the ferrite if it is proved detrimental to operation, therefore present installation plans for the TCTP collimator include the ferrite damping system.

Table 7.7: The power loss of a TCTP collimator without ferrite for a number of operational modes in the LHC and HL-LHC assuming beam harmonics spaced at the reciprocal of the bunch spacing. All losses are in watts using the parameters found in Tab. 7.3

| τ_b (ns) | 50ns, 2012 | | 25ns nominal | | 50ns, HL-LHC | | 25ns, HL-LHC | |
|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | $P_{loss,g}$ | $P_{loss,c}$ | $P_{loss,g}$ | $P_{loss,c}$ | $P_{loss,g}$ | $P_{loss,c}$ | $P_{loss,g}$ | $P_{loss,c}$ |
| 1.0 | 2.2 | 6.0 | 2.4 | 6.6 | 8 | 22 | 7.2 | 20 |
| 1.1 | 1.5 | 4.2 | 1.6 | 4.5 | 6 | 15 | 4.7 | 14 |
| 1.2 | 1.1 | 2.9 | 1.0 | 3.1 | 4 | 11 | 3.1 | 9.5 |
| 1.3 | 0.8 | 2.1 | 0.7 | 2.2 | 3 | 8 | 2.1 | 6.7 |
| 1.4 | 0.5 | 1.5 | 0.5 | 1.6 | 2 | 6 | 1.5 | 4.7 |
| 1.5 | 0.4 | 1.2 | 0.3 | 1.1 | 1 | 5 | 1.0 | 3.5 |

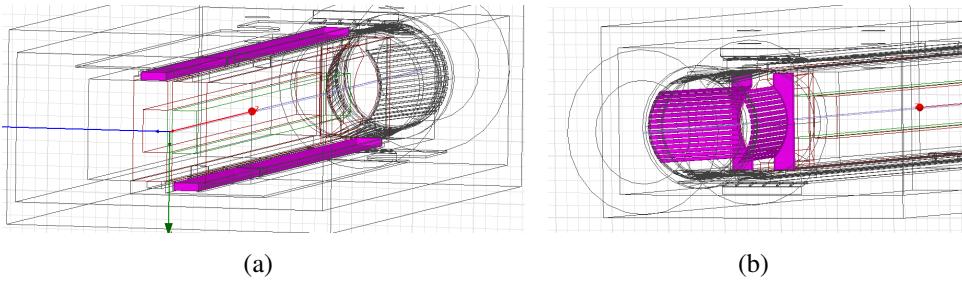


Figure 7.11: The different thermally sensitive components of the TCTP collimator highlighted in purple. 7.11(a) shows the ferrite tiles, and 7.11(b) the longitudinal RF fingers.

Location of Power Deposition

Due to the poor cooling available in vacuum (cooled by radiative heating only). Although surrounded by a housing/in contact with surrounded components, the thermal contact between different components within the collimator is poor) it is important to know of the proportion of beam-induced power loss that is lost in thermally sensitive areas. These are areas where large increases in temperature can either lead to direct physical damage (as is the case with RF fingers) or may lead to a worsening physical condition of the collimator (if the ferrite tiles go above their Curie temperature). The components are highlighted in Fig. 7.3.3

The losses on or in different surfaces and volumes is calculated using the loss calculations within HFSS, and then normalised to the total losses in the TCTP structure for each mode. This produces a variety of losses depending on the field pattern of the mode.

Table 7.8: The percentage of power loss lost in thermally sensitive components in the TCTP.

| Component | Percentage of Power Loss |
|-------------------------|--------------------------|
| Whole Device | 100 |
| Ferrite Tiles | 5 |
| Longitudinal RF Fingers | 4 |

Table 7.9: The power loss in the ferrite of the TCTP collimator. The most pessimistic of the losses estimated in Tab. 7.3.3 and Tab. 7.3.3 for the 1.0ns case. All losses are in watts using the parameters found in Tab. 7.3

| τ_b (ns) | 50ns, 2012 | 25ns nominal | 50ns, HL-LHC | 25ns, HL-LHC |
|---------------|--------------|--------------|--------------|--------------|
| | $P_{loss,c}$ | $P_{loss,c}$ | $P_{loss,c}$ | $P_{loss,c}$ |
| 1.0 | 0.9 | 0.9 | 3.4 | 2.7 |

These are collated in App. A. To provide a conservative estimate of the power load we take the highest proportions of power loss of all the modes and assume this is the case for all modes. The percentages for the total device, the ferrite tiles and the longitudinal RF fingers are shown in Tab. 7.3.3.

The thermal behaviour as a result of this power load can be analysed using design software such as ANSYS [81]. The results of these thermal simulations can be seen in [5], a summary of which is given in Fig. 7.3.3. The important figure of merit is in whether the temperature of the ferrite increases beyond its Curie temperature. For the TT2-111R, T_c 375°C [82]. The power loss for the worst cases of the nominal, HL-LHC and HL-LHC parameters without crab cavities (bunch length 0.5ns rather than 1.0ns) is considered, in this case with a factor of two margin of error included to be conservative (i.e. we assume double the power on the ferrite tiles), and it can be seen that the temperature increase for even the worst case results in the temperature being significantly below the Curie temperature for this material.

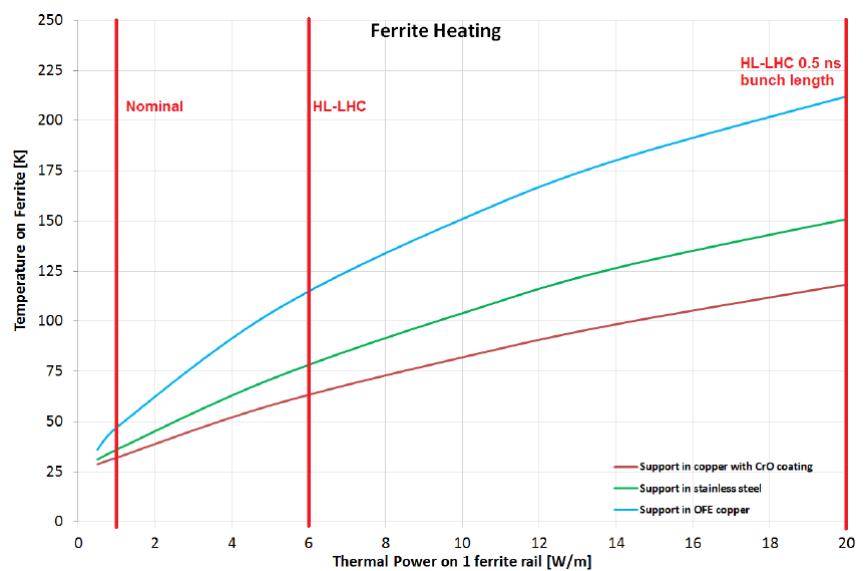


Figure 7.12: The temperature increase of the ferrite damping tiles in the TCTP collimator under a number of beam operating conditions and for a number of different jaw support materials. Plot taken from [5].

Chapter 8

LHC Injection Kicker Magnet

The injection kicker magnets in the LHC are part of the injection system for the LHC machine. This system is used to match the trajectory of the injected beam to that of the stable beam path in the accelerator. An example schema for the LHC can be seen in Fig. 8.1. The system typically uses two components, a septum, which may provide a slowly rising and falling time, but strong, field, and kickers, which may provide a rapidly rising and falling, but comparatively weak field, to match the injected beam to the correct trajectory. Similar components are used for the extraction of beam also.

By design kickers must always be visible to the beam due to the need to quickly fire to apply their kick. In addition the need for a highly homogeneous field whilst the kick is applied, as well as the strength of the field necessitates that the aperture for kickers

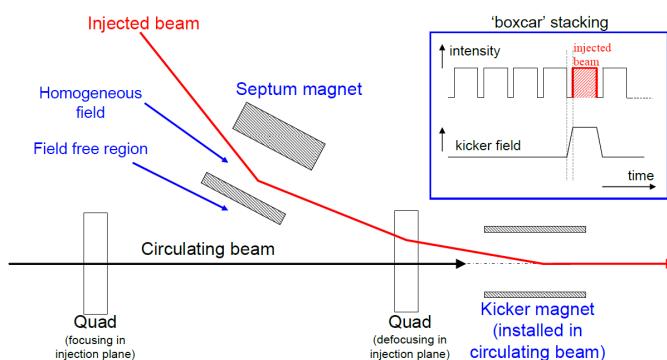


Figure 8.1: An example layout of a injection system for an accelerator. Taken from [6]

Table 8.1: MKI Operational parameters

| | | |
|----------------------------------|-------------|----------|
| Number of Kickers per System | 4 | |
| Kick strength per magnet | 0.3 | T.m |
| Magnet beam aperture (diameter) | 38 | mm |
| Characteristic Impedance | 5 | Ω |
| Operating charging voltage (PFN) | 54 | kV |
| Field flat top ripple | $< \pm 0.5$ | % |
| Field flat top duration | up to 7.86 | μ s |
| Field rise time 0.5%-99.5% | 0.9 | μ s |
| Field fall time 99.5%-0.5% | 3.0 | μ s |
| Magnet length | 2.7 | m |

often be very narrow, meaning they are in close proximity to the beam. This leads to two concerns - that the close proximity of the beam to a device that may be made of either a highly lossy material [83, 84, 85] or of a source of strong geometrical impedance [86] may be source of impedance that drives instabilities in the beam [impedance of the SPS], and secondly that the large real component of ferrite kicker magnets may be subject to intense heating in high beam current machines [85].

8.1 LHC Injection Kicker Magnets

The LHC injection kicker magnets (LHC-MKIs, or MKI) are a 3m long travelling wave transmission line kicker magnet (ferrite length 2.7m). For LHC there are two injection regions, at near IPs 2 and 8, each consisting of an septa system and four MKIs injecting vertically into the machine (The position of the LHC injection systems is shown in Fig. 8.1). As a transmission line magnet the magnet is constructed of a c-core ferrite yoke, segmented by alternating HV and ground plates capacitively coupled together by ceramic capacitor plates. The pulse is generated in a pulse forming network (PFN), stationed above ground, which is subsequently carried by a cable with a characteristic impedance of 5Ω , matching the characteristic impedance of the MKI. The performance parameters of the magnets rise time, field strength and homogeneity are given in Tab. 8.1 [?].

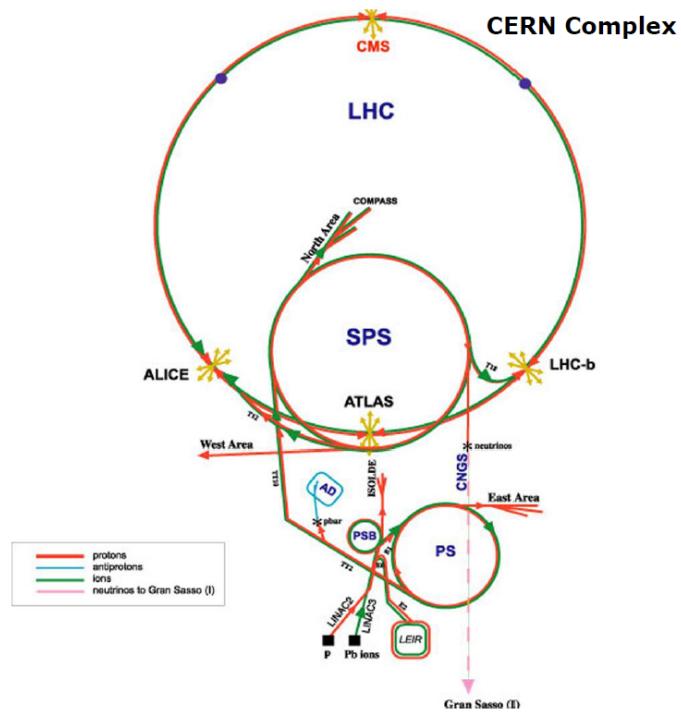


Figure 8.2: The location of the LHC injection systems in the LHC ring.

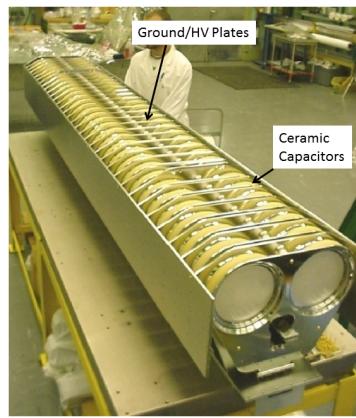


Figure 8.3: 8.1 A cross section of an MKI. Visible are the alternating HV and ground plates, separated by capacitor plates. The HV drive plate and the ground return can be seen in the c core of the ferrite yoke.

8.1.1 Development of the LHC-MKI Beam Screen

During the commissioning of the CERN accelerator complex for LHC type beam with 25ns, 50ns and 75ns bunch spacing, drastic heating and outgassing was observed in the SPS extraction kicker magnets (MKEs) [85]. During an extensive measuring campaign, it was deduced that this was due to extensive beam-induced heating due to the large real component of the longitudinal impedance of the MKEs. Subsequently a number of retroactive impedance reduction methods were proposed and evaluated for their effectiveness in reducing the longitudinal impedance [70].

These experiences motivated some debate on the need for a beam screen for the LHC-MKIs [87, 88], which ultimately was implemented in the final design. The beam screen is composed of a ceramic pipe housing up to 24 screen conductors - conductive wires which extend the length of the magnet, connected directly to the LHC beam pipe at one end, and capacitively coupled at the other. A scheme involving printed conductive strips on the inside surface of the ceramic was considered but was not implemented due to extensive tracking and electrical breakdown between the strips during firing of the kickers. The capacitive coupling is required due to the short rise time requirement of the kicker field - direct connections at both ends would create a faraday cage, causing the characteristic rise time of the system to dramatically increase. In this case electrical simulations indicate that this must be the pulse input end, i.e. the upstream end of the kicker [88]. This will become relevant during the evaluation of heating patterns of the MKI during operation.

The use of the capacitive coupling gives rise to a discontinuity of the conducting path of the beam image current. This gives rise to the possibility of exciting resonances in the surrounding structure of the image current path. In this case, resonant modes of a characteristic frequency due to the screen conductors acting as $n\lambda/4$ resonators. To damp these low frequency modes (the screen conductors are some 3m in length), a series of ferrite (NiZn) toroids is placed at each end of the beam screen to damp these modes [89, 90, ?].


During testing and conditioning of the MKIs it was discovered than there was still significant electrical breakdown/sparking occurring during firing. Electrical simulations and

measurements indicated that above a PFN voltage of 30kV large quantities of discharge were observed originating from the screen conductors. In particular, the highest voltage was found to occur on the screen conductors closest to the HV busbar [88]. Due to the operational voltage requirements a solution had to be found. It was decided to remove the screen conductors exposed to the highest voltages (those closest to the HV busbar) in an effort to reduce the number of discharges. Experiments showed that removing the 9 conductors closest to the HV busbar increased the PFN voltage reached before discharges began to 57kV, above the required 54kV to meet the design parameters for the MKI. Measurements demonstrated that this would worsen the longitudinal beam impedance but this was determined to not be large enough to pose a problem from the point of view of beam induced heating [88].


8.1.2 Observations of heating during 2011 and 2012 until Technical Stop 3

Beginning with the increasing intensity in the LHC during operation in 2011 a number of devices within the LHC were observed to be heating [?, 80]. Observations and calculations demonstrated a strong relationship between the observed heating and the increasing intensity (first the number of bunches, then the increase in bunch population) indicating that the source of the heating was due to the stored beam interacting strongly with the impedance of many structures - evidenced also by the deteriorating vacuum in vacuum sensitive components also. A number of key devices were observed to be exposed to significant heating, in particular devices around the injection region (injection projection collimators, injection kickers, VMTSA (a two beam vacuum interconnect in the injection region)) and some small insertion devices (ALFA roman pot), as explained at the Evian 2011 workshop [80] and Chamonix 2012 [?].

The heating of the LHC-MKIs in particular is shown in Fig. 8.1.2. Some important notes about the heating can be made, firstly that MKIs 8b and 8d both experience the strongest heating, MKI8d in particular demonstrating much higher heating, experiencing

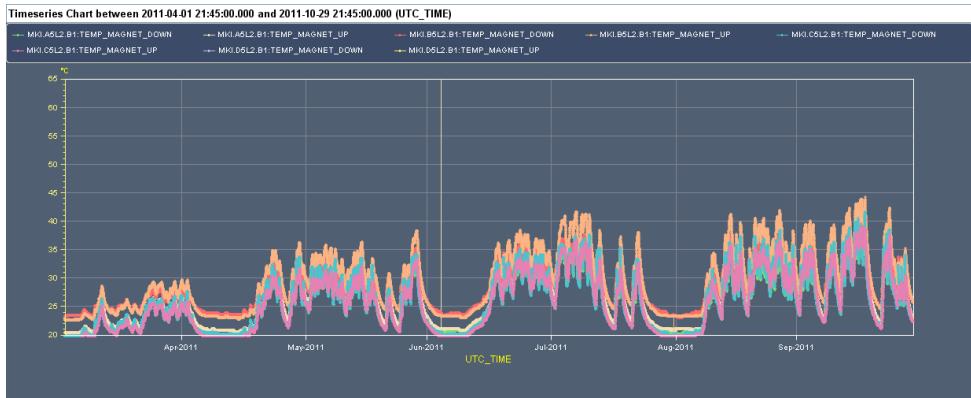

(a)

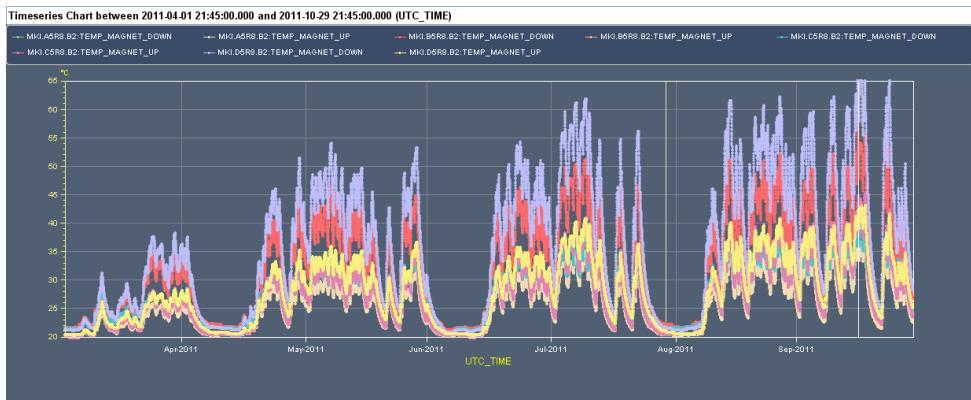

(b)

Figure 8.4: The heating of the MKIs at 8.4(a) IP2 and 8.4(b) IP8 during 2011 in the LHC. Note MKI8b and MKI8d experience significantly more heating than the other MKIs.

temperatures $\approx 20^\circ\text{C}$ higher than that experienced by the other MKIs. Secondly, that the cooling time to return below the interlock temperature is very long (on the order of 4 hours [91]), indicating a large portion of the tank is heating, and additionally that if the temperature reached is detrimental to magnet operation, the necessary cool-down time will be substantial enough to effect machine operational schedules. It can also be seen that the peak temperature only gets worse as the beam intensity is increased.

The temperatures in MKIs are measured using 4 PT-100 thermocouples, placed in the beam pipe up and down stream, and on the outermost ground plates up and down stream, shown in Fig. 8.1.2. Due to the component of concern in the MKI being the ferrite yoke of the kicker but there being no direct temperature measurement on this component, one difficulty in analysing the heating of the MKI is to identify the temperature of the ferrite

Figure 8.5: The location of the temperature measuring thermocouples in the MKI. The upstream end is towards the capacitive coupling end of the beam screen.

yoke which corresponds to which temperature at the points of measurement. This is a problem which has been analysed in depth in [92], in particular using field strength from kicks under a softstart condition (the firing of the magnet with no beam to inject), and inferences from both the kick strength measured in correspondance to the temperatures, and the rise time of the kicker field. Current analysis has given a certain margin of safety to the current interlock level, but due to the possible damage that may be done due to a misinjection of the beam this is very conservative, still requiring a few hours of cool down time between injections.

Prior to technical stop 3 in 2012 there were 2 configurations of the beam screen in the LHC-MKIs - 7 MKIs are in place with 15 tapered screen conductors, the 9 screen conductors closest to the HV busbar having been removed due to the electrical breakdown concerns mentioned in Sec. 8.1.1. A single MKI, MKI8c is fitted with 24 screen conductors, 15 tapered as in the other MKIs, and 9 shortened screen conductors (trimmed such they do not overlap with the external metallization at the capacitively coupled end). This was found to reduce the induced voltage in the screen conductors closest to the HV busbar, but not significantly improve the beam coupling impedance of the MKI.

8.2 Simulations and Measurements of the MKI with 15 Screen Conductors

To begin an analysis of the heating of the MKIs, and to verify the use of simulations as a tool for evaluating different designs of the MKI impedance reduction methods it was important to measure an existing MKI configuration as a benchmark. Due to the expected low beam coupling impedance of the MKI even with 15 screen conductors (on the order of 100Ω longitudinal beam coupling impedance) it was decided to do the measurements using the resonant coaxial wire method, described in Sec. 4.1.2. This method limits the

frequency resolution of the measurements ($\Delta f = c/\Delta\lambda = c/2L_{device} \approx 40MHz$ where c is the speed of light and $L_{device} \approx 3.5m$ is the length of the MKI in it's vacuum tank), but the added accuracy in this measurement is considered appropriate in this case.

The measurements were carried out on a fully assembled MKI inside it's vacuum tank, with a beam screen housing 15 tapered screen conductors. For the single wire measurements a copper wire of radius 0.5mm was placed in the central beam pipe, suspended on a vacuum flange modified to take a Sucobox connection allowing a capacitor housed in a seperate sucobox to be attached to the connecting box. To displace the wire for displaced single wire measurements, a pair of nylon screws (one at each flange) were used to physically displace the wire. Displacements were taken at 3mm intervals in both the vertical and horizontal planes, between -9mm and +9mm displacement.

For the two wire measurements, two wires were suspended in the device, seperated by 7mm. The wires were connected to a single VNA, each connection run through a 180° hybrid to generate the appropriate phase difference between the two. The experimental setup for the two wire measurements is shown in Fig. 8.2.

The VNA is calibrated using an 8532E calibration kit, using an IF bandwidth of 1kHz. 2000 equally space data points are used over a frequency range of 1MHz-2GHz. The Q factors and resonant frequencies of the resonant modes are calculated using a peak finding algorithm on the VNA, and the conductive losses due to the copper wire calculated analytically and compensated for.

The simulations of the MKI are carried out using CST Particle Studio, a time domain simulation code. A simplified model of the magnet is created, shown in Fig. 8.2. An integrated wakelength of 15m is used in the simulations, and a simulated bunch of a gaussian profile with $\sigma_z = 45mm$ used. A half model is used for displacements of the source/integration path in the vertical axis due to the symmetry plane in the y-z plane, giving a mesh count of ≈ 16 million for vertically displaced simulations and ≈ 16 million for horizontally displaced simulations. To acquire the dipolar and constant impedance terms, the source signal is displaced whilst the path of integration is kept on axis. The linear variation in the resulting impedance can be seen to be the dipolar term and the



Figure 8.6: The measurement setup for the two wire measurement setup. The 180° hybrid can be seen on top of the vacuum flange.

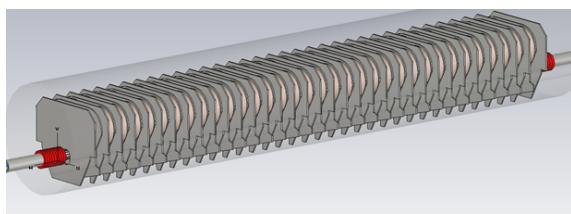


Figure 8.7: The simulation model of the LHC injection kickers implemented in CST Particle Studio.

constant impedance the constant term. Similarly for the quadrupolar term the source signal is kept on axis and the

The results for the measurements be seen in the following figures:

1. Fig. 8.2 the longitudinal impedance
2. Fig. 8.9(a) the horizontal dipolar impedance
3. Fig. 8.9(b) the vertical dipolar impedance
4. Fig. 8.2 the quadrupolar impedance
5. Fig. 8.2 the constant transverse impedance

It can be seen that there is generally good agreement between the measurements and simulations in all planes. In particular the agreement for the real component of the longitudinal impedance between measurements and simulations is exceptionally good below 1.5GHz. This is considered an important verification of the simulation model as this is the

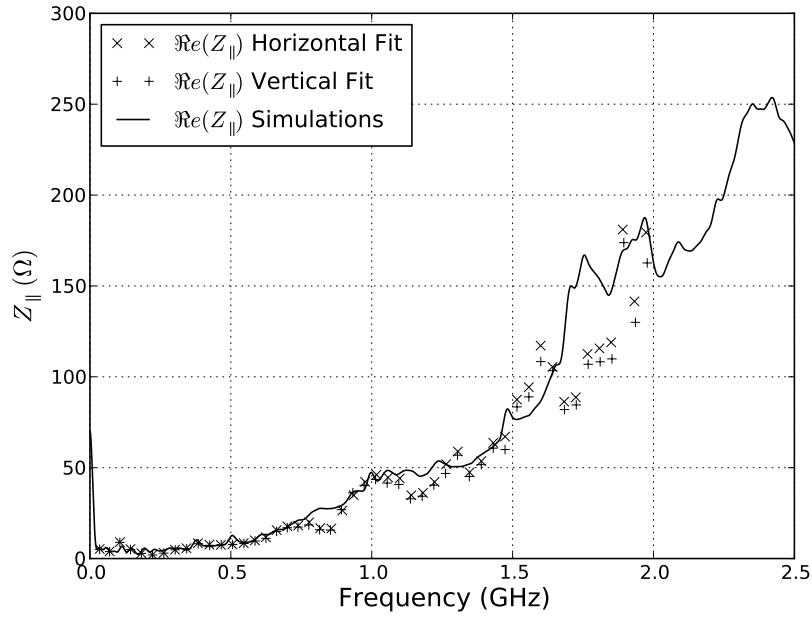


Figure 8.8: The longitudinal impedance of the LHC MKI acquired by measurements using the resonant coaxial wire method and time domain simulations using CST Particle Studio.

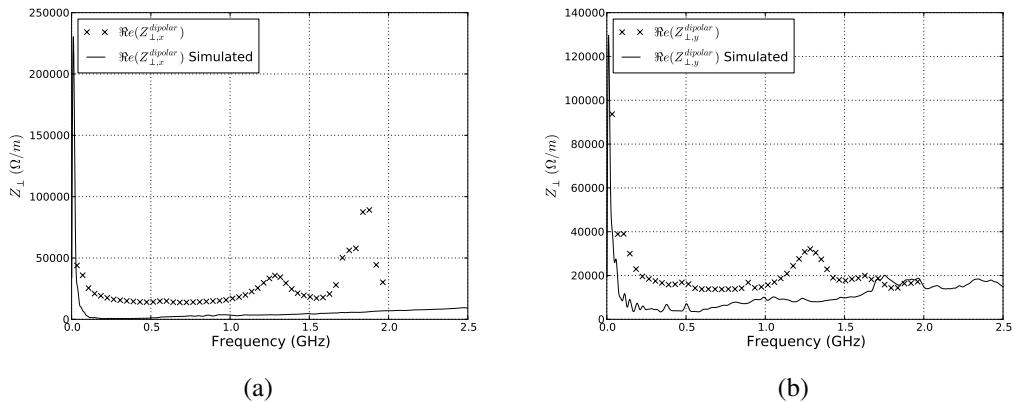


Figure 8.9: The dipolar impedances of the LHC MKI acquired by measurements using the resonant coaxial wire method and time domain simulations using CST Particle Studio. 8.9(a) shows the horizontal dipolar impedance, and 8.9(b) the vertical dipolar impedance

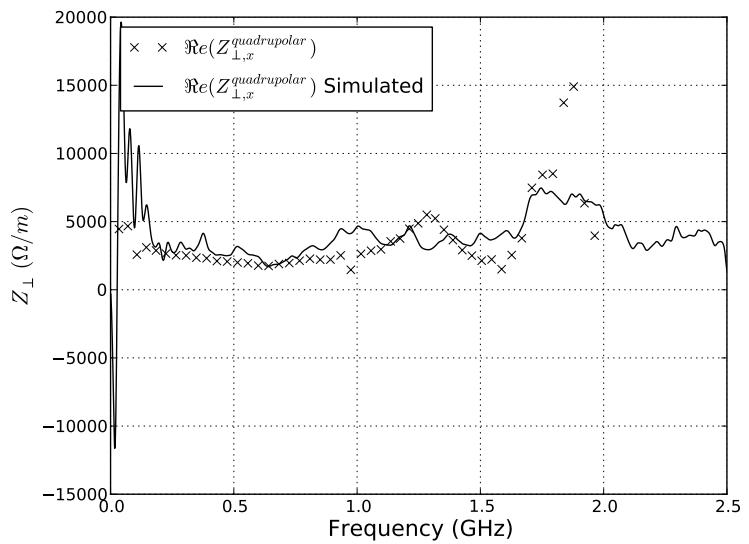


Figure 8.10: The quadrupolar impedances of the LHC MKI acquired by measurements using the resonant coaxial wire method and time domain simulations using CST Particle Studio.

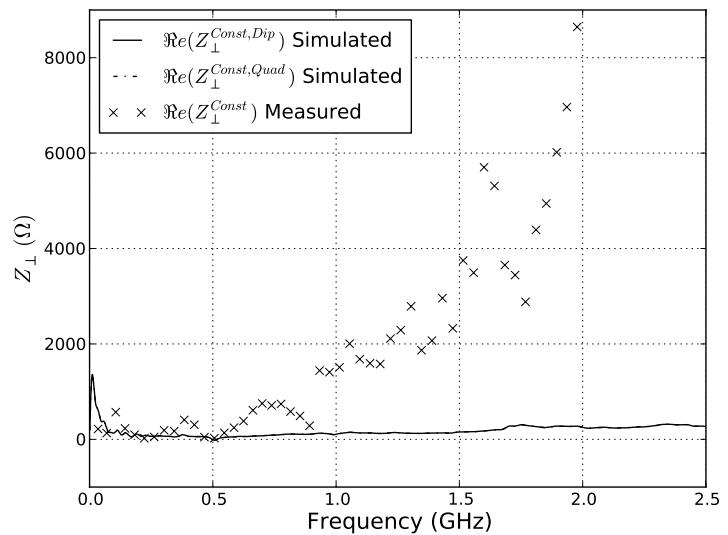


Figure 8.11: The constant transverse impedances of the LHC MKI acquired by measurements using the resonant coaxial wire method and time domain simulations using CST Particle Studio.

impedance of greatest concern presently due to beam-induced heating. Discrepancies can be seen in the longitudinal measurements above 1.5GHz - this is likely due to differences between the internal structure of the magnet and that represented by the simulation model.

In the transverse plane the dipolar impedance in both the vertical and horizontal plane shows good agreement between the simulations and the measurements. Likewise the agreement for the quadrupolar impedance is good over much of the frequency range, although the simulation and measurement results begin to diverge above 1.7GHz. The constant transverse term shows a good agreement up until $\approx 1\text{GHz}$ whereupon the results diverge. This is due to the sensitivity of these results to the systematic and random errors in the measurement of the longitudinal impedance. The comparatively small longitudinal impedance measured in this instance leads to large errors in these results.

8.2.1 Beam Induced Heating Estimates for 15 Screen Conductors

It can clearly be seen from the measurements of the real longitudinal impedance (8.2) that there is a significant broadband impedance to the structure which could a cause of beam induced heating. This strongly indicates that the removal of the 9 screen conductors closest to the HV busbar has drastically decreased the screening of the ferrite from the beam image current.

To provide a first estimate of the expected heating of the MKI it is necessary to estimate the power loss in the MKI. Taking the simulation impedance (due to allowing a finer resolution of frequency) the power is estimated using the broadband method of heat calculation given in Sec. ???. For these calculations we consider the operational parameters for the 2012 proton run in the LHC, summarised in Tab. 8.2.1. Estimates for longitudinal profiles of gaussian, parabolic and \cos^2 profiles assuming bunch lengths between 1.0 and 1.4ns are shown in Tab. 8.2.1. The thermal evolution of the MKI with this power load (assuming all the power is lost on the ferrite yoke for a worst case scenario) has been evaluated extensively by Garlasche et al [93], and has been found to be compatible with the measured temperature of the MKI thermal probes [92]. As a response to this the interlock temperature was increased a number of times during 2011 and 2012 to take account of the

Table 8.2: The 2012 LHC operational parameters used for estimating the power loss in the MKI with 15 screen conductors.

| | | |
|---------------------|----------------------|----|
| Bunch Spacing | 50 | ns |
| Number of bunches | 1380 | |
| Particles per bunch | 1.7×10^{11} | |

Table 8.3: Power loss estimates for the LHC-MKI with 15 screen conductors in the beam screen.

| Bunch Length (ns) | $P_{loss,gaussian}$ | $P_{loss,parabolic}$ | P_{loss,\cos^2} |
|-------------------|---------------------|----------------------|-------------------|
| 1.0 | 134 | 137 | 210 |
| 1.1 | 113 | 115 | 171 |
| 1.2 | 98 | 99 | 143 |
| 1.3 | 86 | 88 | 123 |
| 1.4 | 79 | 80 | 108 |

expected internal temperature of the ferrite in relation to the measured temperature at the location of the temperature probes. In particular the measurement of the magnetic field parameters of the fired kicker (rise time, ripple and field strength) during the so called soft-start regime (firing the kicker with no beam) have provided accurate relations between the measured temperature and the ferrite yoke temperature [92].

It has thus been shown that the power loss due to the beam induced wakefields into the MKI can describe the temperature behaviour seen during 2011 and 2012 operation, giving us confidence in our understanding of the sources of and heating processes occurring within the MKI. To propose workable improvements to the beam screen, it is first necessary to understand both the sources of the impedance due to the beam screen layout and the limitations that both manufacturability and the electrical potential build up on the screen conductors produces. In addition other methods of increasing decreasing both the power load and of improving the rate of cooling of the kicker are complementary avenues of study to reduce the problem of beam-induced heating in the MKIs, the problem ultimately being the high temperature of the ferrite yoke.

8.3 Other Concerns for the MKI Operation and Temperature Reduction

Given the breadth of concerns that must also be considered alongside beam impedance when discussing the heating of the MKIs and alterations to the beam screen design it is suitable to include a brief discussion on these matters here.

First of the concerns is the induced electrical potential in the screen conductors during the firing of the kicker magnet. It is due to this high induced voltage (up to 45kV on the conductor closest to the HV busbar) and the resulting sparking/electrical breakdown between screen conductors and to the end of the beam screen at the capacitively coupled end that were the initial motivation to remove the 9 screen conductors from the beam screen. The reasoning for this was that sparking produces vacuum spikes, can cause the decay of the screen condition and may be a source of UFOs (unidentified falling objects - microscopic dust particles that drop through the beam causing spikes in beam losses due to scattering, resulting in the beam being dumped).

In addition to improving the screening of the ferrite yoke from the beam any proposed beam screen design must also allow the PFN to be fired at the desired voltage (54kV from the technical specifications). Work by Barnes et al [94] has found there are a number of factors that can reduce the induced potential on the screen conductors. These include the use of elongated spheres on the ends of the screen conductors to reduce the high electric fields at the ends of the screen conductors (Fig. ??), alternating the length of the screen conductors (Fig. ??) and replacing the metallization with a cylindrical metal tube away from the surface near the areas of overlap between the screen conductors and external metallization (Fig. ??). The aim of this last measure is to remove the external ground further away from the outside of the ceramic beam screen, as the metallization has been observed to force the ground plane closer to the screen conductors due to the high permitivitty of the ceramic beam screen. The effects of these changes on the beam coupling impedance are discussed in later sections.

The second major concern is the transfer of thermal energy out of the kicker magnets.

Due to the HV pulsed nature of the kicker magnet operation there is no active cooling within the device, thus cooling is reliant exclusively on radiative transfer of the heat from the components to the surrounding air via the vacuum tank. Experiments have shown that the internal surface of the vacuum tank has a very low emissivity in the IR range [95], and subsequent thermal simulations have shown that the stable temperature of the MKI is very sensitive to the emissivity of the vacuum tank internal surface [96]. Subsequently a significant quantity of work has been carried out on methods to improve the emissivity of the internal surface of the vacuum tank so as to more effectively passively cool the device.

8.4 Simulations and Measurements of the MKI with 19 Screen Conductors

As can be seen from Fig. 8.4(b), MKI8d had experienced significantly higher temperatures than the other kicker magnets during operation. Although estimated to experience the same degree of power loss within the structure as the other kicker magnets (due to the similarity of the beam screen layout) the large variation in the emissivity of the internal surface of the vacuum tank can have contributed to the higher temperatures observed. As a result of this, and the necessity to find a solution to the high temperatures of the MKIs, which were acting as a severe limiter on the integrated luminosity delivered by the LHC, it was decided to implement an improved beam screen in a replacement magnet in an effort to reduce the power loss in this magnet, and at the same time test some of the principles of future alternative beam screen designs.

The following design features were implemented in the replacement MKI8d (explanations are given with the description, see Fig. 8.4):

1. 19 screen conductors are placed within the beam screen in order to improve the shielding of the ferrite from the beam. These are clustered together, with the 5 empty screen conductor slots closest to the HV busbar to minimise the induced

voltage on the screen conductors. Both impedance and electrical simulations have indicated that this will drastically reduce the beam coupling impedance of the MKI, and that the PFN may fire at the operational voltage without inducing electrical breakdowns in the beam screen.

2. Elongated metal spheres are placed on the capacitively coupled end of the kicker magnet. These are intended to reduce the field amplification due to any sharp edges at the ends of the screen conductors, thus reducing the possibility of electrical breakdown. This method has some drawbacks due to the need to expand the slots housing the screen conductors to accept the larger elongated spheres.
3. The screen conductors are arranged to alternate in length (i.e. there are two lengths of screen conductor in the beam screen) to further reduce the induced potential on the screen conductors. The effect here is for the longer length screen conductors to effectively shield the shorter screen conductors, thus reducing the potential difference between neighbouring screen conductors.

Due to the primary motivation for altering the beam screen being the increasing beam-induced heating seen in the kicker magnets the impedance studies were primarily motivated by reducing the real component of the longitudinal beam coupling impedance. Simulations carried out prior to the construction of the magnet predicted that the beam-coupling impedance would be strongly reduced by the inclusion of 4 additional screen conductors. Measurements taken of the magnet confirmed these simulations to very good accuracy, and shown in Fig. 8.4 along with the measurements and simulations for an MKI with 15 screen conductors. It can be seen that the real component of the beam coupling impedance is reduced drastically across the entire frequency range of concern, and the predicted power loss as a result of the simulated impedance (shown in Tab. 8.4) shows that the expected power loss is reduced by a factor of 2-3. Calculations of the thermal evolution of the proposed MKI8d replacement also indicated that the maximum temperature reached would decrease significantly due to this reduced power load [96].

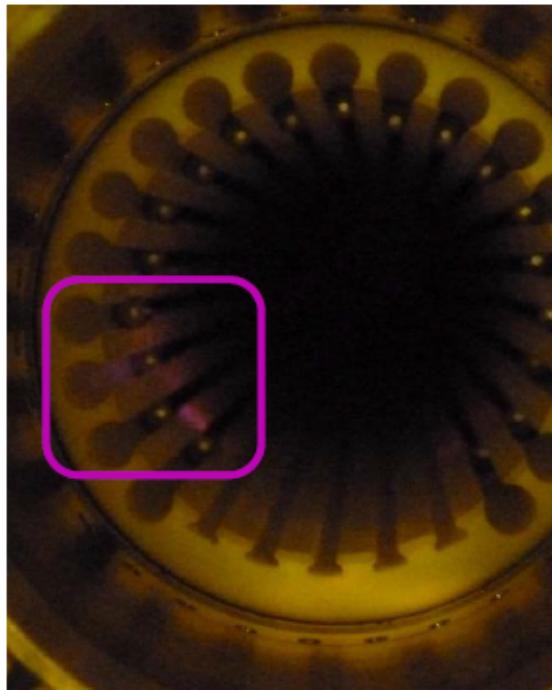


Figure 8.12: The additional screen conductors and the elongated spheres place in MKI8d to reduce both beam coupling impedance and the electric potential build up.

Table 8.4: The power loss due to the impedance calculated for the MKI with 15 (most common configuration) and 19 (as for MKI8d) screen conductors. Estimates are given assuming a beam with 1380 bunches, separated by 50ns, with each bunch containing 1.7×10^{11} particles. Estimates of the power loss assuming a gaussian, a parabolic and a \cos^2 longitudinal bunch profile are calculated, and a range given for the lowest (typically the gaussian distribution) and highest (typically the \cos^2 distribution due to the large high frequency lobes) values calculated.

| Bunch Length (ns) | P_{loss} 15 Screen Conductors | P_{loss} 19 Screen Conductors |
|-------------------|---------------------------------|---------------------------------|
| 1.0 | 134-210 | 50-66 |
| 1.1 | 113-171 | 44-58 |
| 1.2 | 98-143 | 41-52 |
| 1.3 | 86-123 | 40-47 |
| 1.4 | 79-108 | 36-43 |

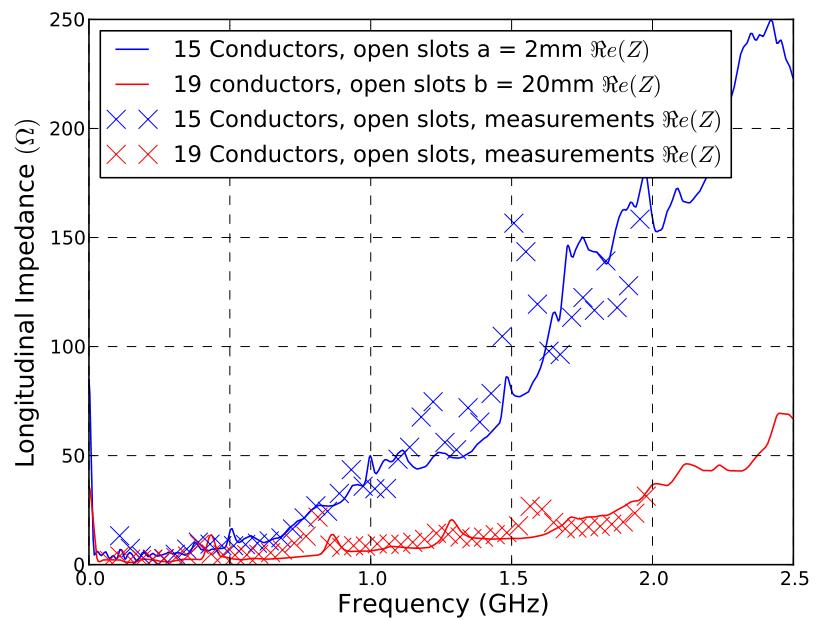


Figure 8.13: The real component of the longitudinal beam coupling impedance of the replacement MKI8d with 19 screen conductors from both simulations and measurements. The corresponding impedance for an MKI with 15 screen conductors is shown for comparison.

MKI8 Temperatures: 01/07/12-23/10/12

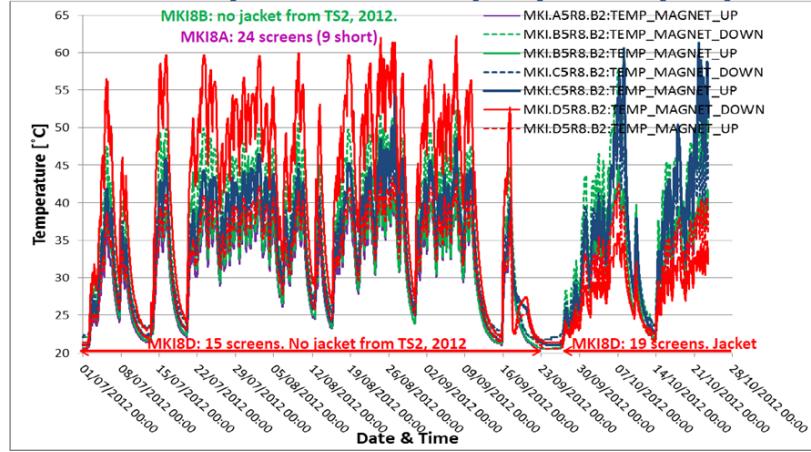


Figure 8.14: The temperature profile of the IP8 injection kicker magnets during the time period before and after technical stop 3 (TS3), when the MKI8d was changed from a kicker magnet with 15 screen conductors to one with 19 screen conductors. It can be seen this magnet (solid red trace) goes from being the hottest magnet to the coolest after TS3.

8.4.1 Temperature of MKI8d after Technical Stop 3

Due to the promising results of the impedance, electrical and thermal simulations of the proposed MKI8d replacement with 19 screen conductors it was decided to construct the replacement magnet and install it during technical stop 3 (TS3) [97]. It is said the proof is in the pudding, and in this case mine is exceptionally tasty; Fig. 8.4.1 shows the temperatures for the kicker magnets at IP8 both before and after TS3. It can clearly be seen that MKI8d (solid red trace) changes from being the warmest magnet in IP8 - An excellent confirmation of the understanding of the sources of power loss within the kicker magnet and the thermal evolution due to the power loss. From these very promising results a great deal of confidence in the simulation tools for predicting the beam coupling impedance and the understanding of the causes of the beam coupling impedance were acquired. As such more significant changes to the MKI design maybe investigated using simulation tools with confidence given the good predictive agreement acquired so far.

8.5 The Dependence of the Beam Coupling Impedance on The Kicker Components

As part of the study to improve the beam screen it was decided to investigate systematically the effect of the various components of the kicker magnet on the resulting beam coupling impedance. This is divided into two sections, the study of the effect of the beam screen on the beam coupling impedance of the ferrite yoke, and subsequently a study of the effects of the dimensions of the beam screen and screen conductors on the beam coupling impedance.

8.5.1 The Impedance of the MKI - Effects of the Inclusion of the Beam Screen

To first judge the effectiveness of the concept of the beam screen as an impedance reduction technique we simulate the MKI by systematically adding components to the magnet to determine their effect on the beam coupling impedance. We consider the following configurations of the MKI:

1. The c-core ferrite yoke
2. The c-core ferrite yoke with a ceramic cylinder inserted inside
3. As above but with 24 screen conductors inserted into the cylinder, capacitively coupled at one end
4. The internal magnet structure including the vacuum tank, HV and ground plates and the surrounding connections.

These geometries are shown in Fig. 8.5.1, and the resulting impedance simulations for the real component shown in Fig. 8.5.1. Several points can be seen; firstly that the inclusion of the beam screen with screen conductors very effectively screens the beam from the other components of the kicker magnet - including the ceramic of the beam screen,

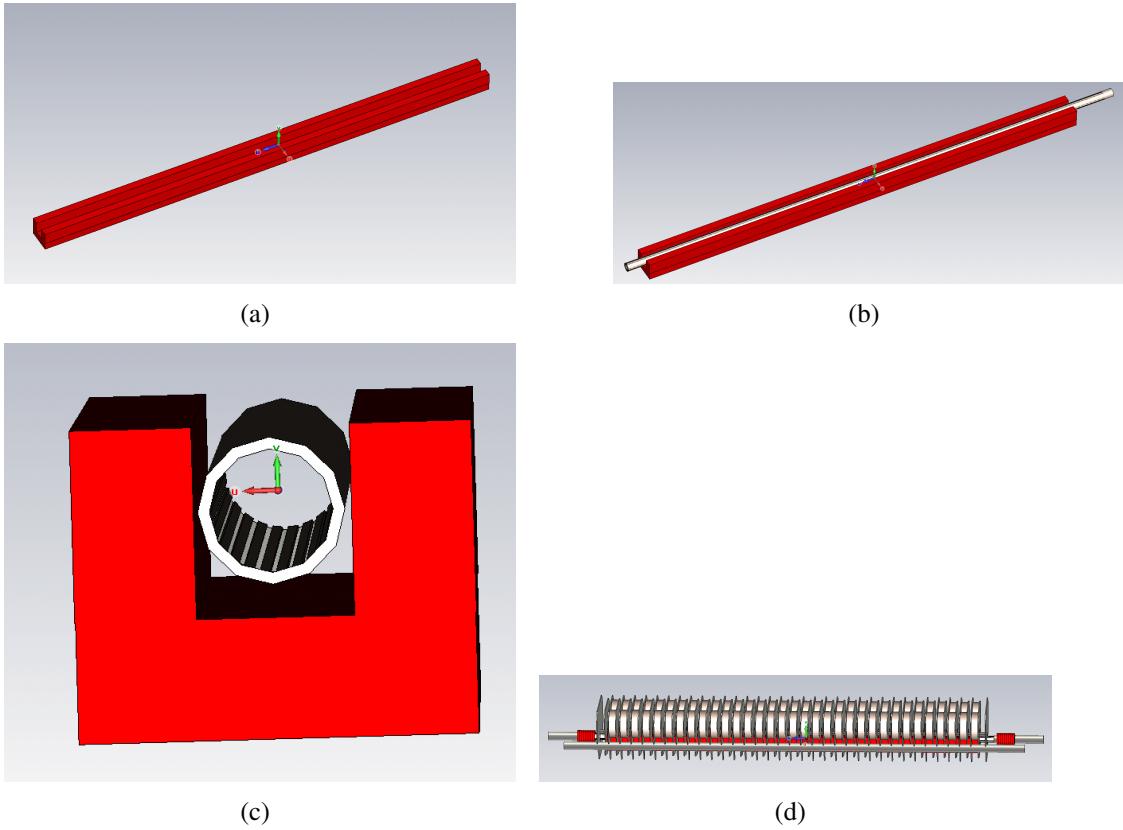


Figure 8.15: The geometries simulated for the various components in the LHC-MKI. These are ferrite only 8.15(a), ferrite and the ceramic beam screen 8.15(b), ferrite with the beam screen containing 24 screen conductors 8.15(c) and finally the complete MKI magnet 8.15(d).

the surrounding structures and the ferrite itself. This indicates that for a beam screen in which the ceramic tube holds a large number of screen conductors, the beam is effectively screened from the surrounding structure up to a frequency characterised by separation of the screen conductors. This has benefits for the impedance simulations as it is valid to use a reduced simulation model considering just the capacitively coupled end provided we can assume the ferrite is well screened (i.e. we have 24 screen conductors in place). Secondly the inclusion of the ceramic beam pipe does not effectively screen the ferrite by itself - the screen conductors are necessary to correctly screen the surroundings. And lastly that the use of the ceramic beam screen contributes significantly to the imaginary component of the longitudinal impedance (evidenced by the linear increase of the imaginary impedance with frequency due to the inductive component of the impedance) even with the presence of screen conductors.

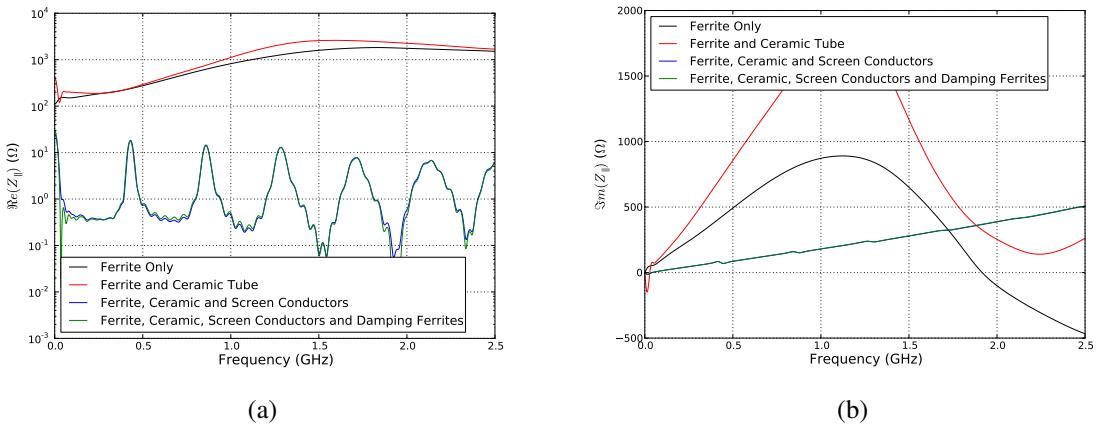


Figure 8.16: The 8.16(a) real component and the 8.16(b) imaginary components of the LHC MKI kicker magnet impedances for different quantities of components in the magnet.

Concerning the role of the beam screen layout there are two areas to examine - the effect of different quantities of screening of the beam by having more or less screen conductors (in this case removing those directed towards the HV busbar as is likely due to concerns of electrical breakdown) and of the effect of different dimensions of the screen at the capacitively coupled end of the beam screen.

8.5.2 How Screening Changes with the Number of Screen Conductors

For the changes on the number of screen conductors two variations are carried out - The first is to examine the case of removing several screen conductors in the beam screen towards the HV busbar (shown in Fig. 8.5.2). This direction is chosen as these screen conductors experience the highest induced voltage during the firing of the kicker magnet, and additionally it was initially thought that on this side the HV busbar would provide some screening of the beam from the ferrite yoke. The second variation is to remove a selection of screen conductors towards the HV busbar (shown in Fig. ??), in this case to examine whether it is possible to acquire some shielding through using some screen conductors and benefitting from removing some screen conductors to remove the rate of

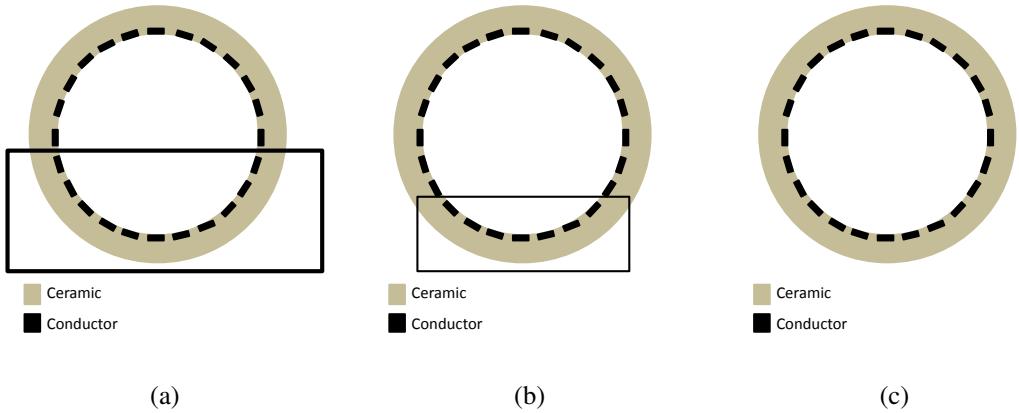


Figure 8.17: Beam screens with different numbers of screen conductors removed from the design quantity of 24. Models of 15 8.17(a), 19 8.17(b) and 24 8.17(c) screen conductors are considered for the impedance simulations. Conductors surrounded by the boxes are removed in this case.

electrical breakdown.

The longitudinal impedance for these configurations is shown in Fig. 8.5.2. It can be seen that for both components of the impedance that more screen conductors reduces the magnitude of the impedance at all frequencies - this can simply be understood as improving the screening of the beam from the ferrite with additional screen conductors. This can particularly be seen in the increase in the number of screen conductors from 15 to 19 to 24 conductors in total - The screening is improved dramatically in each subsequent case.

In addition it can be seen that it is preferable to distribute the screen conductors such that the maximum arc of the beam screen without screen conductors is minimised. This can clearly be seen by comparing the case of 19 screen conductors where all conductors are clustered together (as was done for the replacement MKI8d) and for 19 screen conductors, where 4 are equally distributed towards the HV busbar. Again this advantage is borne out in the power lost in the structure. This is however not beneficial without consideration of the induced electric field during kicker firing, as the induced voltage on a given screen conductor is still the same, and thus tracking along the beam screen to the external metallization is not changed by this layout. It can thus be seen that the beam screen design itself must be optimised with regards to the induced screen conductor

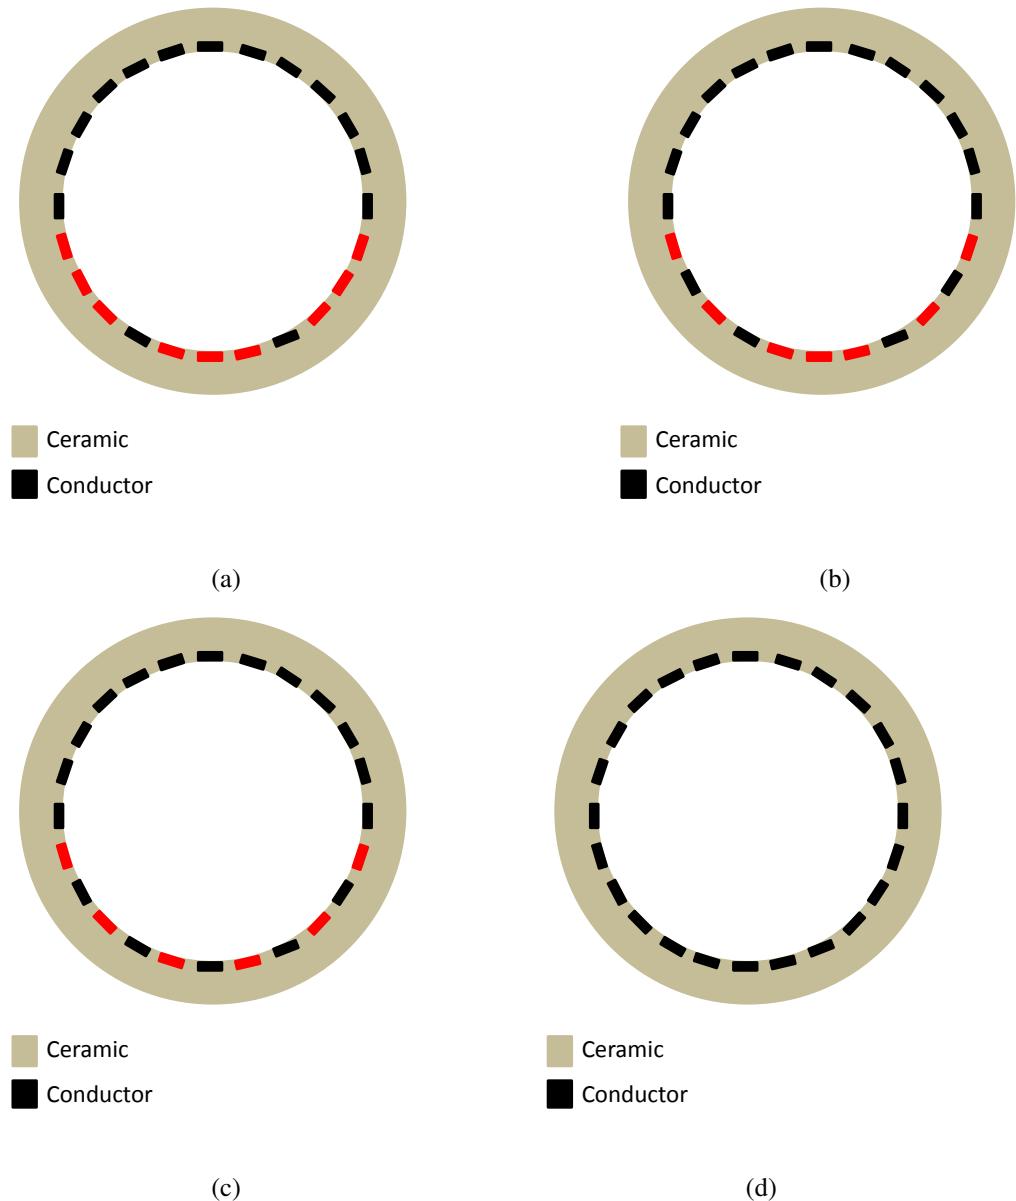


Figure 8.18: Beam screens with different numbers of screen conductors removed from the design quantity of 24. Models of 17 8.18(a), 19 8.18(b), 20 8.18(c) and 24 8.18(d) screen conductors are considered for the impedance simulations. Conductors that are coloured red are the removed in each case.

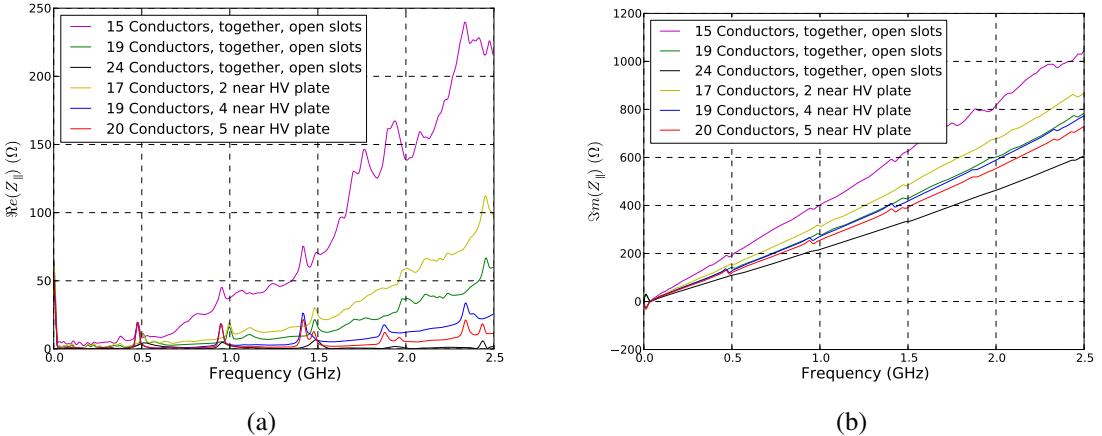


Figure 8.19: The longitudinal impedance of the MKIs with different numbers of screen conductors included in the beam screen. Shown is the real component 8.19(a) and the imaginary component 8.19(b) of the longitudinal impedance.

voltage before more can be added to the ceramic tube to improve screening.

8.5.3 Dependence of the Impedance on the Beam Screen Dimensions

It can be seen that with 24 screen conductors placed in the beam screen that the resulting impedance is dominated by the configuration of the beam screen. To investigate how changes to certain parameters (specifically the length of the overlap between the screen conductors and the external metallization and the thickness of the ceramic beam screen) a cut down model of the kicker magnet is used, considering just the capacitively coupled end of the kicker magnet (shown in Fig. 8.20(a)). This is done to allow a larger mesh density in this important (from the electrical and impedance point of view) region of the kicker magnet. In models of the full kicker magnet the mesh density is severely limited due to the large mesh generated in the entire magnet volume which subsequently may make the mesh very limited in near beam areas (for example in the ceramic tube between the screen conductors and the external metallization. A comparison is shown in Fig. 8.5.3). An illustrated diagram of the capacitively coupled end is given in Fig. 8.20(b) to clarify the components referred to in this section.

First we shall consider the effect the impedance of the change in the length of overlap of the capacitively coupled sections. To do this we consider the shortened end section,

(a)(b)

Figure 8.20: 8.20(a) The cut down simulation model used for simulations of the MKI beam screen with 24 screen conductors and 8.20(b) an illustrated diagram of the capacitively coupled end of the beam screen.

(a)(b)

Figure 8.21: A comparison of the mesh that may be generated in CST Particle Studio using both the full model 8.21(a) and the cutdown model 8.21(b). Blue squares represent a meshing failure which inserts perfect electrical conductor into the model. The simulation time for the first is on the order a day, for the second 30 minutes.

and change the length of the external metallization to change the length of the overlap (the length of the screen conductors used is kept fixed to avoid changing any potential resonances due to the screen conductors acting as $\lambda/4$ resonators). Overlaps of between 0.08m and 0.12m at 0.01m intervals are simulated, and the results shown in Fig. 8.22(a). It can be seen that each overlap has a distinct set of resonance frequencies. These source of these resonances can be seen to be the result of the gap between the external metallization and the screen conductor acting as a $n\lambda/2$ resonator. End effects caused the effective length of the overlap to be extended to some degree, which fitting to the resonance frequencies has shown to be ≈ 9 mm for all lengths. This gives a resonant frequency f_{res} of

$$f_{res} = \frac{nc}{\sqrt{\epsilon_r} 2L_{overlap}} \quad (8.1)$$

where n is an integer, c is the speed of light ϵ_r is the relative permittivity of the volume material (= 10 for the alumina beam screen) and $L_{overlap}$ is the length of overlap. This can be seen for the first resonances for all the lengths of overlap in Fig. 8.22(b), and up to 2.5GHz for the case of the overlap being 100mm in Fig. 8.5.3. It can be seen that the predicted frequencies match the simulated very well. Work is still under way as to how to determine the peak impedance of each resonance.

Secondly the influence of the thickness of the beam screen is considered. This is a

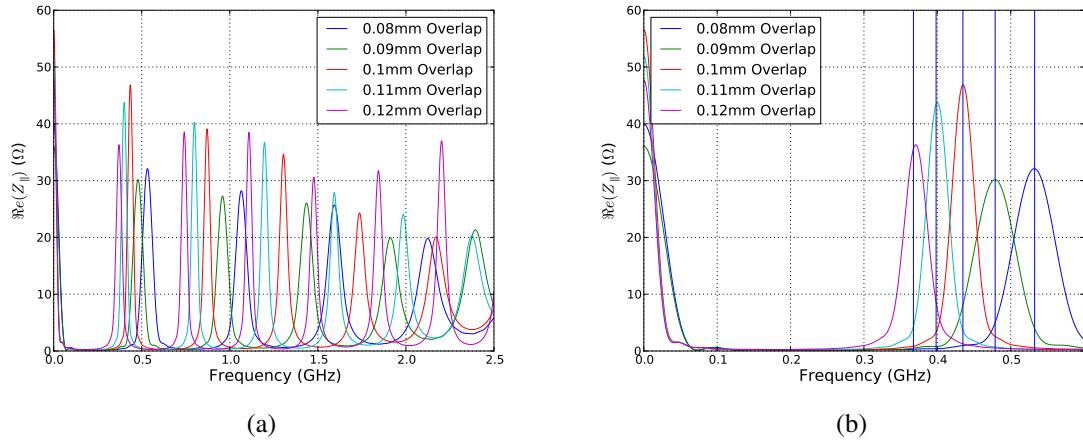


Figure 8.22: 8.22(a) The real component of the longitudinal beam coupling impedance for different lengths of the overlap, and ?? a zoomed in plot of the first resonances of all the overlaps with the calculated resonance frequency for each

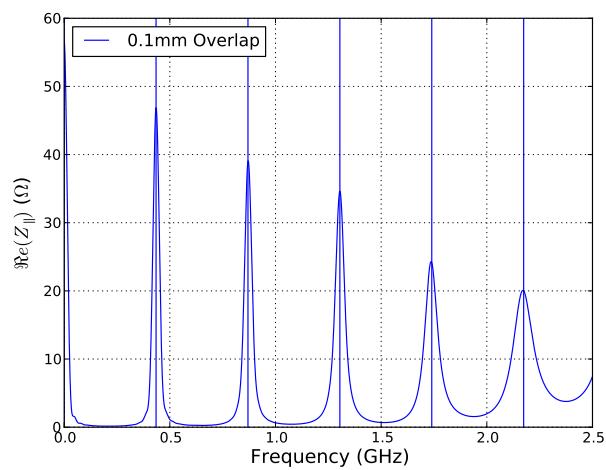


Figure 8.23: The impedance of the beam screen with 24 screen conductors with an overlap $L_{overlap} = 100mm$ and the predicted resonance frequencies from Eqn. ?? shown as blue lines.

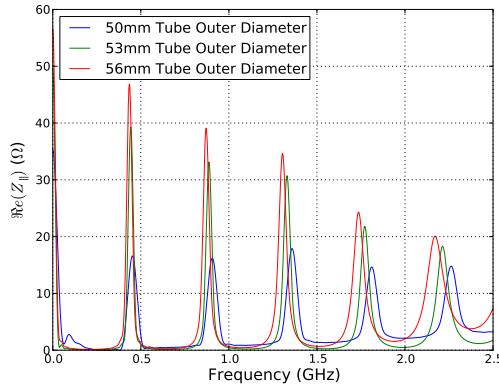


Figure 8.24: The variance of the real beam coupling impedance with the tube thickness. External diameters of 50, 53 and 56mm correspond to tube thicknesses of 8, 11 and 14mm respectively.

concern as increasing this thickness has two effects - to change the value of the capacitance at the capacitively coupled end which effects the low frequency impedance, and the increase in the volume of the overlap region due to the increased thickness. The internal diameter of the ceramic tube is kept at 42mm, whilst external diameters of 50, 53 and 56mm are considered, giving tube thicknesses between 8 and 14mm. The resulting real component of the longitudinal impedances is shown in Fig. 8.5.3, where it can be seen that the increasing the pipe thickness has two effects - a slight lowering of the resonant frequency, but also a significant increase of the peak impedance of the resonance, by almost a factor 2 from a tube 8mm thick to one 14mm thick. The difference that this makes to the expected heating of the MKI can be seen in Tab. 8.5.3, where it can be seen that the change in the power loss due to the increased thickness could be expected to be small assuming a broadband heating scenario, but increases significantly if we assume a beam harmonic falls upon the resonant frequency.

8.6 New Beam Screen Designs

Using the knowledge acquired from examining the beam coupling impedance dependence on the layout of the beam screen from the previous section, and additionally the electrical

Table 8.5: The beam induced heating calculated for a number of beam screen designs with 24 screen conductors of equal length (overlap of 100mm) with different tube thicknesses assuming 50ns bunch spacing LHC conditions (1380 bunches, 1.7×10^{11} ppb with a bunch length of 1ns). It can be seen that the broadband heating component is relatively small for the limited change in the tube thickness, whilst the resonant component can increase drastically due to the increasing peak impedance.

| Outer Tube Diameter/Tube Thickness (mm) | $P_{loss,BB}$ | $P_{loss,Res}$ |
|---|---------------|----------------|
| 50/8 | 30 | 4 |
| 53/11 | 26 | 10 |
| 56/14 | 35 | 12 |

field simulations of the induced voltages on the screen conductors during magnet firing and number of alternative beam screen designs have been proposed. The driving points in these designs has been to reduce the power loss into the MKI (in this case to reduce the temperatures reached by the ferrite yoke) and to reduce the induced voltage in the screen conductors during magnet firing to eliminate electrical breakdown/discharge between the screen conductors and along the end the surface of the beam screen to a ground plane.

The proposed designs are described below:

- 24 screen conductors of alternating length, as shown in Fig. 8.6. The alternating length screen conductors layout has been demonstrated to reduce the induced voltage on the shorter length screen conductors, thus being beneficial to the electrical breakdown rate.
- 24 screen conductors tapered in length, as shown in Fig. 8.6. The tapering of the screen conductors has previously been shown to help reduce the induced potential in designs with 15 screen conductors, and should be kept as a proven, if not optimal option for 24 screen conductors.
- 24 screen conductors some with an alternating length and then tapered towards the HV busbar, as shown in Fig. 8.6. This intended to use the reduction of induced voltage due to the tapering, whilst keeping a relatively high capacitance at the capacitively coupled end so as to not induce additional worse resonances here.

- 24 screen conductors in enclosed slots in the ceramic beam screen, as shown in Fig. 8.6. The intention of this design is to increase the necessary induced voltage on the screen conductors before breakdown occurs due to surface tracking no longer being a possible breakdown path.
- An alternative screen conductor layout, in which some are conductively connected to ground on both ends and all other capacitively coupled, as shown in Fig. 8.6. This design is intended to reduce the induced voltage on the screen conductors by having all the screen conductors be connected to one another at the capacitively coupled end thus receiving the same induced voltage. To counter possible eddy currents during firing reducing the field rise time the majority of the screen conductors are capacitively coupled at both ends of the magnet, with two conductors connected to ground at the downstream end of the magnet.
- 24 screen conductors with part of the metallization replaced by a external metal cylinder, as shown in Fig. 8.6. This design is intended to reduce the electric field gradients at the capacitively coupled end by removing the distance between the screen conductors and the ground plane by replacing the metallization on the external surface of the ceramic beam screen with a metal cylinder some millimetres off the surface. Electric field simulations had shown that the high permittivity of the ceramic was in effect pushing the ground plane into the ceramic cylinder, reducing the effective spacing between the screen conductors and the metallization, whereas this physical air gap should reduce this effect.
- 24 screen conductors of a mixture of alternating and tapered lengths with part of the metallization replaced with an external metal cylinder, as shown in Fig. 8.6. This was intended to improve on the above design by using the combined alternating and tapered design to further reduce the induced voltages on the screen conductors. Due to difficulty of manufacturing the step out of the beam screen is continued beyond the ends of the screen conductors. **This is the proposed final design for implementation in the replacement MKIs for installation during long shutdown 1.**

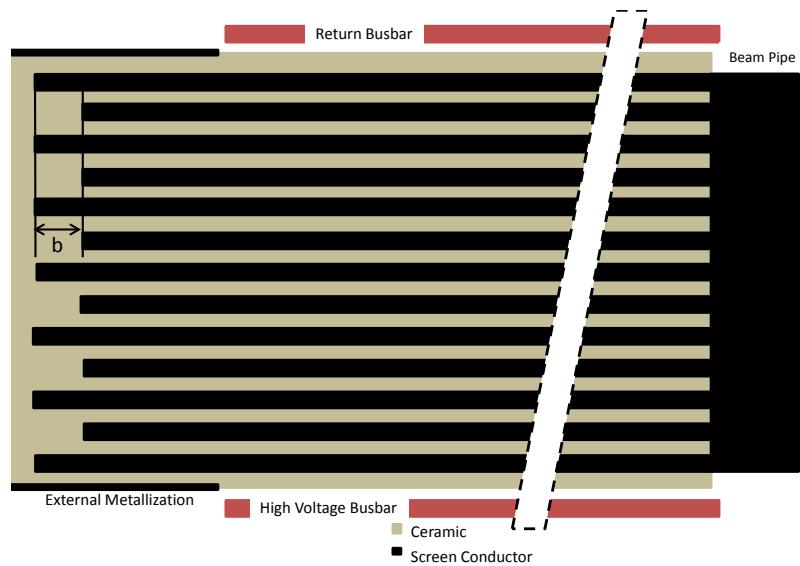


Figure 8.25: A MKI beam screen design with alternating lengths of screen conductors - separated by a length b .

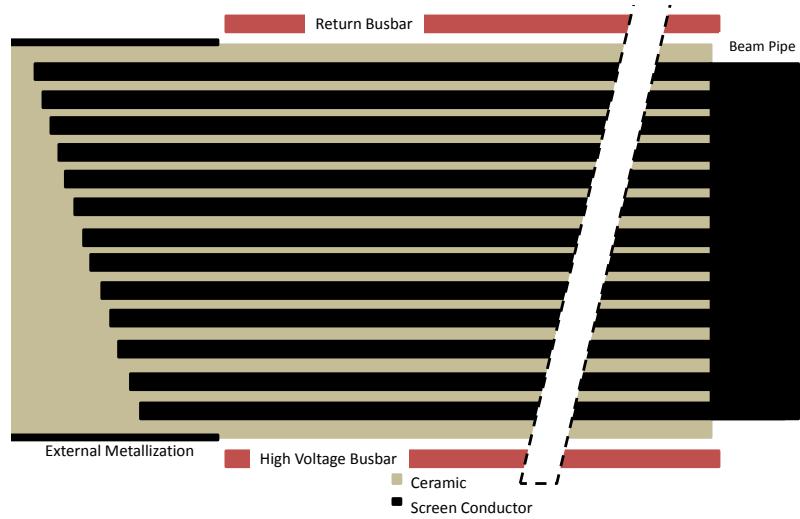


Figure 8.26: A MKI beam screen design with tapered lengths of screen conductors. The taper may be altered to acquire the desired combination of impedance and induced voltage on the screen conductors.

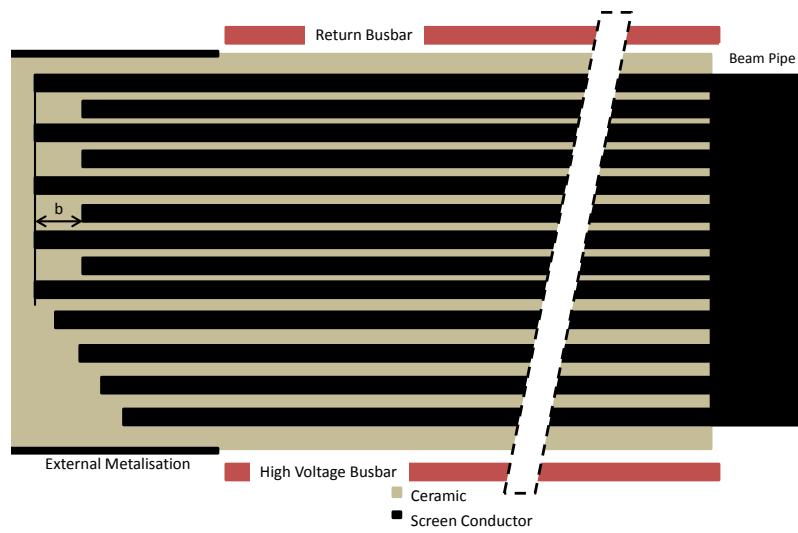


Figure 8.27: A MKI beam screen design with a combination of tapered and alternating screen conductors. The degree of alternating and tapering may change dependent of the desired impedance and induced voltage on the screen conductors.

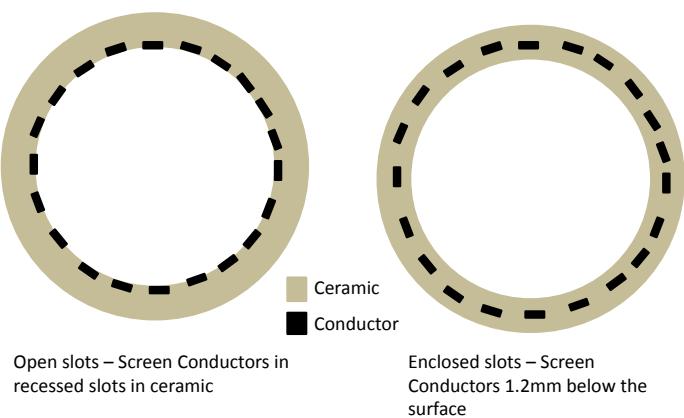


Figure 8.28: A MKI beam screen design with enclosed slots (shown in comparison to the usual beam screen design with open slots) for the screen conductors.

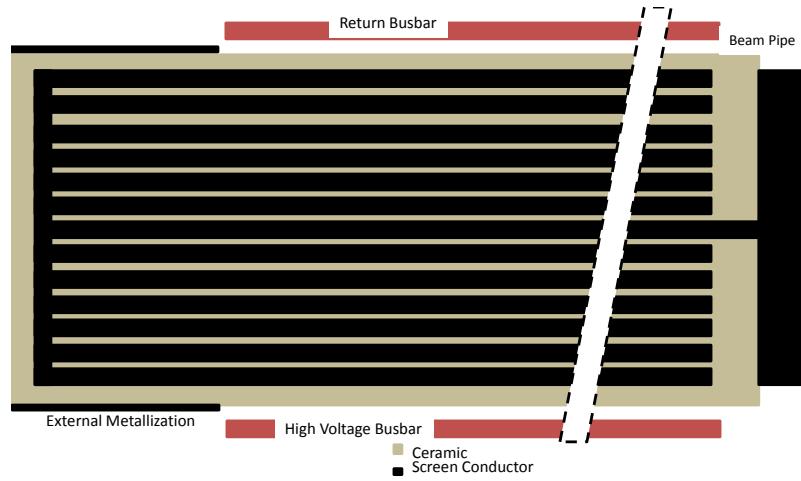


Figure 8.29: A MKI beam screen design using an alternative screen conductor layout in which 2 (cross section shown here) conductors are connected to ground at the downstream end of the screen, and all conductors are welded together are the capacitively coupled end.

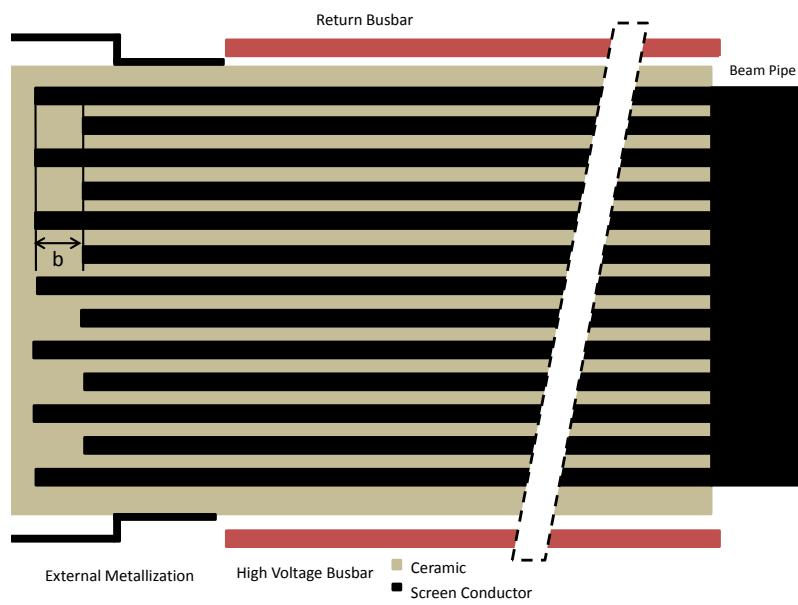


Figure 8.30: A MKI beam screen design implementing a replacement of some of the external metallization with a metallic cylinder so as to pull the ground plane closest to the screen conductors away.

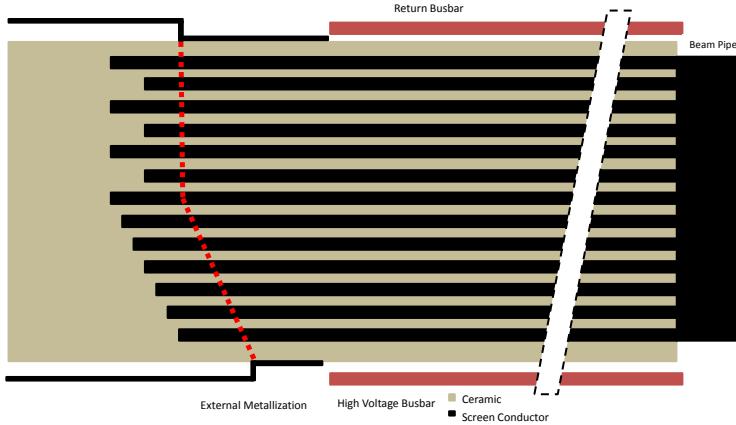



Figure 8.31: The proposed final MKI design. A combination of alternating and tapered screen conductors is used, along with a step out of the external metallization. The outline of the step out is shown by the red-dashed line.

In this analysis we shall focus on the resulting power loss from interaction of the beam with the real component of the longitudinal beam impedance as this is the present primary limitation from the MKIs. The real component of the longitudinal beam coupling impedance is shown in Fig. 8.32(a), and the imaginary in Fig. 8.32(b).


The estimated heating for both 25ns and 50ns bunch spacing operation in the LHC are shown in Tab. 8.6 for 1ns bunch length, and the variation in power loss with the bunch length for 25ns and 50ns bunch spacing shown in Fig. 8.6. It can be seen that the power loss can be very strongly reduced for very short bunch lengths (as has been proposed for HL-LHC operation without crab cavities [?]) by increasing the bunch length, but for nominal bunch lengths ($\tau_b = 1\text{ns}$) it can be seen that there is not much benefit in increasing the bunch length.

8.7 Upgrade Plans for Long Shutdown 1 and Beyond

During long shutdown 1 (LS1) it has been decided to first carry out measurements of the beam impedance and electrical breakdowns observed of the proposed new beam screen design, and subsequently construct 8 new kicker magnets implementing the new screen

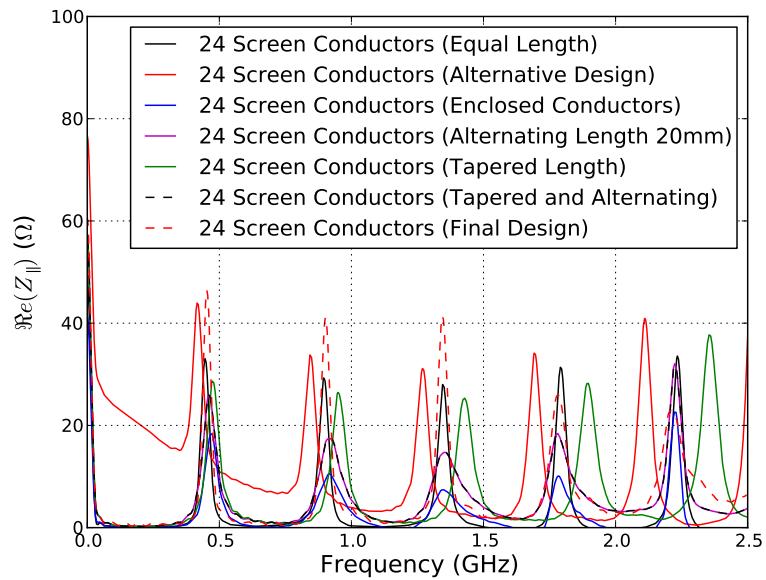

(a)

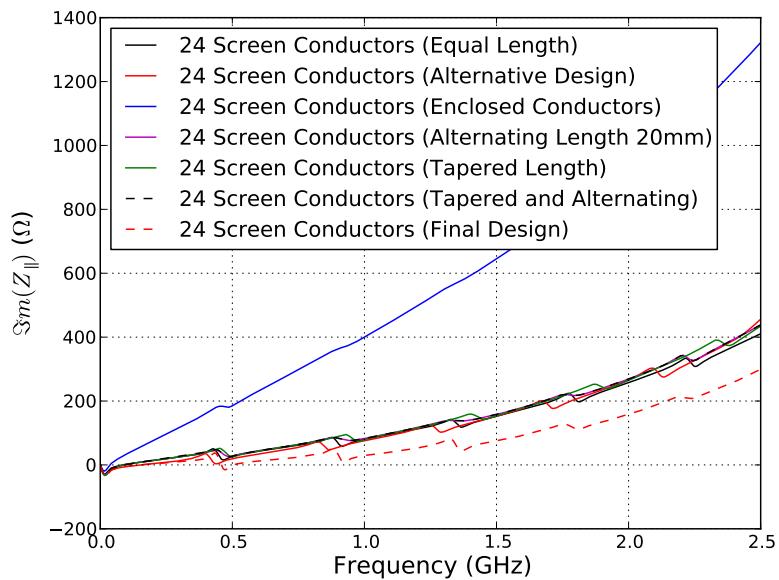

(b)

Figure 8.32: The real component of the beam coupling impedance for a number of the proposed beam screen designs 8.32(a). In addition the imaginary component of the longitudinal impedance is shown for completeness 8.32(b).

Table 8.6: The power loss expected due to beam-wakefield interactions in the MKIs for a number of proposed beam screen designs. Estimates are given for 50ns and 25ns bunch spacing in the LHC (1380 bunches, 1.7×10^{11} particles per bunch for 50ns, 2808 bunches, 1.15×10^{11} particles per bunch for 25ns) assuming a \cos^2 bunch distribution.

| Screen Design | $P_{loss,50ns}$ (W), $t_b = 1\text{ns}$ | $P_{loss,25ns}$ (W), $t_b = 1\text{ns}$ |
|---|---|---|
| 24 Conductors, Alternating Length | 36 | 28 |
| 24 Conductors, Tapered Length | 36 | 27 |
| 24 Conductors, Alternating and Tapered | 36 | 28 |
| 24 Screen Conductors, Enclosed Conductors | 21 | 17 |
| 24 Conductors, Alternate Design | 182 | 161 |
| 24 Conductors, Step out | 37 | 30 |
| 24 Conductors, Final Design | 37 | 30 |

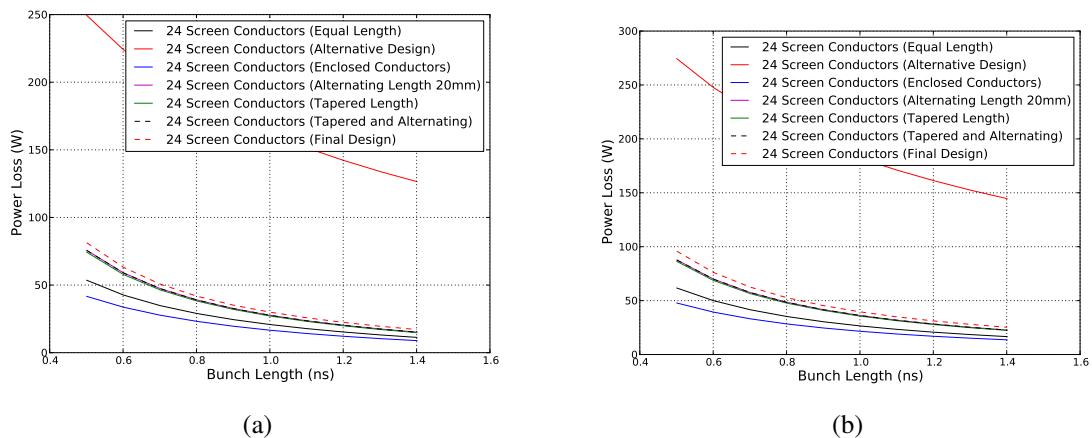


Figure 8.33: The variation of the predicted beam induced power loss with bunch length for a number of screen designs. The variation for 25ns 8.33(a) and 50ns 8.33(b) machine settings.

Figure 8.34: The maximum steady-state temperature reached by the ferrite yoke in the MKI depending on the power load on the ferrite yoke as calculated using a 2D cross section of the MKI. Provided by M. Garlasche et al [cite].

design and the additional proposed changes to the inside of the vacuum tank to reduce the temperatures reached in the ferrite yoke. Thermal simulations have indicated that the proposed screen designs will be capable of reducing the maximum temperature reached in the ferrite yoke below the curie temperature for the nominal operating conditions for the LHC, and for a number of proposed HL-LHC operating conditions also (see Fig. 8.7). In addition electric field simulations have strongly indicated that the induced electric potential on the screen conductors will not be sufficient to induce electrical breakdowns beyond an unsafe operating point.

Further monitoring of the MKIs will be necessary as the stored current in the LHC is increased due to possible further sources of heating within the magnets, however with the work done on the understanding of the beam impedance, the heat transfer within the magnet and the electric field during kicker firing has greatly improved the knowledge of possible limitations in the future and the variety of solutions/counter measures that may be taken.

Chapter 9

Conclusions

In this thesis has been presented a number of studies into the impedance reduction techniques employed in two key systems in LHC, the injection kicker magnets and the collimation systems. Problems with these existing methods have been examined, focusing on their shortcomings from an operational standpoint especially the high temperatures experienced due to beam-induced heating, using both computational and bench-top measurements to identify and characterise the beam-coupling impedance responsible for this. As part of this a new method for measuring the transverse beam impedances of asymmetric structures has been proposed and verified using experimental and computational measurements against both an analytical model and a measured structure. In addition a study of the power loss in ferrite damped cavities with different extents of damping and screening of the ferrite has been presented in order to better understand the heat loads in structures with a complex structure which may limit the effective damping of cavity modes by ferrite.

Subsequently improvements to the existing systems have been proposed, with a certain focus on the expected power load due to beam-induced heating, resulting in a new RF damping system for use in the TCTP collimators, and possibly for further use in the phase 2 secondary collimators and an improved beam screen for use in the LHC injection kicker magnets to be constructed and installed during LS1 in 2013/14.

It has become clear during this work that with the increasing high beamcurrents demanded at high energy hadron colliders in addition to the very long fill times that beam-induced heating must seriously be considered as a potential limitation on the integrated luminosity delivered to the experiments due to both high temperatures that may damage equipment, or due to long cool down times necessary between uses. As such knowledge of the existing impedance reduction techniques must be propogated to the accelerator community, and the suitability and correct implementation of them studied thoroghly during the *design* phase of equipment design can not be emphasised enough.

Bibliography

- [1] F. Ruggiero, “Single-beam collective effects in the lhc,” *Part. Accel.*, vol. 50, no. CERN-SL-95-09-AP. LHC-NOTE-313. CERN-LHC-Note-313, pp. 83–104. 21 p, Feb 1995.
- [2] P. Baudrenghien, M. E. Angoletta, T. Argyropoulos, L. Arnaudon, T. Bohl, O. Brunner, A. Butterworth, E. Ciapala, F. Dubouchet, J. Esteban-Muller, J. Ferreira-Bento, D. Glenat, G. Hagmann, W. Hofle, D. Jacquet, M. Jaussi, S. Kouzue, D. Landre, J. Lollierou, P. Maesen, P. Martinez Yanez, T. Mastoridis, J. Molendijk, C. Nicou, J. Noirjean, G. Papotti, A. Pashnin, G. Pechaud, J. Pradier, J. Sanchez-Quesada, E. Shaposhnikova, M. Schokker, D. Stellfeld, J. Tuckmantel, D. Valuch, U. Wehrle, and F. Weierud, “The lhc rf system - experience with beam operation,” Tech. Rep. CERN-ATS-2011-048, Aug 2011.
- [3] S. Karlheinz, “Space charge,” Introductory CERN Accelerator School, 2006.
- [4] G. Rumolo, “Beam instabilities,” Intermediate CERN Accelerator School, 2011.
- [5] F. Carra, “Choice of material for the tctp ferrite supports.” Geneva: Presented at 1st October 2012 Meeting of the Collimator Working Group, CERN, October 2012.
- [6] M. Barnes, “Injection and extraction magnets,” Magnets, CERN Accelerator School, 2009.
- [7] R. Bailey, J. L. Baldy, A. E. Ball, P. Bonnal, M. Buhler-Broglin, C. Détraz, K. Elsener, A. Ereditato, P. E. Faugeras, A. Ferrari, G. Fortuna, A. L. Grant, A. M. Guglielmi, A. Hilaire, K. Hubner, M. Jonker, K. H. Kissler, L. A. López-Hernandez,

- J. M. Maugain, P. Migliozzi, V. Palladino, F. Pietropaolo, J. P. C. Revol, P. R. Sala, C. Sanelli, G. R. Stevenson, N. Vassilopoulos, H. H. Vincke, E. Weisse, and M. Wilhelmsson, “The cern neutrino beam to gran sasso (ngs).” CERN, Geneva, Tech. Rep. CERN-SL-99-034-DI. INFN-AE-99-05, Jun 1999, addendum to report CERN 98-02, INFN-AE-98-05.
- [8] “n-tof technical design report on experimental area,” CERN, Geneva, Tech. Rep. CERN-INTC-2000-018, Nov 2000.
- [9] G. Gabrielse, R. Kalra, W. S. Kolthammer, R. McConnell, P. Richerme, D. Grzonka, W. Oelert, T. Sefzick, M. Zielinski, D. W. Fitzakerley, M. C. George, E. A. Hessels, C. H. Storry, M. Weel, A. Mullers, and J. Walz, “Trapped antihydrogen in its ground state,” *Phys. Rev. Lett.*, vol. 108, no. arXiv:1201.2717, p. 113002, Jan 2012.
- [10] M. Hori, “The ASACUSA experiment at CERN’s Anti-proton Decelerator,” *Nucl.Phys.*, vol. A692, pp. 119–128, 2001.
- [11] J. S. Hangst and P. Bowe, “Alpha proposal,” CERN, Geneva, Tech. Rep. CERN-SPSC-2005-006. SPSC-P-325, Jan 2005.
- [12] Y. Kadi, A. P. Bernardes, Y. Blumenfeld, S. Calatroni, R. Catherall, M. A. Fraser, B. Goddard, D. Parchet, E. Siesling, W. Venturini Delsolaro, D. Voulot, and L. R. Williams, “Status and future perspectives of the hie-isolde project at cern,” *Conf. Proc.*, vol. C1205201, no. CERN-ATS-2012-251, p. PAGE. 4 p, May 2012.
- [13] C. J. Maggiore, N. Agazaryan, N. Bassler, E. Blackmore, G. Beyer, J. J. De Marco, M. Doser, C. R. Gruhn, M. H. Holzscheiter, T. Ichioka, K. S. Iwamoto, H. V. Knudsen, R. Landua, W. H. McBride, S. P. Møller, J. Petersen, J. B. Smathers, L. D. Skarsgard, T. Solberg, U. Uggerhøj, H. R. Withers, and B. G. Wouters, “Biological effectiveness of antiproton annihilation,” *Nucl. Instrum. Methods Phys. Res., B*, vol. 214, pp. 181–5, 2004.
- [14] *ATLAS detector and physics performance: Technical Design Report, 1*, ser. Technical Design Report ATLAS. Geneva: CERN, 1999, electronic version not available.

- [15] “Cms : the compact muon solenoid; 1993 ed.” CERN, Geneva, Tech. Rep. CERN-LHCC-93-48, 1993.
- [16] *LHCb : Technical Proposal*, ser. Tech. Proposal. Geneva: CERN, 1998.
- [17] C. Lourenco, “Heavy ion collisions at the lhc: the alice experiment. oai:cds.cern.ch:315992,” no. hep-ph/9612221. LIP-96-02, 1996.
- [18] E. McCrory and V. Shiltsev, “Characterizing luminosity evolution in the tevatron,” 2005.
- [19] B. Holzer, “Transverse beam dynamics,” Introductory CERN Accelerator School, 2010.
- [20] J. Le Duff, “Longitudinal beam dynamics,” Introductory CERN Accelerator School, 2010.
- [21] L. Laslett, V. Neil, and A. Sessler, “Transverse Resistive Instabilities of Intense Coasting Beams in Particle Accelerators,” *Rev.Sci.Instrum.*, vol. 36, pp. 436–448, 1965.
- [22] G. V. Stupakov, “Wake and impedance,” pp. 205–230, 2000.
- [23] G. V. Stupakov, “Surface roughness impedance,” pp. 141–152, 2000.
- [24] G. V. Stupakov, “Advances in impedance theory,” 2009.
- [25] N. Mounet, L. Rivkin, and E. Métral, “The lhc transverse coupled-bunch instability,” Ph.D. dissertation, Lausanne, EPFL, Mar 2012, presented 2012.
- [26] L. Palumbo, V. Vaccaro, and M. Zobov, “Wake fields and impedance,” 1994.
- [27] A. Wolski, “Theory of electromagnetic fields,” RF for Accelerators, CERN Accelerator School, 2010.
- [28] E. Jensen, “Cavity basics,” RF for Accelerators, CERN Accelerator School, 2010.

- [29] A. W. Chao, *Physics of collective beam instabilities in high energy accelerators*. New York, NY: Wiley, 1993.
- [30] F. Roncarolo, F. Caspers, T. Kroyer, E. Metral, N. Mounet, B. Salvant, and B. Zotter, “Comparison between laboratory measurements, simulations, and analytical predictions of the transverse wall impedance at low frequencies,” *Phys. Rev. Lett.*, vol. 12, no. CERN-BE-2010-005. 8, p. 084401. 1 p, Aug 2009.
- [31] E. Métral, “Transverse resistive-wall impedance from very low to very high frequencies,” CERN, Geneva, Tech. Rep. CERN-AB-2005-084, Aug 2005.
- [32] H. Tsutsui, “Some simplified models of ferrite kicker magnet for calculation of longitudinal coupling impedance,” CERN, Geneva, Tech. Rep. CERN-SL-2000-004-AP, Jan 2000.
- [33] N. Biancacci, V. Vaccaro, E. Métral, B. Salvant, M. Migliorati, and L. Palumbo, “The mode matching method applied to beam coupling impedance calculations of finite length devices,” CERN, Geneva, Tech. Rep. CERN-ATS-2012-187, May 2012.
- [34] N. Mounet and E. Métral, “Electromagnetic fields created by a macroparticle in an infinitely long and axisymmetric multilayer beam pipe,” CERN, Geneva, Tech. Rep. CERN-BE-2009-039, Nov 2009.
- [35] N. Mounet and E. Métral, “Electromagnetic fields and beam coupling impedances in a multilayer flat chamber,” CERN, Geneva, Tech. Rep. CERN-ATS-2010-056, Dec 2010.
- [36] K. Y. Ng, *Physics of Intensity Dependent Beam Instabilities*. New Jersey, NJ: World Scientific, 2006.
- [37] A. Grudiev, “Simulation of longitudinal and transverse impedances of trapped modes in lhc secondary collimator,” CERN, Geneva, Tech. Rep. AB-Note-2005-042. CERN-AB-Note-2005-042, Dec 2005.

- [38] A. Grudiev, “Simulation and reduction of longitudinal and transverse impedances of a collimation device with two beams in one vacuum chamber,” Tech. Rep. LHC-Project-note-413, Mar 2008.
- [39] A. Burov and V. Lebedev, “Transverse instabilities of coasting beams with space charge,” Tech. Rep. arXiv:0812.3887. FERMILAB-PUB-08-479-AD, Dec 2008.
- [40] O. Boine-Frankenheim, I. Hofmann, and V. Kornilov, “Instabilities and space charge effects in high intensity ring accelerators,” p. 5 p, 2006.
- [41] T. Pieloni, W. Herr, A. Bay, and L. Rivkin, “A study of beam-beam effects in hadron colliders with a large number of bunches,” Ph.D. dissertation, Ecole Polytechnique, Lausanne, Milan U., 2008, presented on 4 Dec 2008.
- [42] K. S. B. Li and G. Rumolo, “Review of beam instabilities in the presence of electron clouds in the lhc,” no. CERN-ATS-2011-095, p. 3 p, Sep 2011.
- [43] M. Schaumann, J. Jowett, and R. Bruce, “Intra-beam scattering and luminosity evolution for hl-lhc proton beams,” CERN, Geneva, Tech. Rep. CERN-ATS-2012-290, Dec 2012.
- [44] T. Mertens, J. Jowett, and M. Sousa Da Costa, “Intrabeam scattering in the lhc,” Ph.D. dissertation, Porto U., Porto, 2011, presented 17 Jun 2011.
- [45] T. Bohl, A. Hofmann, T. P. R. Linnecar, E. Shaposhnikova, and J. Tückmantel, “Energy loss of a single bunch in the sps,” CERN, Geneva, Tech. Rep. AB-Note-2004-017, Mar 2004.
- [46] T. Argyropoulos, T. Bohl, A. Burov, R. Calaga, L. Ficcadenti, E. Metral, N. Mounet, T. Mastoridis, J. Esteban Muller, V. Kain, G. Papotti, F. Roncarolo, and E. Shaposhnikova, “Studies of the lhc impedance at injection energy,” Tech. Rep. CERN-ATS-2012-060 MD, Jul 2012.
- [47] F. J. Sacherer, “Single-beam collective phenomena: transverse ii bunched beams,” 1st International School on Particle Accelerators, 1977.

- [48] R. L. Gluckstern and R. Li, “Analysis of coaxial wire measurement of longitudinal coupling impedance,” *Part. Accel.*, vol. 29, no. DOE-ER-10666-1. CONF-890803-7, pp. 159–166. 8 p, 1989.
- [49] V. G. Vaccaro, “Coupling impedance measurements: an improved wire method,” INFN, Rome, Tech. Rep. INFN-TC-94-023, Nov 1994.
- [50] H. Hahn, “Interpretation of coupling impedance bench measurements,” *Phys. Rev. ST Accel. Beams*, vol. 7, p. 012001, Jan 2004. [Online]. Available: <http://link.aps.org/doi/10.1103/PhysRevSTAB.7.012001>
- [51] E. Jensen, “An improved log-formula for homogeneously distributed impedance,” CERN, Geneva, Tech. Rep. CERN-PS-RF-NOTE-2000-001, Jan 2000.
- [52] H. Tsutsui, “On single wire technique for transverse coupling impedance measurement,” CERN, Geneva, Tech. Rep. SL-Note-2002-034-AP, Oct 2002.
- [53] T. Kroyer, “Simulation of the low-frequency collimator impedance,” CERN, Geneva, Tech. Rep. CERN-AB-Note-2008-017, Apr 2008.
- [54] H. Tsutsui and L. Vos, “Transverse coupling impedance of a simplified ferrite kicker magnet model,” CERN, Geneva, Tech. Rep. LHC-PROJECT-NOTE-234, Sep 2000.
- [55] B. Salvant, N. Mounet, C. Zannini, E. Métral, and G. Rumolo, “Quadrupolar transverse impedance of simple models of kickers,” Tech. Rep. CERN-ATS-2010-076, Jun 2010.
- [56] C. Zannini, G. Rumolo, and V. Vaccaro, “Effect of the tem mode on the kicker impedance,” CERN, Geneva, Tech. Rep. CERN-ATS-2012-134, May 2012.
- [57] M. Masullo, V. Vaccaro, and M. Panniello, “The stretched wire method: A comparative analysis performed by means of the mode matching technique,” in *LINAC’10*, no. THP081, Napoli, Italy, May 2010.

- [58] I. Zagorodnov and T. Weiland, “Te/tm field solver for particle beam simulations without numerical cherenkov radiation,” *Phys. Rev. ST Accel. Beams*, vol. 8, p. 042001, Apr 2005.
- [59] Y.-H. Chin, “User’s guide for ABCI version 9.4 (Azimuthal beam cavity interaction) and introducing the ABCI Windows application package,” Tech. Rep., 2005.
- [60] “<http://www.cst.com>.”
- [61] “<http://www.ansoft.com>.”
- [62] “<https://www.ansoft.com>.”
- [63] T. Weiland, M. Bartsch, U. Becker, M. Bihm, U. Blell *et al.*, “MAFIA Version 4,” *AIP Conf.Proc.*, vol. 391, pp. 65–70, 1997.
- [64] “<https://www.gdfidl.de>.”
- [65] C. Ng, V. Akcelik, A. Candel, S. Chen, N. Folwell, L. Ge, A. Guetz, H. Jiang, A. Kabel, K. Ko, L. Q. Lee, Z. Li, E. Prudencio, G. Schussman, R. Updinchwar, and L. Xiao, “State of the art in em field computation,” Tech. Rep. SLAC-PUB-12020, Sep 2006.
- [66] O. Kononenko and A. Grudiev, “Transient beam-loading model and compensation in compact linear collider main linac,” *Phys. Rev. ST Accel. Beams*, vol. 14, p. 111001, Nov 2011.
- [67] B. Podobedov and S. Krinsky, “Transverse impedance of axially symmetric tapered structures,” *Phys. Rev. ST Accel. Beams*, vol. 9, p. 054401, May 2006.
- [68] B. Salvant, H. Day, A. Grudiev, O. Kononenim, and E. Métral, “Cst simulations of vmtsa.” Geneva: Presented at 03/04/2012 LRRF Task Force Meeting. Available at <http://emetral.web.cern.ch/emetral/LRFF/LRFF20meetings.htm>, April 2012.

- [69] F. Caspers, G. Dôme, C. González, E. Jensen, E. Keil, M. Morvillo, F. Ruggiero, G. Schröder, B. W. Zotter, and M. Dyachkov, “Rf screening by thin resistive layers,” Tech. Rep. LHC-Project-Report-300. CERN-LHC-Project-Report-300, Apr 1999.
- [70] T. Kroyer, F. Caspers, and E. Gaxiola, “Longitudinal and transverse wire measurements for the evaluation of impedance reduction measures on the mke extraction kickers,” CERN, Geneva, Tech. Rep. AB-Note-2007-028. CERN-AB-Note-2007-028, Jul 2007.
- [71] H. Klingbeil, “Ferrite cavities,” RF for Accelerators, CERN Accelerator School, 2010.
- [72] R. Schmidt, R. W. Assmann, E. Carlier, B. Dehning, R. Denz, B. Goddard, E. B. Holzer, V. Kain, B. Puccio, B. Todd, J. Uythoven, J. Wenninger, and M. Zerlauth, “Lhc machine protection,” no. LHC-PROJECT-Report-1053. CERN-LHC-PROJECT-Report-1053, p. 5 p, 2007.
- [73] M. Zerlauth, “Machine protection.” Geneva: Presented at Chamonix 2012 LHC Performance Workshop, February 2012.
- [74] A. Bertarelli, G. Arnau Izquierdo, F. Carra, A. Dallocchio, M. Gil Costa, and N. Mariani, “Research and development of novel advanced materials for next-generation collimators,” Tech. Rep. CERN-ATS-2011-224, Nov 2011.
- [75] A. Bertarelli, “Preliminary results of advanced material tests using sample holder.” Geneva: Presented at 15th October 2012 Meeting of the Collimator Working Group, CERN, October 2012.
- [76] E. Métral, F. Caspers, A. Grudiev, T. Kroyer, B. Zotter, F. Roncarolo, and B. Salvant, “Impedance studies for the phase 2 lhc collimators,” Tech. Rep. CERN-ATS-2009-040, Sep 2009.

- [77] G. Valentino, R. Aßmann, R. Bruce, S. Redaelli, A. Rossi, N. Sammut, and D. Wollmann, “Semiautomatic beam-based lhc collimator alignment,” *Phys. Rev. ST Accel. Beams*, vol. 15, p. 051002, May 2012.
- [78] G. Valentino, “Preliminary results from sps bpm-equipped collimator mds.” Geneva: Presented at 26th November 2012 Meeting of the Collimator Working Group, CERN, November 2012.
- [79] A. Dallocchio, A. Bertarelli, C. Boccard, F. Carra, M. Gasior, L. Gentini, and M. A. Timmins, “Lhc collimators with embedded beam position monitors: A new advanced mechanical design,” no. CERN-ATS-2011-228, p. 4 p, Nov 2011.
- [80] B. Salvant, “Beam induced heating.” Geneva: Presented at Evian LHC Beam Operation Workshop, December 2011.
- [81] “<http://www.ansys.com/>.”
- [82] “Tt2-111r data sheet available at http://www.trans-techinc.com/products_detail”
- [83] H. Day, M. Barnes, F. Caspers, E. Métral, B. Salvant, C. Zannini, and R. Jones, “Coaxial wire measurements of ferrite kicker magnets,” Tech. Rep. CERN-ATS-2011-275, Oct 2011.
- [84] M. J. Barnes, F. Caspers, T. Kroyer, E. Métral, F. Roncarolo, and B. Salvant, “Measurement of the longitudinal and transverse impedance of kicker magnets using the coaxial wire method,” Tech. Rep. CERN-ATS-2009-018, Jul 2009.
- [85] M. J. Barnes, F. Caspers, K. Cornelis, L. Ducimetière, E. Mahner, G. Papotti, G. Ru-molo, V. Senaj, and E. Shaposhnikova, “Measurement and analysis of sps kicker magnet heating and outgassing with different bunch spacing,” Tech. Rep. CERN-ATS-2009-017, Jul 2009.
- [86] C. Belver-Aguilar, A. Faus-Golfe, M. J. Barnes, F. Toral, and I. Podadera, “Beam impedance study of the stripline kicker for the clic damping ring,” CERN, Geneva, Tech. Rep. CERN-ATS-2012-222, Aug 2012.

- [87] L. Vos, “Beam screens in the lhc injection kicker magnets?” CERN, Geneva, Tech. Rep. LHC-Project-Note-131, Feb 1998.
- [88] M. J. Barnes, F. Caspers, L. Ducimetière, N. Garrel, and T. Kroyer, “An improved beam screen for the lhc injection kickers,” Tech. Rep. LHC-PROJECT-Report-1029. CERN-LHC-PROJECT-Report-1029, 2007.
- [89] F. Caspers, C. González, H. Tsutsui, and M. Dyachkov, “Impedance measurements on the lhc injection kicker prototype,” CERN, Geneva, Tech. Rep. LHC-PROJECT-NOTE-219, Mar 2000, revised version number 1 submitted on 2000-03-17 14:16:47.
- [90] F. Caspers and A. Mostacci, “Bench measurements of the lhc injection kicker low frequency impedance properties,” CERN, Geneva, Tech. Rep. SL-Note-2002-030-AP, Oct 2002.
- [91] B. Goddard, “Mki heating 2011 – more observations.” Geneva: Presented at 2nd February 2012 Meeting of the MKI Strategy Meeting, CERN, February 2012.
- [92] M. J. Barnes, L. Ducimetière, N. Garrel, B. Goddard, V. Mertens, and W. Weterings, “Analysis of ferrite heating of the lhc injection kickers and proposals for future reduction of temperature,” CERN, Geneva, Tech. Rep. CERN-ATS-2012-211, Aug 2012.
- [93] M. Garlasche, “Mki heating 2011 – more observations.” Geneva: Presented at 2nd August 2012 Meeting of the MKI Strategy Meeting, CERN, August 2012.
- [94] M. Barnes and P. Adrakata, “Electric field on surface of ceramic and cr₂o₃.” Geneva: Presented at 31st October 2012 Meeting of the MKI Strategy Meeting, CERN, October 2012.
- [95] M. Barnes, W. Weterings, and V. Namora, “Mki tank#12, inside, emissivity.” Geneva: Presented at 27th November 2012 Meeting of the MKI Strategy Meeting, CERN, November 2012.

- [96] M. Garlasche, “Mki heating 2011 – more observations.” Geneva: Presented at 12th November 2012 Meeting of the MKI Strategy Meeting, CERN, November 2012.
- [97] M. Barnes and W. Weterings, “Emissivity of mki tank.” Geneva: Presented at 16th March 2012 Meeting of the MKI Strategy Meeting, CERN, March 2012.

Appendix A

TCTP Eigenmode Simulations - No Ferrite

| | | | |
|-------|------|---------|-------|
| 1.023 | 500 | 0.00052 | 0.3 |
| 1.053 | 725 | 0.00419 | 3.0 |
| 1.070 | 609 | 0.00040 | 0.2 |
| 1.119 | 462 | 0.02717 | 12.6 |
| 1.127 | 658 | 0.00006 | 0.0 |
| 1.161 | 432 | 0.00291 | 1.3 |
| 1.181 | 436 | 0.00251 | 1.1 |
| 1.187 | 1070 | 0.00422 | 4.5 |
| 1.195 | 509 | 0.01165 | 5.9 |
| 1.235 | 377 | 0.01146 | 4.3 |
| 1.207 | 453 | 0.45465 | 205.8 |
| 1.268 | 500 | 0.00201 | 1.0 |
| 1.280 | 404 | 0.01590 | 6.4 |
| 1.282 | 717 | 0.02778 | 19.9 |
| 1.291 | 551 | 0.13380 | 73.7 |
| 1.300 | 568 | 0.27971 | 158.9 |

| f (GHz) | Q | R/Q (Ω) | R_s (Ω) |
|-----------|------|--------------------|--------------------|
| 1.304 | 434 | 0.26437 | 114.7 |
| 0.131 | 233 | 0.00017 | 0.0 |
| 1.313 | 390 | 0.19889 | 77.5 |
| 1.322 | 297 | 0.00566 | 1.7 |
| 1.325 | 282 | 0.00026 | 0.1 |
| 1.331 | 602 | 0.10319 | 62.1 |
| 1.341 | 188 | 0.00001 | 0.0 |
| 1.342 | 197 | 0.03311 | 6.5 |
| 1.346 | 111 | 0.00026 | 0.0 |
| 1.357 | 421 | 0.01681 | 7.1 |
| 1.363 | 516 | 0.51441 | 265.5 |
| 1.365 | 514 | 0.34623 | 178.1 |
| 1.378 | 772 | 0.00637 | 4.9 |
| 1.392 | 519 | 0.09893 | 51.4 |
| 1.396 | 553 | 0.00465 | 2.6 |
| 1.417 | 696 | 0.07621 | 53.0 |
| 1.424 | 679 | 0.06070 | 41.2 |
| 1.429 | 521 | 0.02521 | 13.1 |
| 1.445 | 567 | 0.00123 | 0.7 |
| 1.454 | 926 | 0.00029 | 0.3 |
| 1.459 | 572 | 0.00005 | 0.0 |
| 1.464 | 990 | 0.00001 | 0.0 |
| 1.476 | 1052 | 0.00006 | 0.1 |
| 1.479 | 1097 | 0.00002 | 0.0 |
| 1.487 | 669 | 0.00790 | 5.3 |
| 1.495 | 627 | 0.01068 | 6.7 |
| 1.504 | 647 | 0.00006 | 0.0 |

| f (GHz) | Q | R/Q (Ω) | R_s (Ω) |
|-----------|------|--------------------|--------------------|
| 1.522 | 597 | 0.00917 | 5.5 |
| 1.524 | 852 | 0.00020 | 0.2 |
| 1.554 | 535 | 0.00107 | 0.6 |
| 1.556 | 909 | 0.00044 | 0.4 |
| 1.559 | 931 | 0.00044 | 0.4 |
| 1.580 | 795 | 0.01642 | 13.0 |
| 1.587 | 909 | 0.00133 | 1.2 |
| 1.589 | 929 | 0.00101 | 0.9 |
| 1.607 | 716 | 0.00000 | 0.0 |
| 1.609 | 610 | 0.00448 | 2.7 |
| 1.612 | 747 | 0.00000 | 0.0 |
| 1.615 | 827 | 0.00062 | 0.5 |
| 1.624 | 646 | 0.00004 | 0.0 |
| 1.632 | 844 | 0.00000 | 0.0 |
| 1.636 | 914 | 0.00016 | 0.1 |
| 1.643 | 449 | 0.00006 | 0.0 |
| 1.649 | 845 | 0.00012 | 0.1 |
| 1.653 | 617 | 0.00347 | 2.1 |
| 1.680 | 928 | 0.00110 | 1.0 |
| 1.683 | 762 | 0.00027 | 0.2 |
| 1.690 | 593 | 0.00321 | 1.9 |
| 1.698 | 768 | 0.00002 | 0.0 |
| 1.709 | 1058 | 0.00000 | 0.0 |
| 1.711 | 1046 | 0.00810 | 8.5 |
| 1.716 | 829 | 0.00002 | 0.0 |
| 1.722 | 997 | 0.00000 | 0.0 |
| 1.732 | 953 | 0.00001 | 0.0 |

| f (GHz) | Q | R/Q (Ω) | R_s (Ω) |
|-----------|------|--------------------|--------------------|
| 1.734 | 760 | 0.00002 | 0.0 |
| 1.743 | 894 | 0.00018 | 0.2 |
| 1.744 | 860 | 0.00092 | 0.8 |
| 1.748 | 882 | 0.00062 | 0.5 |
| 1.759 | 773 | 0.00007 | 0.1 |
| 1.767 | 723 | 0.00021 | 0.2 |
| 1.780 | 802 | 0.00226 | 1.8 |
| 1.785 | 858 | 0.00094 | 0.8 |
| 1.789 | 942 | 0.00034 | 0.3 |
| 1.795 | 646 | 0.00301 | 1.9 |
| 1.800 | 719 | 0.00030 | 0.2 |
| 1.801 | 985 | 0.00109 | 1.1 |
| 1.816 | 670 | 0.00013 | 0.1 |
| 1.825 | 924 | 0.00019 | 0.2 |
| 1.829 | 650 | 0.00001 | 0.0 |
| 1.832 | 1061 | 0.00005 | 0.1 |
| 1.837 | 351 | 0.00071 | 0.2 |
| 1.842 | 367 | 0.00044 | 0.2 |
| 1.858 | 641 | 0.00249 | 1.6 |
| 1.869 | 961 | 0.00063 | 0.6 |
| 1.882 | 1202 | 0.00046 | 0.5 |
| 1.883 | 396 | 0.00121 | 0.5 |
| 1.888 | 857 | 0.00371 | 3.2 |
| 1.895 | 1100 | 0.00050 | 0.6 |
| 1.897 | 688 | 0.00570 | 3.9 |
| 1.903 | 1039 | 0.00007 | 0.1 |
| 1.910 | 710 | 0.00000 | 0.0 |

| f (GHz) | Q | R/Q (Ω) | R_s (Ω) |
|-----------|------|--------------------|--------------------|
| 1.920 | 968 | 0.00000 | 0.0 |
| 1.930 | 219 | 0.05093 | 11.2 |
| 1.932 | 189 | 0.09952 | 18.8 |
| 1.944 | 588 | 0.03731 | 21.9 |
| 1.948 | 1048 | 0.00053 | 0.6 |
| 1.952 | 1027 | 0.01573 | 16.2 |
| 1.959 | 597 | 0.00651 | 3.9 |
| 1.966 | 643 | 0.04869 | 31.3 |
| 1.974 | 724 | 0.00005 | 0.0 |
| 1.993 | 627 | 0.00039 | 0.2 |
| 0.200 | 162 | 0.00090 | 0.1 |
| 0.260 | 333 | 0.00051 | 0.2 |
| 0.305 | 250 | 0.00152 | 0.4 |
| 0.315 | 312 | 0.00002 | 0.0 |
| 0.383 | 542 | 0.00091 | 0.5 |
| 0.388 | 399 | 0.00088 | 0.4 |
| 0.425 | 214 | 0.00152 | 0.3 |
| 0.484 | 488 | 0.00308 | 1.5 |
| 0.514 | 461 | 0.00199 | 0.9 |
| 0.514 | 452 | 0.00188 | 0.8 |
| 0.532 | 232 | 0.00192 | 0.4 |
| 0.586 | 444 | 0.00004 | 0.0 |
| 0.614 | 424 | 0.04269 | 18.1 |
| 0.633 | 213 | 0.00168 | 0.4 |
| 0.636 | 249 | 0.00180 | 0.4 |
| 0.641 | 453 | 0.11620 | 52.7 |
| 0.665 | 411 | 0.06443 | 26.5 |

| f (GHz) | Q | R/Q (Ω) | R_s (Ω) |
|-----------|-----|--------------------|--------------------|
| 0.715 | 357 | 0.14033 | 50.1 |
| 0.716 | 362 | 0.14259 | 51.7 |
| 0.726 | 292 | 0.03288 | 9.6 |
| 0.750 | 365 | 0.01933 | 7.1 |
| 0.753 | 515 | 0.00803 | 4.1 |
| 0.781 | 344 | 0.10722 | 36.9 |
| 0.824 | 661 | 0.00063 | 0.4 |
| 0.826 | 306 | 0.00198 | 0.6 |
| 0.829 | 665 | 0.00061 | 0.4 |
| 0.851 | 342 | 0.04860 | 16.6 |
| 0.859 | 478 | 0.04383 | 20.9 |
| 0.863 | 628 | 0.00014 | 0.1 |
| 0.874 | 433 | 0.00005 | 0.0 |
| 0.902 | 509 | 0.00124 | 0.6 |
| 0.930 | 406 | 0.00161 | 0.7 |
| 0.941 | 460 | 0.22196 | 102.1 |
| 0.945 | 318 | 0.00803 | 2.6 |
| 0.962 | 536 | 0.00003 | 0.0 |
| 0.983 | 360 | 0.02222 | 8.0 |

Appendix B

TCTP Eigenmode Simulations - With Ferrite

| f (GHz) | Q | R/Q (Ω) | R_s (Ω) |
|-----------|-----|--------------------|--------------------|
| 1.008 | 7 | 0.14378 | 1.0 |
| 1.019 | 78 | 0.19377 | 15.2 |
| 1.027 | 100 | 0.07519 | 7.5 |
| 1.042 | 21 | 0.04155 | 0.9 |
| 1.052 | 306 | 0.00385 | 1.2 |
| 1.071 | 116 | 0.00176 | 0.2 |
| 1.074 | 111 | 0.00204 | 0.2 |
| 1.075 | 147 | 0.00742 | 1.1 |
| 1.085 | 92 | 0.03424 | 3.1 |
| 1.126 | 215 | 0.00021 | 0.0 |
| 1.133 | 31 | 0.03086 | 1.0 |
| 1.142 | 60 | 0.22597 | 13.5 |
| 1.175 | 67 | 0.00764 | 0.5 |
| 1.216 | 31 | 0.76573 | 23.6 |
| 1.227 | 62 | 0.04137 | 2.6 |

| f (GHz) | Q | R/Q (Ω) | R_s (Ω) |
|-----------|-----|--------------------|--------------------|
| 1.240 | 188 | 0.15624 | 29.4 |
| 0.130 | 80 | 0.00003 | 0.0 |
| 1.300 | 126 | 0.23688 | 29.9 |
| 1.314 | 168 | 0.00333 | 0.6 |
| 1.371 | 78 | 0.47218 | 36.8 |
| 1.404 | 157 | 0.04230 | 6.6 |
| 1.476 | 33 | 0.00084 | 0.0 |
| 1.501 | 76 | 0.00781 | 0.6 |
| 1.507 | 92 | 0.00004 | 0.0 |
| 1.545 | 49 | 0.00978 | 0.5 |
| 1.550 | 105 | 0.01460 | 1.5 |
| 1.578 | 32 | 0.00014 | 0.0 |
| 1.613 | 37 | 0.00006 | 0.0 |
| 1.636 | 13 | 0.00539 | 0.1 |
| 1.675 | 65 | 0.00010 | 0.0 |
| 1.679 | 64 | 0.00006 | 0.0 |
| 1.715 | 160 | 0.00133 | 0.2 |
| 1.723 | 206 | 0.00028 | 0.1 |
| 1.734 | 116 | 0.00010 | 0.0 |
| 1.770 | 83 | 0.00143 | 0.1 |
| 1.782 | 137 | 0.00064 | 0.1 |
| 1.792 | 113 | 0.00103 | 0.1 |
| 1.796 | 110 | 0.00103 | 0.1 |
| 1.806 | 33 | 0.00003 | 0.0 |
| 1.840 | 69 | 0.00051 | 0.0 |
| 1.844 | 16 | 0.00665 | 0.1 |
| 1.862 | 51 | 0.00057 | 0.0 |

| f (GHz) | Q | R/Q (Ω) | R_s (Ω) |
|-----------|-----|--------------------|--------------------|
| 1.895 | 113 | 0.00397 | 0.5 |
| 1.919 | 41 | 0.00341 | 0.1 |
| 1.926 | 164 | 0.04103 | 6.7 |
| 1.933 | 75 | 0.00397 | 0.3 |
| 1.937 | 123 | 0.00103 | 0.1 |
| 1.969 | 36 | 0.00131 | 0.0 |
| 1.973 | 35 | 0.00130 | 0.0 |
| 2.006 | 59 | 0.00241 | 0.1 |
| 0.227 | 1 | 0.00377 | 0.0 |
| 0.241 | 1 | 0.01920 | 0.0 |
| 0.251 | 1 | 0.00910 | 0.0 |
| 0.295 | 18 | 0.00354 | 0.1 |
| 0.320 | 11 | 0.00180 | 0.0 |
| 0.388 | 56 | 0.00293 | 0.2 |
| 0.405 | 2 | 0.12558 | 0.3 |
| 0.409 | 41 | 0.00228 | 0.1 |
| 0.416 | 1 | 0.11308 | 0.1 |
| 0.493 | 12 | 0.00335 | 0.0 |
| 0.504 | 4 | 0.19510 | 0.8 |
| 0.512 | 50 | 0.00053 | 0.0 |
| 0.512 | 50 | 0.00044 | 0.0 |
| 0.515 | 138 | 0.00727 | 1.0 |
| 0.547 | 2 | 0.06283 | 0.1 |
| 0.585 | 5 | 0.41263 | 2.1 |
| 0.589 | 5 | 0.45154 | 2.1 |
| 0.606 | 39 | 0.00195 | 0.1 |
| 0.625 | 18 | 0.09450 | 1.7 |

| f (GHz) | Q | R/Q (Ω) | R_s (Ω) |
|-----------|-----|--------------------|--------------------|
| 0.636 | 223 | 0.01395 | 3.1 |
| 0.653 | 5 | 0.41565 | 2.1 |
| 0.657 | 2 | 0.12553 | 0.2 |
| 0.703 | 42 | 0.00036 | 0.0 |
| 0.750 | 29 | 0.01932 | 0.6 |
| 0.752 | 140 | 0.02023 | 2.8 |
| 0.761 | 5 | 0.38464 | 1.9 |
| 0.842 | 113 | 0.00376 | 0.4 |
| 0.855 | 90 | 0.06217 | 5.6 |
| 0.864 | 6 | 0.32443 | 1.9 |
| 0.889 | 2 | 0.14481 | 0.4 |
| 0.901 | 50 | 0.00105 | 0.1 |
| 0.924 | 83 | 0.00009 | 0.0 |
| 0.938 | 61 | 0.25099 | 15.4 |
| 0.959 | 14 | 0.13559 | 1.9 |