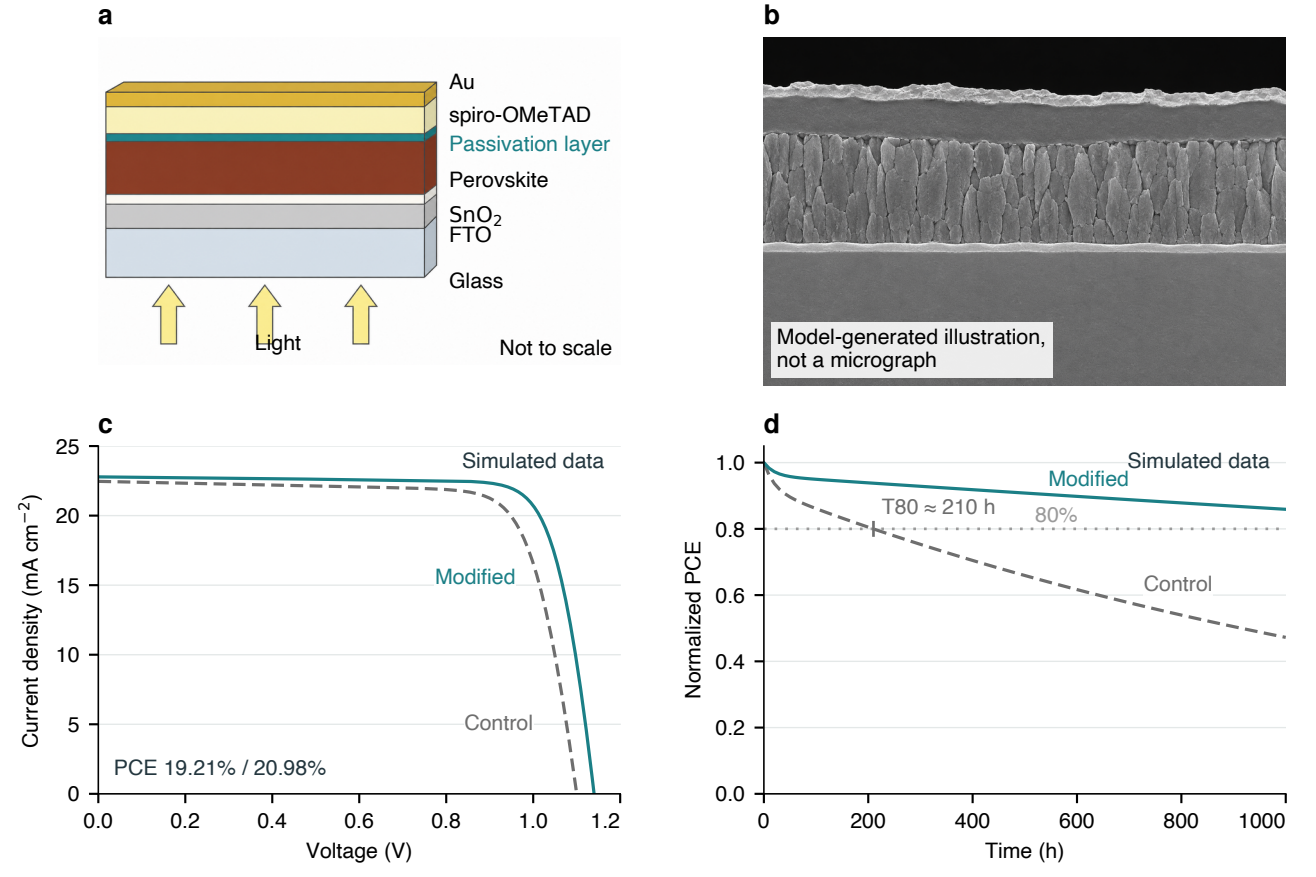

a
Au
spiro-OMeTAD
Passivation layer
Perovskite
SnO2
FTO
Glass
Light
Not to scale
b
Model-generated illustration,
not a micrograph
c
Simulated data
Modified
Control
PCE 19.21% / 20.98%
Current density (mA cm−2)
Voltage (V)
d
Simulated data
Modified
T80 ≈ 210 h
80%
Control
Normalized PCE
Time (h)