

A passivation layer was added at the perovskite/HTL interface

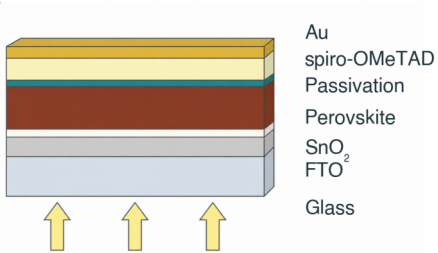


All other layers match the control

Schematic, not to scale

Modified device PCE rises from 19.2% to 21.0% (simulated d

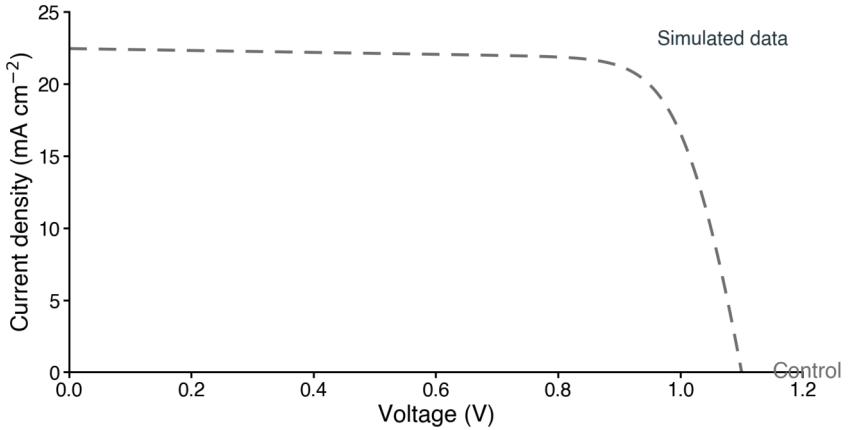

Modified device PCE rises from 19.2% to 21.0% (simulated d

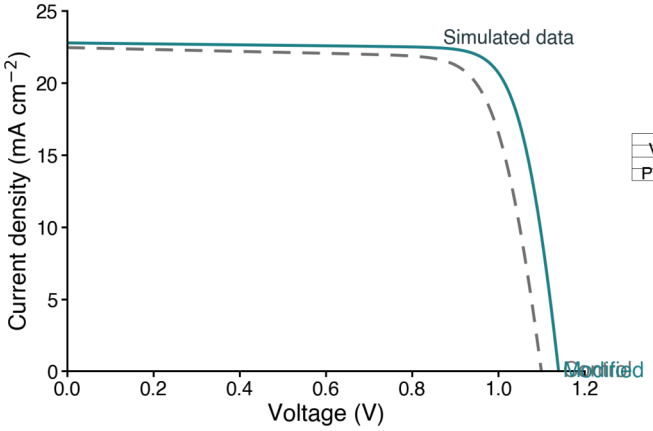

	Control	Modified
V_{OC} (V)	1.10	1.14
FF	0.78	0.81
PCE (%)	19.21	20.98

After 1000 h, modified retains ~86% of initial efficiency, contr

