
nterfacial passivation raise both initial efficiency and stab


Modified device shows higher PCE and retention in simulated teaching data

What we changed

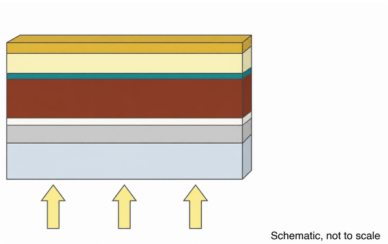


Schematic, not to scale


After 1000 h, modified retains ~86% of initial efficiency

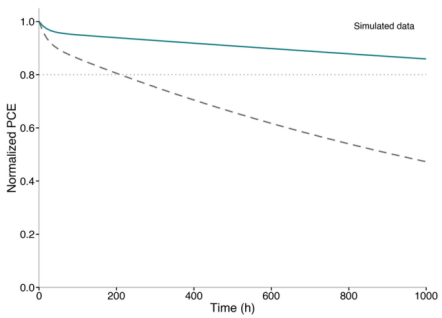

Modified device PCE rises from 19.2% to 21.0% (simulated data)

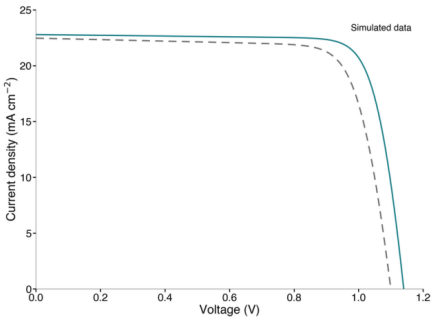

- Planar n-i-p stack; passivation at interface (modified)
- Simulated reverse-scan J–V (single-diode model)
- MPP tracking stability under illumination (simulated)
- Colour: grey = control, teal = modified
- One representative curve per group



A0 portrait · 841 × 1189 mm

Title

View at 3–5 m

Findings

1–2 m

0.5 m

2

3

20 mm

Detail

4

30 mm margin