


102563 Harness SA Data C

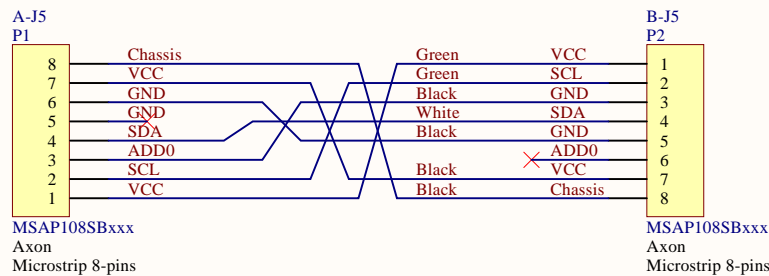

Wiring Chart				
P1	P2	Colour	Item	Signal
1	1	Green	E	VCC
2	2	Green	B	SCL
3	3	Black	B	GND
4	4	White	C	SDA
6	5	Black	C	ADD0 / GND
7	7	Black	F	VCC
8	8	Black	D	Chassis

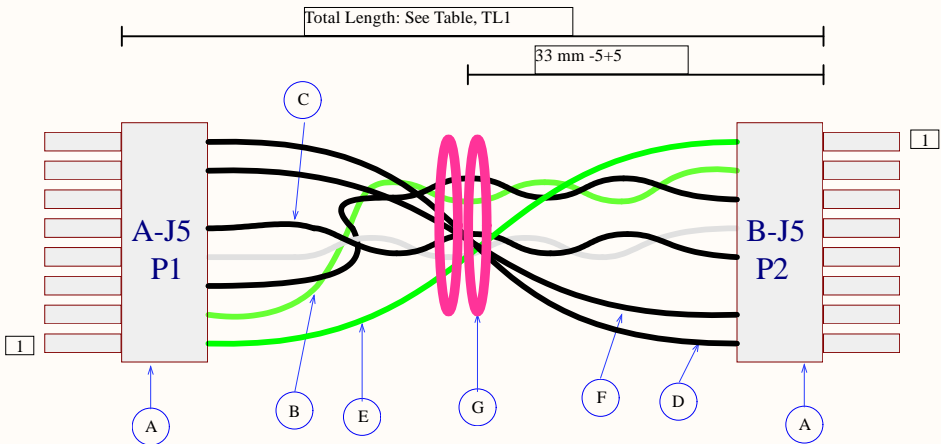


Table			
Var.	IFS P/N	CL1 [mm]	TL1 [mm]
1	102563	N/A	65 -0+8

General tolerance: +-0.1 mm, +-1°

Item	Quantity	Manufacturer P/N	Manufacturer	Comments	IFS ID
A	2	MSAP108SB	Axon Cables S.A.S	Microstrip 8-pin, female	103369
B	1	2xKT3007^BG	Axon Cables S.A.S	30 AWG FEP B/G Twist	103393
C	1	2xKT3007^BL	Axon Cables S.A.S	30 AWG FEP B/W Twist	103394
D	1	KT2419^B	Axon Cables S.A.S	24 AWG FEP Black	103382
E	1	KT3007^G	Axon Cables S.A.S	30 AWG FEP Green	103391
F	1	KT3007^D	Axon Cables S.A.S	30 AWG FEP Black	103392
G	1	To come	To come	Braided Polyester Lacing Tape, Type II	

ALL ARTICLES TO BE PRODUCED IN ACCORDANCE WITH: - IPC/WHMA-A-620C CLASS III - MANUFACTURER SPECIFIC RECOMMENDATIONS AND DESCRIPTIONS UNLESS OTHERWISE SPECIFIED	
102563 Harness SA Data C	
IFS document nr.: 1008457	GOMSPACE
Revision: 01	
Project: gs-hn-NanoHarness-SA_Data_C.PrjPcb	
Engineer: SRYT	
Date: 28-05-2018	
State of drawing: Preliminary	

Confidential - DO NOT DISTRIBUTE
Copyright © 2018 by GomSpace A/S
Langagervej 6
9220 Aalborg East
Denmark