


102565 Harness SA PV E

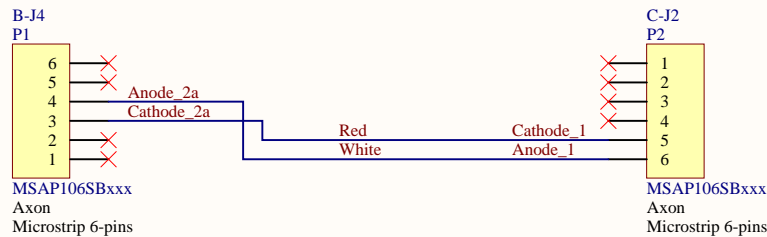

Wiring Chart			
P1	P2	Colour	Signal
4	6	White	Anode
3	5	Red	Cathode

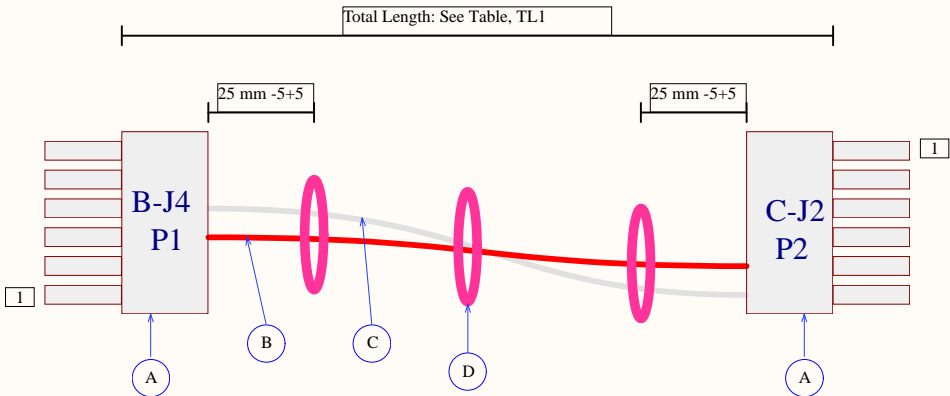


Table			
Var.	IFS P/N	CL1 [mm]	TL1 [mm]
1	102565	N/A	103 -0+8

General tolerance: +-0.1 mm, +-1°

Item	Quantity	Manufacturer P/N	Manufacturer	Comments	IFS ID
A	2	MSAP106SB	Axon Cables S.A.S	Microstrip 6-pin, female	103359
B	1	KT2419^D	Axon Cables S.A.S	24 AWG FEP Red	103390
C	1	KT2419^L	Axon Cables S.A.S	24 AWG FEP White	103381
D	3	To come	To come	Braided Polyester Lacing Tape, Type II	

ALL ARTICLES TO BE PRODUCED IN ACCORDANCE WITH: - IPC/WHMA-A-620C CLASS III - MANUFACTURER SPECIFIC RECOMMENDATIONS AND DESCRIPTIONS UNLESS OTHERWISE SPECIFIED	
102565 Harness SA PV E	
IFS document nr.: 1008459	GOMSPACE
Revision: 01	
Project: gs-hn-NanoHarness-SA_PV_E.PrjPcb	
Engineer: SRYT	
Date: 30-05-2018	
State of drawing: Preliminary	

Confidential - DO NOT DISTRIBUTE
Copyright © 2018 by GomSpace A/S
Langagervej 6
9220 Aalborg East
Denmark