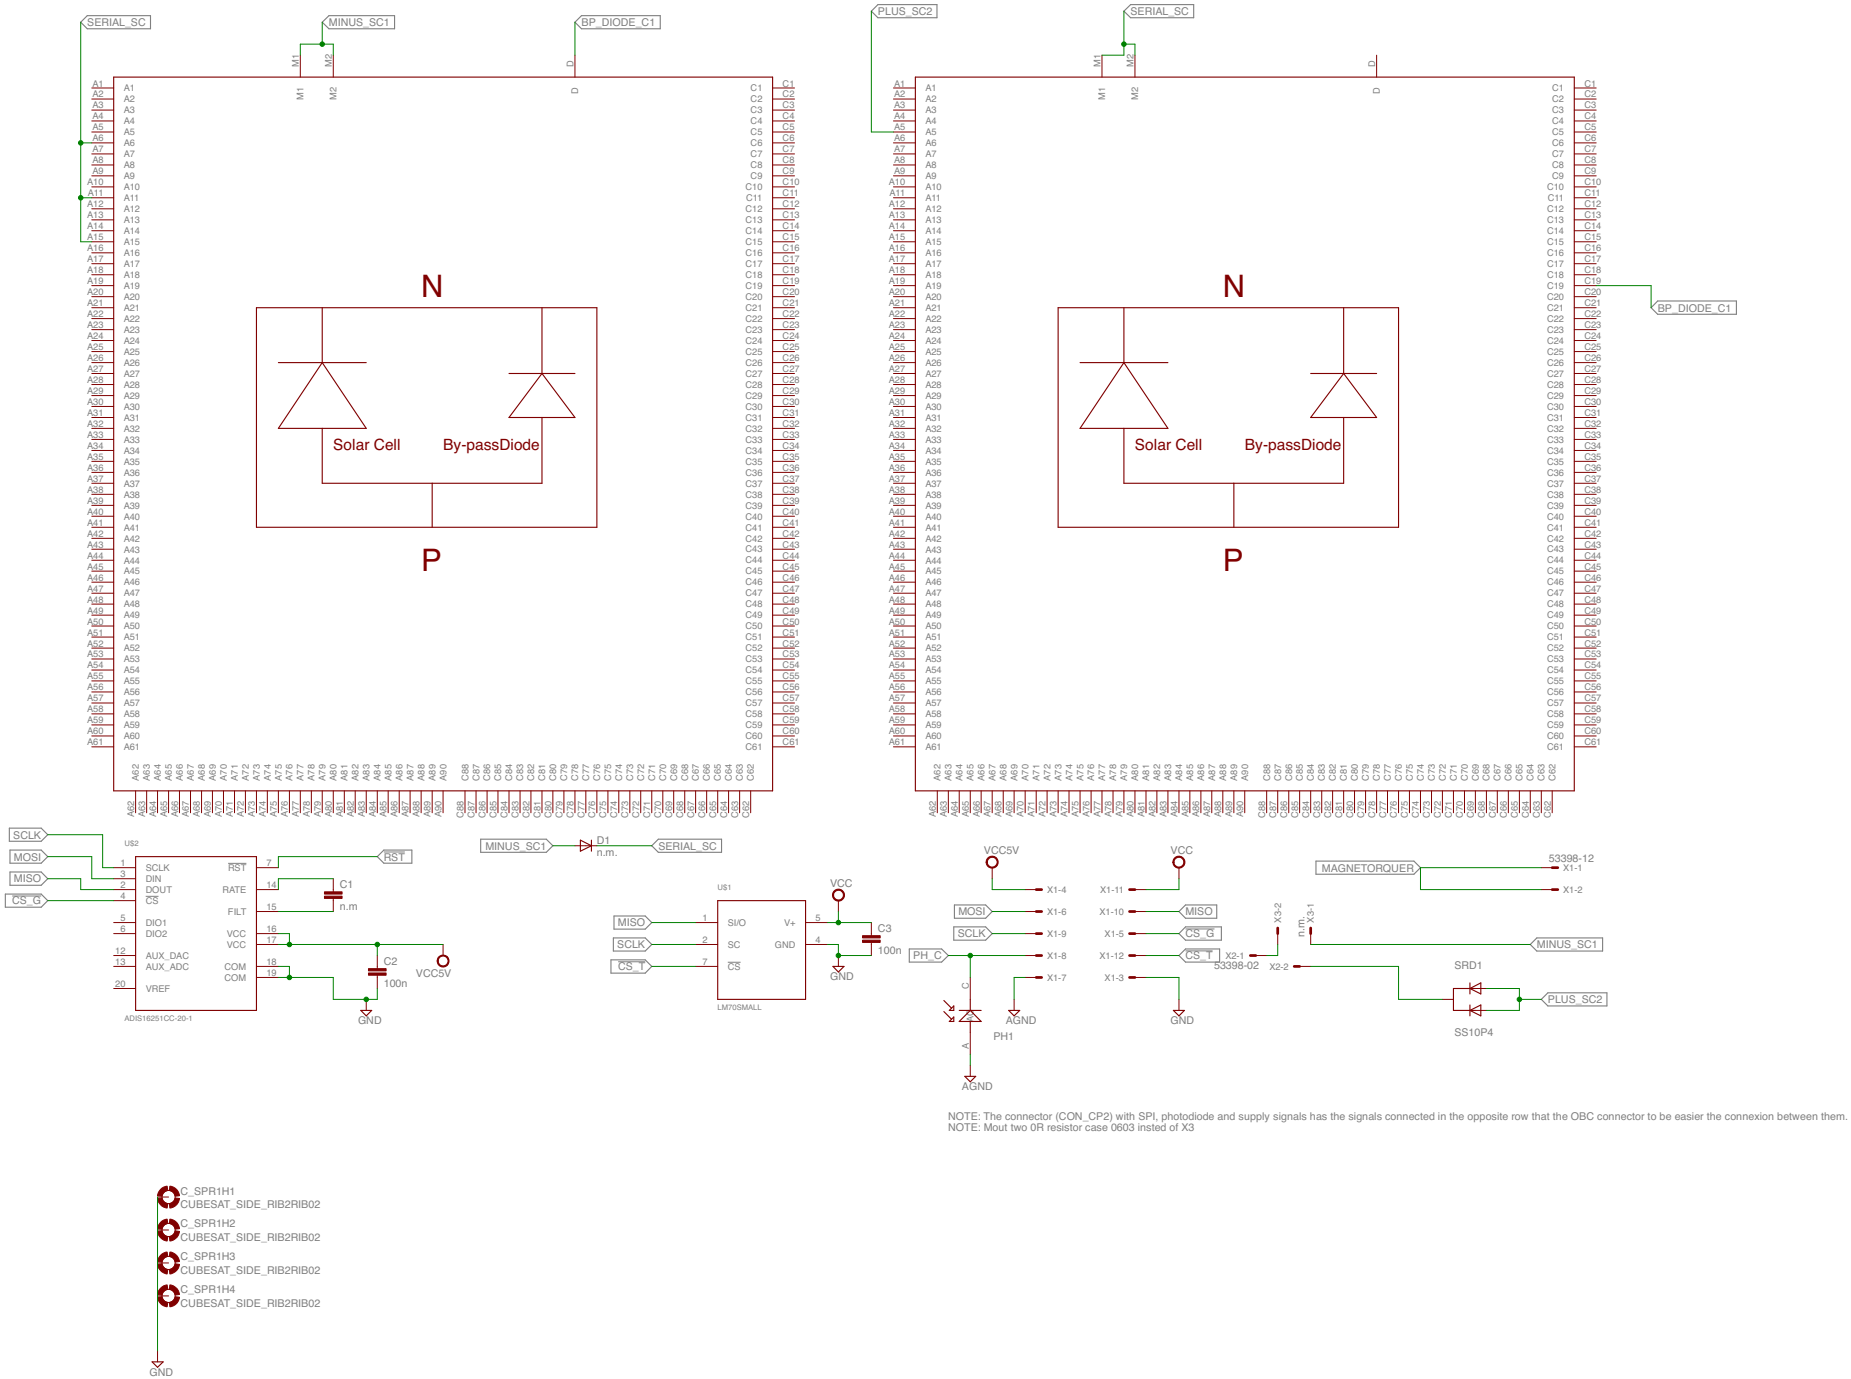

NOTE: The connector (CON_CP2) with SPI, photodiode and supply signals has the signals connected in the opposite row that the OBC connector to be easier the connexion between them.
NOTE: Mout two 0R resistor case 0603 insted of X3

08/08/11 13.50 f=0.57 /Volumes/Groups/subsystems/SolarPanels/Eagle/P100UB/P100UB.sch (Sheet: 1/1)