
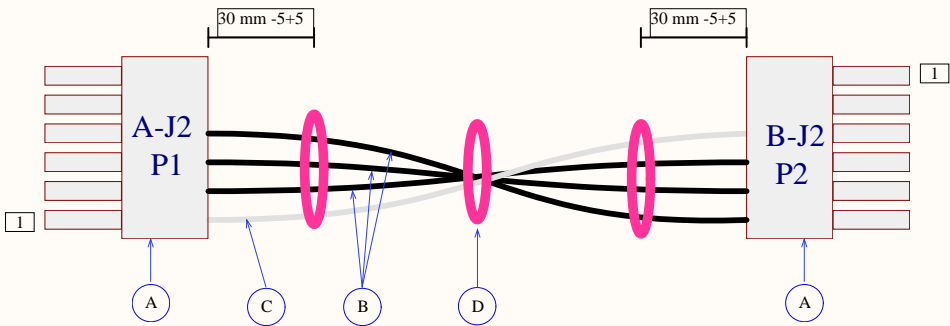


102554 Harness SA PV B

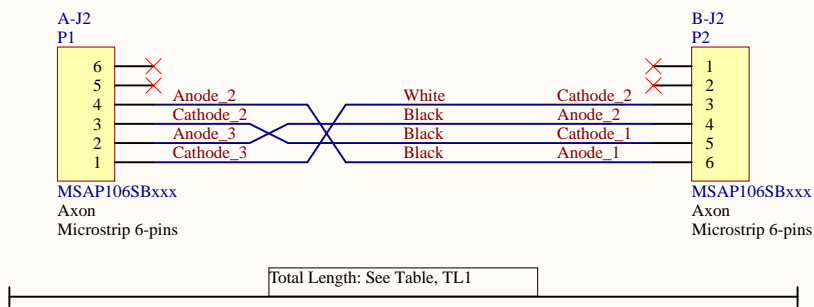

Wiring Chart			
P1	P2	Colour	Signal
4	6	Black	Anode
3	5	Black	Cathode
2	4	Black	Anode
1	3	White	Cathode

Table			
Var.	IFS P/N	CL1 [mm]	TL1 [mm]
1	102554	N/A	103 -0+8

General tolerance: +-0.1 mm, +-1°

Item	Quantity	Manufacturer P/N	Manufacturer	Comments	IFS ID
A	2	MSAP106SB	Axon Cables S.A.S	Microstrip 6-pin, female	103359
B	3	KT2419^B	Axon Cables S.A.S	24 AWG FEP Black	103382
C	1	KT2419^L	Axon Cables S.A.S	24 AWG FEP White	103381
D	3	To come	To come	Braided Polyester Lacing Tape, Type II	

Confidential - DO NOT DISTRIBUTE
Copyright © 2018 by GomSpace A/S
Langagervej 6
9220 Aalborg East
Denmark

ALL ARTICLES TO BE PRODUCED IN ACCORDANCE WITH:	
- IPC/WHMA-A-620C CLASS III	
- MANUFACTURER SPECIFIC RECOMMENDATIONS AND DESCRIPTIONS UNLESS OTHERWISE SPECIFIED	
102554 Harness SA PV B	
IFS document nr.:	1008456
Revision:	01
Project:	gs-hn-NanoHarness-SA_PV_B.PrjPcb
Engineer:	SRYT
Date:	30-05-2018
State of drawing:	Preliminary

GOMSPACE